

SENCOR[®]

SWS 135

USER'S MANUAL


**WEATHER STATION WITH CABLE
FREE IN-OUT THERMOMETER AND
RADIO CONTROLLED CLOCK**

EN

1. INTRODUCTION

The basic package comes with a main unit, which is the weather forecast station and, a remote unit, the thermo sensor.

The main unit is capable of keeping track of the maximum and minimum temperature of different sites. And no wire installation is required and operates at radio frequency 433 MHz.

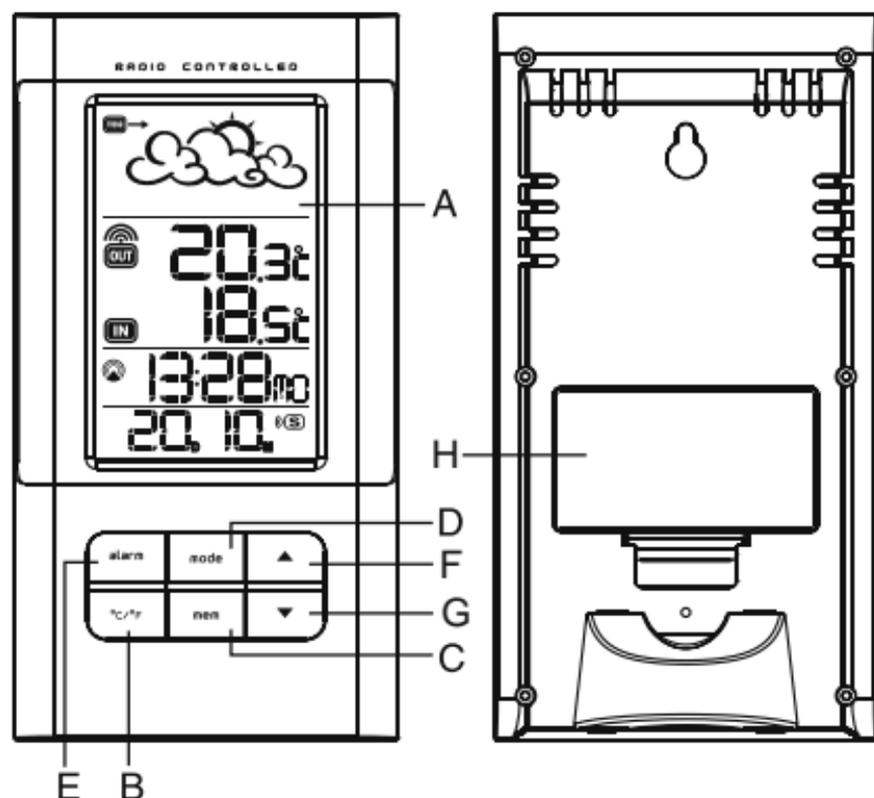

A DISPLAY

Facilitates easy reading of remote and indoors temperatures and calendar clock

B °C/°F BUTTON

Toggle for setting temperature display unit °C or °F

C MEMORY [MEM] BUTTON

Recalls the maximum or minimum temperature of main and remote unit

D MODE BUTTON

Toggles the display modes and confirms entry while setting the values for display

E ALARM BUTTON

Displays the alarm time or sets the alarm status

F UP BUTTON

Advances the value of a setting


G DOWN BUTTON

Decreases the value of a setting

H BATTERY COMPARTMENTS

Accommodates two UM-3 or "AA" size 1.5V batteries

MAIN FEATURES: REMOTE UNIT

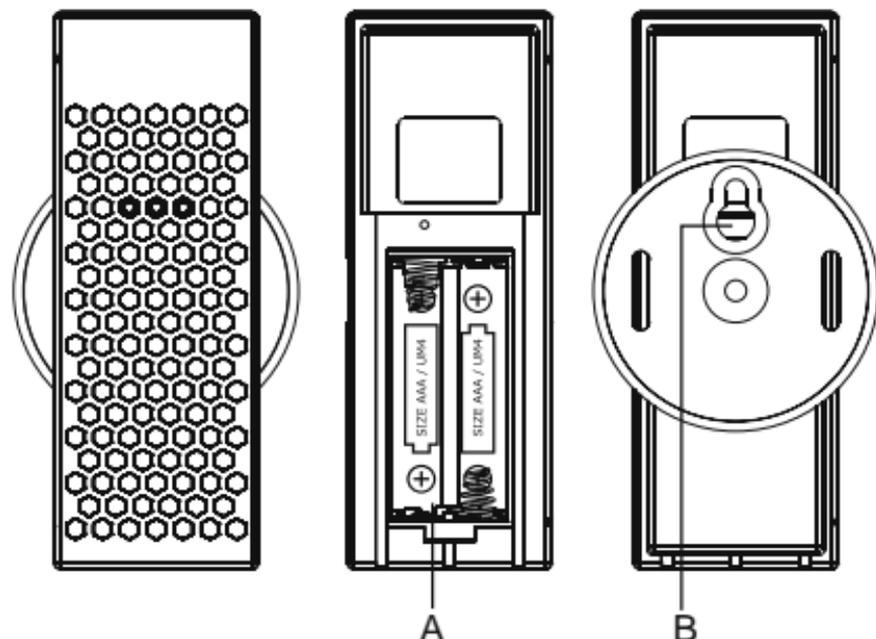

A BATTERY COMPARTMENT

Accommodates two AAA-size batteries

B WALL-MOUNT RECESSED HOLE

Supports the remote until in wall-mounting

2. GETTING STARTED

2a) BEFORE YOU BEGIN

For best operation,

1. Insert batteries for remote units before doing so for the main unit.
2. Position the remote unit and main unit within effective transmission range, which, in usual circumstances, is 20 to 30 meters.

Note that the effective range is vastly affected by the building materials and where the main and remote units are positioned.

Try various set-ups for best result.

Though the remote units are weather proof, they should be placed away from direct sunlight, rain or snow.

2b) BATTERY INSTALLATION: REMOTE UNIT

1. Remove the screws on the battery compartment.
2. Install 2 batteries (UM-4 or "AAA" size 1.5V) strictly according to the polarities shown.
3. Replace the battery compartment door and secure its screws.

2c) BATTERY INSTALLATION: MAIN UNIT

1. Open the battery compartment door.
2. Install 2 batteries (UM-3 or "AA" size 1.5V) strictly according to the polarities shown.
3. Replace the battery compartment door.

2d) LOW BATTERY WARNING: MAIN UNIT

When it is time to replace batteries, the respective low-battery indicator [🔋] next to the time with seconds will be shown on the main unit's display.

2e) GETTING STARTED

Once batteries are in place for the remote unit, they will start transmitting temperature readings at around 45 seconds intervals. The main unit will also start searching for signals for about two minutes once batteries are installed. Upon successful reception, the outdoors temperatures will be displayed. The main unit will automatically update its readings at about 45-second intervals.

If no signals are received, blanks " ".:" will be displayed.

Hold [▼] for 2 seconds to enforce another search for about 2 minutes. This is useful in synchronizing the transmission and reception of the remote and main units.

Repeat this step whenever you find discrepancies between the reading shown on the main unit and that on the remote unit.

3. WEATHER FORECAST

3a) WEATHER FORECAST

The unit is capable of detecting atmospheric pressure changes. Based on collected data, it can predict the weather for the forthcoming 12 to 24 hours.

Indicator displays on the unit					
Forecast	Sunny	Slightly Cloudy	Cloudy	Rainy	Snowy

NOTE:

1. It is not necessary and not possible to adjust the altitude of the weather station. After the initial start-up of the weather station, a first forecast will be made within the first 24 hours of operation.
2. In periods of long stable weather conditions, it becomes difficult to make a reliable forecast.
3. The weather forecast is solely calculated on the basis of barometric air pressure changes.
4. The probability of a correct weather forecast is approximately 70% and is valid for an area of approx. 20-30 km around the location of the weather station.
5. The forecast "Sunny" means at night "cloudless weather". Fog is not indicated by the weather station as this can occur with different weather conditions.
6. If you travel with the weather station, a reliable weather forecast will become impossible due to 24 hour so that the weather station can calculate a new forecast based on the conditions at the new location.

3b) ATMOSPHERIC PRESSURE

The atmospheric pressure indicator, in the weather forecast window, uses arrows to indicate if the atmospheric pressure is increasing, remaining stable, or decreasing.

Arrow indicator			
Pressure Trend	Rising	Steady	Falling

4. THERMOMETER

4a) HOW TO CHECK REMOTE AND INDOOR TEMPERATURES

The wave display on the outdoors temperature indicates the reception of the remote unit is in good order. If no readings are received from the remote unit for more than two minutes, blanks "---." will be displayed until further readings are successfully searched. Check the remote unit is sound and secure. You can wait for a little while or Hold [▼] for 2 seconds to enforce an immediate search. If the temperature goes above or below than the temperature measuring range of the main unit or the remote unit (stated in specification), the display will show "---."

4b) HOW TO READ THE KINETIC WAVE DISPLAY

The kinetic wave display shows the signal receiving status of the main unit. There are three possible forms:

The unit is in searching mode.	 ---.°C
Temperature readings are securely registered.	 25.4°C
No signals.	 ---.°C

4c) MAXIMUM AND MINIMUM TEMPERATURES

The maximum and minimum recorded indoor temperature, outdoor temperatures will be automatically stored in memory. To display them, Press **[MEM]** once to display the maximum readings and again the minimum readings. The respective indicators, **[MAX]** or **[MIN]** will be displayed. To clear the memory, hold down **[MEM]** for two seconds. The maximum and minimum readings will be erased. If you press **[MEM]** now, the maximum and minimum readings will have the same values as the current ones until different readings are recorded.

4d) DISCONNECTED SIGNALS

If without obvious reasons the display of the outdoor temperature goes blank, Hold **[▼]** for 2 seconds to enforce an immediate search.

If that fails, check:

1. The remote unit is still in place.
2. The batteries of both the remote unit and main unit. Replace as necessary.

Note: When the temperature falls below freezing point, the batteries of outdoor units will freeze, lowering their voltage supply and the effective range.

3. The transmission is within range and path is clear of obstacles and interference. Shorten the distance when necessary.

4e) TRANSMISSION COLLISION

Signals from other household devices, such as doorbells, home security systems and entry controls, may interfere with those of this product and cause temporarily reception failure. This is normal and does not affect the general performance of the product. The transmission and reception of temperature readings will resume once the interference recedes.

5. RADIO CONTROLLED CLOCK DCF77

5a) HOW TO SET THE RADIO CONTROLLED CLOCK

- * After the batteries are installed. The clock will automatically search the radio signal. It takes about 3-5 minutes to finish this process.
- * If the radio signal is received, the date & time will be set automatically with radio control signal icon [📶] turns on.
- * If the clock fails to receive the time signal, it will be with the [📶] icon turns off. Then user can set the time manually.
- * Radio-controlled signal will be scheduled to receive every hour.

 - Receiving	 - Strong	 - No signal	No symbol - signal reception disabled
--	--	---	---------------------------------------

5b) HOW TO SET THE CLOCK MANUALLY

To set the clock manually, hold **MODE** for two seconds it will show the year. Use [▼] or [▲] to change it.

Press **MODE** to confirm. Repeat the same procedure to set the month, date, date-month format, 12/24, hour, minute, display language, zone time offset.

During the setting, press and hold [▼] or [▲] will increase or decrease the value rapidly.

For display language, you can choose among English (EN), German (DE), French (FR), Italian (IT), Spanish (SP), Dutch (DU) and Swedish (SW) - in that order.

If there is an item you do not wish to change, simply press [**MODE**] to bypass the item.

When you finished the change, press [**MODE**] to exit.

The display will return to the clock mode.

5c) CALENDAR CLOCK DISPLAY MODES

The time is displayed in hour-minute format.

The calendar is displayed in a day-month format.

Each press on the **MODE** button will change the display between clock with second, clock with day of week, zone time with day of week, and zone time with second.

5d) HOW TO SET THE TIME ZONE

To set the zone time,

1. Press **[MODE]** until at zone time display mode,
2. Hold **[MODE]** for two seconds, the zone time offset will be displayed.
3. Enter the offset using **[▼]** or **[▲]**.
4. Press **[MODE]** to exit.

The alarm "Ⓜ" "Ⓢ" icons will be displayed indicating which alarm is armed. You can also arm or disarm an alarm by pressing the **[▲]**, **[▼]** button at alarm display mode.

Press **MODE** to return to clock display mode.

6. BELL/ALARM

6a) HOW TO SET AND ARM THE ALARM

To set an alarm,

1. Press **[ALARM]** once to display alarm time. If the alarm is disarmed, the time will be displayed as "OFF".
2. Hold **[ALARM]** for two seconds. The hour digits will blink.
3. Enter the hour using **[▼]** or **[▲]**.
4. Press **[ALARM]**. The minute digits will blink.
5. Enter the minutes using **[▼]** or **[▲]**.
6. Press **[ALARM]** to exit.
7. Repeat the same procedure to set single alarm.

6b) ALARM FEATURE

- * **Weekday Alarm**

The alarm sound will be activated and the icon will be flashed on weekday when it is armed and the alarm time is reach.

- * **Single Alarm**

The alarm sound will be activated and the icon will be flashed once when it is armed and the alarm time is reach. Once it finished, it will be disabled automatically.

6c) HOW TO STOP AN ALARM

Press **[ALARM]** on the unit to stop an alarm.

7. SPECIFICATIONS

Temperature Measurement

Main unit

Indoor Temperature measurement

Proposed operating range : 0 °C to + 50 °C

Temperature resolution : 0.1 °C
0.2 °F

Remote unit

Proposed operating range : -20 °C to + 60 °C

Temperature resolution : 0.1 °C
0.2 °F

RF Transmission Frequency : 433 MHz

RF Transmission Range : Maximum 30 meters
(in open space without
electromagnetic
interference)

Temperature sensing cycle : around 43~47
seconds

Power

Main unit : use 2 pes UM-3 or
"AA" 1.5 V battery

Remote sensing unit : use 2 pes UM-4 or
"AAA" 1.5V battery

Weight

Main unit : 154g (without battery)

Remote sensing unit : 43g (without battery)

Dimension

Main unit : 86 × 165 × 28 mm

Remote sensing unit : 37.5 × 110 × 23 mm

PRECAUTIONS

This product is engineered to give you years of satisfactory service if you handle it carefully. Here are a few precautions:

1. Do not immerse the unit in water.
2. Do not clean the unit with abrasive or corrosive materials. They may scratch the plastic parts and corrode the electronic circuit.
3. Do not subject the unit to excessive force, shock, dust, temperature or humidity, which may result in malfunction, shorter electronic life span, damaged battery and distorted parts.
4. Do not tamper with the unit's internal components. Doing so will invalidate the warranty on the unit and may cause unnecessary damage. The unit contains no user-serviceable parts.
5. Only use fresh batteries as specified in the user's manual. Do not mix new and old batteries as the old ones may leak.
6. Always read the user's manual thoroughly before operating the unit.

CAUTION

- The content of this manual is subject to change without further notice.
- Due to printing limitation, the displays shown in this manual may differ from the actual display.
- The contents of this manual may not be reproduced without the permission of the manufacturer.

INSTRUCTIONS AND INFORMATION REGARDING THE DISPOSAL OF USED PACKAGING MATERIALS

Dispose of packaging material at a public waste disposal site.

DISPOSAL OF USED ELECTRICAL AND ELECTRONIC APPLIANCES



The meaning of the symbol on the product, its accessory or packaging indicates that this product shall not be treated as household waste. Please, dispose of this product at your applicable collection point for the recycling of electrical & electronic equipment waste. Alternatively in some states of the European Union or other European states you may return your products to your local retailer when buying an equivalent new product. The correct disposal of this product will help save valuable natural resources and help in preventing the potential negative impact on the environment and human health, which could be caused as a result of improper liquidation of waste. Please ask your local authorities or the nearest waste collection centre for further details. The improper disposal of this type of waste may fall subject to national regulations for fines.

For business entities in the European Union

If you wish to dispose of an electrical or electronic device, request the necessary information from your seller or supplier.

Disposal in other countries outside the European Union

If you wish to dispose of this product, request the necessary information about the correct disposal method from local government departments or from your seller.

Changes to the text, design and technical specifications may occur without prior notice and we reserve the right to make these changes.

 Fast ČR, a.s. declares that the SWS 135 conforms to the basic requirements and other relevant provisions of the directive 1999/5/ES. The device can be operated in the EU without restriction. The declaration of conformity is a part of the user's manual or can be found at the website www.sencor.eu.

SENCOR®

EN Warranty conditions

Warranty card is not a part of the device packaging.

This product is warranted for the period of 24 months from the date of purchase to the end-user. Warranty is limited to the following conditions. Warranty is referred only to the customer goods using for common domestic use. The claim for service can be applied either at dealer's shop where the product was bought, or at below mentioned authorized service shops. The end-user is obligated to set up a claim immediately when the defects appeared but only till the end of warranty period. The end user is obligated to cooperate to certify the claiming defects. Only completed and clean (according to hygienic standards) product will be accepted. In case of eligible warranty claim the warranty period will be prolonged by the period from the date of claim application till the date of taking over the product by end-user, or the date the end-user is obligated to take it over. To obtain the service under this warranty, end-user is obligated to certify his claim with duly completed following documents: receipt, certificate of warranty, certificate of installation.

This warranty is void especially if apply as follows:

- Defects which were put on sale.
- Wear-out or damage caused by common use.
- The product was damaged by unprofessional or wrong installation, used in contrary to the applicable instruction manual, used in contrary to legal enactment and common process of use or used for another purpose which has been designed for.
- The product was damaged by uncared-for or insufficient maintenance.
- The product was damaged by dirt, accident of force majeure (natural disaster, fire, and flood).
- Defects on functionality caused by low duality of signal, electromagnetic field interference etc.
- The product was mechanically damaged (e.g. broken button, fall).
- Damage caused by use of unsuitable media, fillings, expendable supplies (batteries) or by unsuitable working conditions (e.g. high temperatures, high humidity, quakes).
- Repair, modification or other failure action to the product by unauthorized person.
- End-user did not prove enough his right to claim (time and place of purchase).
- Data on presented documents differs from data on products.
- Cases when the claiming product cannot be indentified according to the presented documents (e.g. the serial number or the warranty seal has been damaged).

Authorized service centers

Visit www.sencor.eu for detailed information about authorized service centers.