

**SENCOR**



AUTUMN 2019

**CONSUMER ELECTRONICS**





# CONTENTS

## CONSUMER ELECTRONICS

### Televisions

- 3 SMART TV
- 5 FULL HD
- 6 HD READY

### TV accessories

- 10 SET-TOP-BOXES
- 12 ANTENNAS
- 15 TV HOLDERS

### Mobile phones and tablets

- 17 CLASSIC
- 19 TABLETS
- 20 ACCESSORIES

### Home multimedia

- 22 TABLE DVD
- 23 PORTABLE TV
- 24 PORTABLE DVD

### Audio

- 27 HOME BLUETOOTH SPEAKERS
- 29 BLUETOOTH SPEAKERS
- 32 AUDIO SYSTEMS
- 33 MICROSYSTEMS
- 34 TURNTABLES
- 35 INTERNET RADIOS
- 36 CD PLAYERS
- 40 PORTABLE RADIOS
- 43 RADIO CLOCKS
- 45 MP3 PLAYERS
- 46 EARPHONES/HEADPHONES

### Cameras

- 50 ACTION CAMERAS
- 52 ACCESSORIES

### House

- 54 WEATHER STATIONS
- 66 DIGITAL CLOCKS
- 70 WIRELESS DOORBELLS
- 71 DIGITAL PHOTOFRAMES

### Car accessories

- 74 CAR CAMERAS
- 75 CAR RADIOS
- 77 SUBWOOFERS
- 78 SPEAKERS
- 79 PARKING SYSTEMS
- 80 CAR ADAPTER
- 81 ALCOHOLTESTERS
- 82 FM MODULATORS

### Office

- 86 SHREDDERS
- 87 TRIMMERS
- 88 LAMINATORS

### Others

- 90 TIMERS
- 91 CHARGERS
- 92 SOCKETS
- 93 MOBILE RADIOS
- 94 LIGHTS
- 100 CLEANING AGENTS
- 101 SURGE PROTECTORS
- 102 GAMES



## Televisions >

- 3 SMART TV
- 5 FULL HD
- 6 HD READY





## ○ SLE 55US600TCS UHD SMART TELEVISION

- SMART NETFLIX
- Panel Size 139 cm (55"), UHD
- HD DVB-T/T2/C/S/S2 Tuners

### Picture:

- Panel Size 139 cm (55")
- UHD
- 3840 x 2160 Pixel Resolution
- D-LED
- Brightness 260cd/m<sup>2</sup>
- Response Time 6.5ms
- Wide Viewing Angle 178°/178°
- Digital Comb Filter (DCF)
- Dynamic Noise Reduction Circuits (DNR)

### SMART Interface:

- SMART TV Interface - Netflix, Youtube, APP Store
- HbbTV (Hybrid Broadcast Broadband TV)
- Wi-Fi Built-in Modul
- Miracast

### Signal Reception:

- DVB-T2 (H.265, max. 3840 x 2160/60p)
- DVB-T
- DVB-C
- DVB-S2 (H.265, max. 3840 x 2160/60p)
- PAL/SECAM BG/DK/I/L/L'

### Sound:

- Output Power 2 x 8W
- Equalizer

### Inputs and outputs:

- 3x HDMI (1xARC), Mini AV in, RJ45, Optical, 2x USB 2.0 (5V ~ 0.5A), Headphone Jack
- CI+ interface

### Supported formats:

- Video: MKV, AVI, MP4, MOV, XviD
- Audio: MP3, AAC, WAV



## ○ SLE 49US600TCS UHD SMART TELEVISION

- SMART NETFLIX
- Panel Size 123 cm (49"), UHD
- HD DVB-T/T2/C/S/S2 Tuners

### Picture:

- Panel Size 123 cm (49")
- UHD
- 3840 x 2160 Pixel Resolution
- D-LED
- Brightness 260cd/m<sup>2</sup>
- Response Time 6.5ms
- Wide Viewing Angle 178°/178°
- Digital Comb Filter (DCF)
- Dynamic Noise Reduction Circuits (DNR)

### SMART Interface:

- SMART TV Interface - Netflix, Youtube, APP Store
- HbbTV (Hybrid Broadcast Broadband TV)
- Wi-Fi Built-in Modul
- Miracast

### Signal Reception:

- DVB-T2 (H.265, max. 3840 x 2160/60p)
- DVB-T
- DVB-C
- DVB-S2 (H.265, max. 3840 x 2160/60p)
- PAL/SECAM BG/DK/I/L/L'

### Sound:

- Output Power 2 x 8W
- Equalizer

### Inputs and outputs:

- 3x HDMI (1xARC), Mini AV in, RJ45, Optical, 2x USB 2.0 (5V ~ 0.5A), Headphone Jack
- CI+ interface

### Supported formats:

- Video: MKV, AVI, MP4, MOV, XviD
- Audio: MP3, AAC, WAV



## ○ SLE 43US600TCS UHD SMART TELEVISION

- SMART NETFLIX
- Panel Size 109 cm (43"), UHD
- HD DVB-T/T2/C/S/S2 Tuners

### Picture:

- Panel Size 109 cm (43")
- UHD
- 3840 x 2160 Pixel Resolution
- D-LED
- Brightness 240cd/m<sup>2</sup>
- Response Time 9ms
- Wide Viewing Angle 178°/178°
- Digital Comb Filter (DCF)
- Dynamic Noise Reduction Circuits (DNR)

### SMART Interface:

- SMART TV Interface - Netflix, Youtube, APP Store
- HbbTV (Hybrid Broadcast Broadband TV)
- Wi-Fi Built-in Modul (2.4 GHz)
- Miracast

### Supported formats:

- Video: MKV, AVI, MP4, MOV, XviD
- Audio: MP3, AAC, WAV
- Photo: JPEG, JPG

### Other:

- Recording to USB Drive (PVR - TS format) / Playback from USB Drive
- Timeshift
- OSD: EN, CZE, POL, HUN, SVK, GER, FRE, ITA, SPA, GRC, HRV, SRP, BUL, SLV, LIT, RUS, DUT
- Electronic Programme Guide (EPG)
- Teletext
- Clock, Timer
- Parental Lock
- Hotel Mode

### Power, Consumption and Dimensions:

- Power: AC 100-240V 50/60Hz
- Energy Efficiency: 68W / <0.5W in standby mode
- Dimensions with Stand: 970 x 611 x 210mm
- Dimensions without Stand: 970 x 566 x 81mm
- Weight: 7.4kg
- VESA: 200 x 200





## ○ SLE 43FS600TCS

### FULL HD SMART TELEVISION

- SMART NETFLIX
- Panel Size 109 cm (43"), FULL HD
- HD DVB-T/T2/C/S/S2 Tuners

#### Picture:

- Panel Size 109 cm (43")
- Full HD
- 1920 x 1080 Pixel Resolution
- D-LED
- Brightness 240cd/m<sup>2</sup>
- Response Time 8ms
- Wide Viewing Angle 178°/178°
- Digital Comb Filter (DCF)
- Dynamic Noise Reduction Circuits (DNR)

#### SMART Interface:

- SMART TV Interface - Netflix, Youtube, APP Store
- HbbTV (Hybrid Broadcast Broadband TV)
- Wi-Fi Built-in Modul
- DLNA Support
- Wireless Display



## ○ SLE 40FS600TCS

### FULL HD SMART TELEVISION

- SMART NETFLIX
- Panel Size 101 cm (40"), FULL HD
- HD DVB-T/T2/C/S/S2 Tuners

#### Picture:

- Panel Size 101 cm (40")
- Full HD
- 1920 x 1080 Pixel Resolution
- D-LED
- Brightness 240cd/m<sup>2</sup>
- Response Time 8.5ms
- Wide Viewing Angle 178°/178°
- Digital Comb Filter (DCF)
- Dynamic Noise Reduction Circuits (DNR)

#### SMART Interface:

- SMART TV Interface - Netflix, Youtube, APP Store
- HbbTV (Hybrid Broadcast Broadband TV)
- Wi-Fi Built-in Modul
- DLNA Support
- Wireless Display



## ○ SLE 32S600TCS

### HD READY SMART TELEVISION

- SMART NETFLIX
- Panel Size 80 cm (32"), HD Ready
- HD DVB-T/T2/C/S/S2 Tuners

#### Picture:

- Panel Size 80 cm (32")
- HD Ready
- 1366 x 768 Pixel Resolution
- D-LED
- Brightness 220cd/m<sup>2</sup>
- Response Time 6.5ms
- Wide Viewing Angle 178°/178°
- Digital Comb Filter (DCF)
- Dynamic Noise Reduction Circuits (DNR)

#### SMART Interface:

- SMART TV Interface - Netflix, Youtube, APP Store
- HbbTV (Hybrid Broadcast Broadband TV)
- Wi-Fi Built-in Modul
- DLNA Support
- Wireless Display





## ○ SLE 43F16TCS

### FULL HD TELEVISION

- Panel Size 109cm (43"), FULL HD
- HD DVB-T/T2/C/S/S2 Tuners
- USB Recording and Playback

#### Picture:

- Panel Size 109cm (43")
- Full HD
- Resolution 1920 x 1080 pixels
- D-LED
- Brightness 220cd/m<sup>2</sup>
- Response Time 8ms
- Wide Viewing Angle 178°/178°
- Digital Comb Filter (DCF)
- Dynamic Noise Reduction Circuits (DNR)

#### Signal Reception:

- DVB-T2 (H.265, max. 1920 x 1080/60p)
- DVB-T
- DVB-C
- DVB-S2 (Skylink FastScan Tuning)
- PAL/SECAM BG/DK/I



## ○ SLE 40F16TCS

### FULL HD TELEVISION

- Panel Size 100cm (40"), FULL HD
- HD DVB-T/T2/C/S/S2 Tuners
- USB Recording and Playback

#### Picture:

- Panel Size 100cm (40")
- Full HD
- Resolution 1920 x 1080 pixels
- D-LED
- Brightness 220cd/m<sup>2</sup>
- Response Time 6ms
- Wide Viewing Angle 178°/178°
- Digital Comb Filter (DCF)
- Dynamic Noise Reduction Circuits (DNR)

#### Signal Reception:

- DVB-T2 (H.265, max. 1920 x 1080/60p)
- DVB-T
- DVB-C
- DVB-S2 (Skylink FastScan Tuning)
- PAL/SECAM BG/DK/I



## ○ SLE 22F60TCS

### FULL HD TELEVISION

- Panel Size 55 cm (22"), Full HD
- HD DVB-T/T2/C/S/S2 Tuners
- USB Recording and Playback

#### Picture:

- Panel Size 55 cm (22")
- Full HD
- Resolution 1920 x 1080 pixels
- D-LED
- Brightness 165cd/m<sup>2</sup>
- Response Time 6.5ms
- Wide Viewing Angle 178°/178°
- Digital Comb Filter (DCF)
- Dynamic Noise Reduction Circuits (DNR)

#### Signal Reception:

- DVB-T2 (H.265, max. 1920 x 1080/60p)
- DVB-T
- DVB-C
- DVB-S2 (Skylink FastScan Tuning)
- PAL/SECAM BG/DK/I







# HD READY



## ○ SLE 3226TCS HD READY TELEVIZOR

- Panel Size 81 cm (32"), HD Ready
- HD DVB-T/T2/C/S/S2 Tuners
- USB Recording and Playback

### Picture:

- Panel Size 81 cm (32")
- HD Ready
- Resolution 1366 x 768 pixels
- D-LED
- Brightness 200cd/m<sup>2</sup>
- Response Time 8.5ms
- Wide Viewing Angle 178°/178°
- Digital Comb Filter (DCF)
- Dynamic Noise Reduction Circuits (DNR)

### Signal Reception:

- DVB-T2 (H.265, max. 1920 x 1080/60p)
- DVB-T
- DVB-C
- DVB-S2 (Skylink FastScan Tuning)



## ○ SLE 3225TCS HD READY TELEVISION

- Panel Size 81 cm (32"), HD Ready
- HD DVB-T/T2/C/S/S2 Tuners
- USB Recording and Playback

### Picture:

- Panel Size 81 cm (32")
- HD Ready
- Resolution 1366 x 768 pixels
- D-LED
- Brightness 200cd/m<sup>2</sup>
- Response Time 8ms
- Wide Viewing Angle 178°/178°
- Digital Comb Filter (DCF)
- Dynamic Noise Reduction Circuits (DNR)

### Signal Reception:

- DVB-T2 (H.265, max. 1920 x 1080/60p)
- DVB-T
- DVB-C



## ○ SLE 2814TCS HD READY TELEVISION

- Panel Size 71 cm (28"), HD Ready
- HD DVB-T/T2/C/S/S2 Tuners
- USB Recording and Playback

### Picture:

- Panel Size 71 cm (28")
- HD Ready
- Resolution 1366 x 768 pixels
- D-LED
- Brightness 200cd/m<sup>2</sup>
- Response Time 8ms
- Wide Viewing Angle 178°/178°
- Digital Comb Filter (DCF)
- Dynamic Noise Reduction Circuits (DNR)

### Signal Reception:

- DVB-T2 (H.265, max. 1920 x 1080/60p)
- DVB-T
- DVB-C





## ○ SLE 3260TCS

### HD READY TELEVISION

- Panel Size 81 cm (32"), HD Ready
- HD DVB-T/T2/C/S/S2 Tuners
- USB Recording and Playback
- Metal Body

#### Picture:

- Panel Size 81 cm (32")
- HD Ready
- Resolution 1366 x 768 pixels
- D-LED
- Brightness 200cd/m<sup>2</sup>
- Response Time 10ms
- Wide Viewing Angle 178°/178°
- Digital Comb Filter (DCF)
- Dynamic Noise Reduction Circuits (DNR)

#### Signal Reception:

- DVB-T2 (H.265, max. 1920 x 1080/60p)
- DVB-T
- DVB-C



## ○ SLE 2467TCS

### HD READY TELEVISION

- Panel Size 60cm (24"), HD Ready
- HD DVB-T/T2/C/S/S2 Tuners
- USB Recording and Playback

#### Picture:

- Panel Size 60cm (24")
- HD Ready
- Resolution 1366 x 768 pixels
- D-LED
- Brightness 200 cd/m<sup>2</sup>
- Response Time 14 ms
- Wide Viewing Angle 178°/178°
- Digital Comb Filter (DCF)
- Dynamic Noise Reduction Circuits (DNR)

#### Signal Reception:

- DVB-T2 (H.265, max. 1920 x 1080/60p)
- DVB-T
- DVB-C
- DVB-S2 (Skylink FastScan Tuning)



## ○ SLE 1962TCS

### HD READY TELEVISION

- Panel Size 47cm (19"), HD Ready
- HD DVB-T/T2/C/S/S2 Tuners
- USB Recording and Playback

#### Picture:

- Panel Size 47 cm (19")
- HD Ready
- Resolution 1366 x 768 pixels
- D-LED
- Brightness 200 cd/m<sup>2</sup>
- Response Time 14 ms
- Wide Viewing Angle 178°/178°
- Digital Comb Filter (DCF)
- Dynamic Noise Reduction Circuits (DNR)

#### Signal Reception:

- DVB-T2 (H.265, max. 1920 x 1080/60p)
- DVB-T
- DVB-C
- DVB-S2 (Skylink FastScan Tuning)
- PAL/SECAM BG/DK/I/L/L'






# TELEVISIONS



| MODEL                               | SLE<br>55US600TCS  | SLE<br>49US600TCS  | SLE<br>43FS600TCS  | SLE<br>40FS600TCS  | SLE<br>32S600TCS   | SLE<br>43FI6TCS    | SLE<br>40FI6TCS    | SLE<br>22FS0TCS    | SLE<br>32Z5TCS     | SLE<br>284TCS      | SLE<br>2467TCS     | SLE<br>1962TCS     | SLE<br>1962TCS     |
|-------------------------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| Diagonal in inch / cm               | 55"/139cm          | 49"/123cm          | 43"/109cm          | 40"/101cm          | 32"/80cm           | 43"/109cm          | 40"/100cm          | 22"/55cm           | 32"/81cm           | 32"/81cm           | 28"/71cm           | 32"/81cm           | 19"/47cm           |
| Panel resolution (px)               | 3840x2160          | 3840x2160          | 1920x1080          | 1920x1080          | 1366x768           | 1920x1080          | 1920x1080          | 1920x1080          | 1366x768           | 1366x768           | 1366x768           | 1366x768           | 1366x768           |
| Frequency (Hz)                      | 50                 | 50                 | 50                 | 50                 | 50                 | 50                 | 50                 | 50                 | 50                 | 50                 | 50                 | 50                 | 50                 |
| LED illumination                    | Yes                | Yes                | Yes                | Yes                | Yes                | Yes                | Yes                | Yes                | Yes                | Yes                | Yes                | Yes                | Yes                |
| Viewing angle (°)                   | 178/178            | 178/178            | 178/178            | 178/178            | 178/178            | 178/178            | 178/178            | 178/178            | 178/178            | 178/178            | 178/178            | 178/178            | 178/178            |
| Response time (ms)                  | 6,5                | 6,5                | 8                  | 8,5                | 6,5                | 8                  | 6                  | 6,5                | 8,5                | 8                  | 8                  | 10                 | 14                 |
| TV tuner                            | HD DVB-T2/C/<br>S2 | HD DVB-T2/C/<br>S2 | HD DVB-T2/C/<br>S2 | HD DVB-T2/C/<br>S2 | HD DVB-T2/C/<br>S2 | HD DVB-T2/C/<br>S2 | HD DVB-T2/C/<br>S2 | HD DVB-T2/C/<br>S2 | HD DVB-T2/C/<br>S2 | HD DVB-T2/C/<br>S2 | HD DVB-T2/C/<br>S2 | HD DVB-T2/C/<br>S2 | HD DVB-T2/C/<br>S2 |
| Off-timer                           | Yes                | Yes                | Yes                | Yes                | Yes                | Yes                | Yes                | Yes                | Yes                | Yes                | Yes                | Yes                | Yes                |
| USB                                 | Yes (0,5A)         | Yes (0,5A)         | Yes (0,5A)         | Yes (0,5A)         | Yes (0,5A)         | Yes (0,5A)         | Yes (0,5A)         | Yes (0,5A)         | Yes (0,5A)         | Yes (0,5A)         | Yes                | Yes                | Yes                |
| Playback from USB - video           | Yes                | Yes                | Yes                | Yes                | Yes                | Yes                | Yes                | Yes                | Yes                | Yes                | Yes                | Yes                | Yes                |
| Playback from USB - photo           | Yes                | Yes                | Yes                | Yes                | Yes                | Yes                | Yes                | Yes                | Yes                | Yes                | Yes                | Yes                | Yes                |
| Playback from USB - music           | Yes                | Yes                | Yes                | Yes                | Yes                | Yes                | Yes                | Yes                | Yes                | Yes                | Yes                | Yes                | Yes                |
| TV broadcast record on USB          | Yes                | Yes                | Yes                | Yes                | Yes                | Yes                | Yes                | Yes                | Yes                | Yes                | Yes                | Yes                | Yes                |
| CI + slot                           | Yes                | Yes                | Yes                | Yes                | Yes                | Yes                | Yes                | Yes                | Yes                | Yes                | Yes                | Yes                | Yes                |
| SCART amount                        | No                 | No                 | Yes                | No                 | No                 | No                 | No                 | No                 | Yes                | No                 | Yes                | Yes                | Yes                |
| VGA                                 | No                 | No                 | No                 | No                 | No                 | Yes                | Yes                | No                 | Yes                | No                 | Yes                | No                 | No                 |
| CompoNort input YPbPr               | No                 | No                 | Yes                | No                 | No                 | Yes                | Yes                | No                 | Yes                | Yes                | Yes                | Yes                | Yes                |
| Headphones connection               | Yes                | Yes                | Yes                | Yes                | Yes                | Yes                | Yes                | Yes                | Yes                | No                 | Yes                | Yes                | Yes                |
| HDMI amount                         | 3                  | 3                  | 3                  | 2                  | 2                  | 3                  | 3                  | 1                  | 3                  | 2                  | 3                  | 2                  | 1                  |
| Color                               | Black              | Black              | Black              | Black              | Black              | Black              | Black              | Black              | Black              | Black              | Black              | Black              | Black              |
| Dimensions with stand - width (mm)  | 1242               | 1103               | 967                | 906                | 732                | 968                | 911                | 505                | 730                | 732                | 637                | 718                | 440                |
| Dimensions with stand - height (mm) | 782                | 689                | 606                | 569                | 479                | 609                | 567                | 341                | 469                | 476                | 414                | 461                | 309                |
| Dimensions with stand - depth (mm)  | 285                | 240                | 215                | 221                | 181                | 207                | 212                | 134                | 204                | 207                | 202                | 214                | 147                |
| Dimensions w/o stand - width (mm)   | 1242               | 1103               | 967                | 906                | 732                | 968                | 911                | 505                | 730                | 732                | 637                | 718                | 440                |
| Dimensions w/o stand - height (mm)  | 720                | 640                | 561                | 521                | 432                | 566                | 522                | 303                | 428                | 434                | 380                | 427                | 280                |
| Dimensions w/o stand - depth (mm)   | 86                 | 85                 | 95                 | 85                 | 80                 | 92                 | 94                 | 80                 | 83                 | 88                 | 87                 | 83                 | 69                 |
| Weight (kg)                         | 13,2               | 10,8               | 7,6                | 6,7                | 4,2                | 6,8                | 6,5                | 2,2                | 3,7                | 4                  | 3,5                | 4,3                | 1,8                |





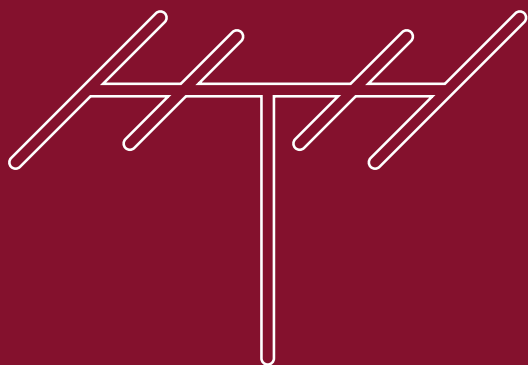

## TV accessories >

- 10 SET-TOP-BOXES
- 12 ANTENNAS
- 15 TV HOLDERS

# SET-TOP-BOXES



## SDB 5104TD

### SET-TOP-BOX

- SDB 5104TD is a new-generation set-top box ready for upcoming DVB-T2 terrestrial broadcasting with H.265 codec (HEVC). This model is equipped with dual tuner, which bring parallel watching and record two different channels. With HDMI and SCART connector you can connect any of your televisions, whether it be newer or older model. You can play movies, music or photos over the USB interface. You can browse and schedule your favorite shows in the Electronic Program Guide.

#### Signal Reception:

- 2x DVB-T2 - HEVC/H.265 (1080P 60fps) / DVB-T - MPEG-2/MPEG-4 (H.264)
- Inputs and outputs:
- Antenna Power Supply 5V/50mA - RF In and Out
- HDMI 1.3 Video Output (1080p)
- SCART Video Output
- 2x USB Port
- Coaxial Digital Audio Output
- RJ 45 Network

#### Supported USB formats:

- Video: AVI, TS, TRP, MP4, MKV, MOV, MPG, VOB
- Audio: MP3, FLAC
- Picture: JPG, JPEG, BMP

#### Other:

- USB - Recording, Timeshift, Media Playback
- 7 Days EPG (Electronic Programme Guide)
- Teletext
- TV + Radio Channel List
- Favorite Channel List
- Parental Lock
- Aspect Ratio Handling
- Booking Timer (Up to 8 Events), Sleep Timer
- 16:9/4:3 Format Compatible
- Supply: 12V= /1A
- Power Adaptor: 100-240V~ 50/60Hz
- Power Consumption: Max 7W
- Stand-By Power Consumption: Max 1W
- Dimension: 188 x 42 x 134mm

## SDB 5003T

### SET-TOP-BOX

- DIGITAL TERRESTRIAL RECEIVER
- SDB 5003T is a new-generation set-top box ready for future DVB-T2 terrestrial broadcasting with H.265 codec. This model is equipped with an HDMI and SCART connector to connect to any of your televisions, whether it be newer or older model. You can play movies, music or photos over the USB interface. You can browse and schedule your favorite shows in the Electronic Program Guide.

#### Signal Reception:

- DVB-T2 - HEVC/H.265 (1080P 60fps)
- DVB-T - MPEG-2/MPEG-4 (H.264)
- PAL/SECAM BG/DK/I/L

#### Inputs and outputs:

- Antenna Power Supply 5V/50mA - RF In and Out
- HDMI 1.3 Video Output (1080p)
- SCART Video Output
- USB Port
- Coaxial
- Supported USB formats:
- Video: AVI, TS, TRP, MP4, MKV, MOV
- Audio: MP3, FLAC
- Picture: JPG, JPEG, MPG, MPEG

#### Other:

- USB - Recording, Timeshift, Media Playback
- 7 Days EPG (Electronic Programme Guide)
- Teletext
- TV + Radio Channel List
- Favorite Channel List
- Parental Lock
- Aspect Ratio Handling
- Booking Timer (Up to 8 Events), Sleep Timer
- 16:9/4:3 Format Compatible
- Power Supply: 220-240V~ 50/60Hz
- Power Consumption: Max 7W
- Stand-By Power Consumption: Max 1W
- Dimension: 168 x 36 x 90mm



## ○ SDB 5002T

### SET-TOP-BOX

#### • DIGITAL TERRESTRIAL RECEIVER

• SDB 5002T is a new-generation set-top box ready for future DVB-T2 terrestrial broadcasting with H.265 codec. This model is equipped with an HDMI and SCART connector to connect to any of your televisions, whether it be newer or older model, and LAN connector for connection to the internet and listen to internet radios or check weather forecasts with pre-installed applications. You can play movies, music or photos over the USB interface. You can browse and schedule your favorite shows in the Electronic Program Guide.

#### Signal Reception:

- DVB-T2 - HEVC/H.265 (1080P 60fps)
- DVB-T - MPEG-2/MPEG-4 (H.264)
- PAL/SECAM BG/DK/I/L

#### Inputs and outputs:

- Antenna Power Supply 5V/50mA - RF In and Out
- HDMI 1.3 Video Output (1080p)
- SCART Video Output
- USB Port
- RJ45
- Coaxial

#### Supported USB formats:

- Video: AVI, TS, TRP, MP4, MKV, MOV
- Audio: MP3, FLAC
- Picture: JPG, JPEG, MPG, MPEG



## ○ SDB 550T

### SET-TOP-BOX

#### • DIGITAL TERRESTRIAL RECEIVER

#### Signal Reception:

- DVB-T2 - HEVC/H.265 (1080P 60fps)
- DVB-T - MPEG-2/MPEG-4 (H.264)
- PAL/SECAM BG/DK/I/L

#### Inputs and outputs:

- Antenna Power Supply 5V/50mA - RF In and Out
- HDMI 1.4 Video Output (1080p)
- SCART Video Output
- Mini USB Port
- Coaxial
- IR Port

#### Supported USB Formats:

- Video: AVI, TS, TRP, MP4, MKV, MOV
- Audio: MP3, FLAC
- Picture: JPG, JPEG, MPG, MPEG

#### Other:

- USB - Recording, Timeshift, Media Playback
- 7 Days EPG (Electronic Programme Guide)
- Teletext
- TV + Radio Channel List



## ○ SDB 520T

### SET-TOP-BOX

#### • DIGITAL TERRESTRIAL RECEIVER

• SDB 520T is miniature a new-generation set-top box ready for future DVB-T2 terrestrial broadcasting with H.265 codec. This model is equipped with an HDMI and SCART connector to connect to any of your televisions, whether it be newer or older model. You can play movies, music or photos over the USB interface. You can browse and schedule your favorite shows in the Electronic Program Guide.

#### Signal Reception:

- DVB-T2 - HEVC/H.265 (1080P 60fps)
- DVB-T - MPEG-2/MPEG-4 (H.264)

#### Inputs and outputs:

- Antenna Power Supply 5V/50mA - RF In and Out
- HDMI 1.3 Video Output (1080p)
- SCART Video Output
- USB Port

#### Supported USB formats:

- Video: AVI, TS, TRP, MP4, MKV, MOV
- Audio: MP3, FLAC
- Picture: JPG, JPEG, MPG, MPEG

#### Other:

- USB - Recording, Timeshift, Media Playback
- 7 Days EPG (Electronic Programme Guide)
- Teletext
- TV + Radio Channel List
- Favorite Channel List





# ANTENNAS



## ○ SDA-102 INDOOR DVB-T ANTENNA

- Standard Indoor DVB-T Antenna
- UHF 470 - 790 MHz; VHF 47 - 230 MHz, FM
- Impedance 75 OHM
- HDTV READY
- horizontal polarisation
- in-built low noise amplifier
- gain 20dB
- continuous setting of amplifier performance
- 2 telescopic rods for better VHF and FM reception
- power supply 12V/100mA (220V/12V adapter included)
- subscriber line included
- LED on indicator

DVB-T/T2

LTE

NEW



## ○ SDA-112 INDOOR DVB-T ANTENNA

- Indoor Antenna
- UHF 470-790 MHz VHF 47-230 MHz, FM
- Impedance 75 Ohm
- HDTV READY
- horizontal polarization
- Powerful built-in low noise amplifier
- Gain 20 db
- Infinitely variable power amplifier
- 2 telescopic rods for better reception of VHF and FM
- Power supply 12 V / 100 mA (adapter 230 V / 12 V pack)
- Subscriber cord included
- LED power indicator

DVB-T/T2

LTE

NEW



## ○ SDA-220 INDOOR DVB-T ANTENNA

- Indoor Antenna
- UHF 470-790 MHz VHF 47-230 MHz, FM
- Impedance 75 Ohm
- HDTV READY
- horizontal polarization
- Powerful built-in low noise amplifier
- Gain 20 db
- Infinitely variable power amplifier
- Antenna can be powered by Power supply or Coaxial Cable

DVB-T/T2

LTE



## ○ SDA-302 INDOOR DVB-T ANTENNA

- Stylish Modern Design
- UHF 470 - 790 MHz; VHF 47 - 230 MHz
- Impedance 75Ω
- HDTV READY
- Horizontal and Vertical Polarisation
- Built-in High Performance Low Noise Amplifier
- Gain 20dB
- Power Supply 6V/100mA (230V/6V Adapter Included)
- Set-Top-Box or DTV Power Supply Optional
- Subscriber Line Included
- Power on LED Indicator

DVB-T/T2

LTE

NEW



## ○ SDA-312 INDOOR DVB-T ANTENNA

- Stylish Modern Design
- UHF 470 - 790 MHz
- Impedance 75 Ω
- HDTV READY
- Horizontal Polarisation
- Built-in High Performance Low Noise Amplifier
- Gain 20 dB
- Continuous Setting of Amplifier Performance
- Power Supply 12V/100mA (230V/12V Adapter included)
- Subscriber Line Included
- Power on LED Indicator

DVB-T/T2

LTE

NEW



## ○ SDA-320 INDOOR DVB-T ANTENNA

- Stylish Modern Design
- UHF 470 - 790 MHz
- Impedance 75 Ω
- HDTV READY
- Horizontal Polarisation
- Built-in High Performance Low Noise Amplifier
- Gain 20 dB
- 2 telescopic rods for better reception of VHF and FM
- Antenna can be power by power Supply or with coax. cable

DVB-T/T2

LTE

## ○ SDA-502 OUTDOOR DVB-T ANTENNA

- Outdoor Antenna
- UHF 470 - 790 MHz; VHF 47 - 230 MHz, FM
- Impedance 75Ω
- HDTV READY
- Horizontal and Vertical Polarisation
- Built-in High Performance Low Noise Amplifier
- Gain 20 dB
- Power Supply 6 V/100mA (230V/6V Adapter Included)
- Set-Top-Box or DTV Power Supply Optional
- Waterproof Outdoor Design
- Resistant against UV Radiation
- Connection through an F-Connector (Adapter to IEC Included)
- 2 Installation Options, Balcony/Pole



## ○ SDA-512 OUTDOOR DVB-T ANTENNA

- Outdoor Antenna
- UHF 470 - 790 MHz; VHF 47 - 230 MHz, FM
- Impedance 75 Ω
- HDTV READY
- Horizontal and Vertical Polarisation
- Built-in High Performance Low Noise Amplifier
- Gain 20 dB
- Power Supply 12V/100mA (230V/12V Adapter Included)
- Waterproof Outdoor Design
- Resistant against UV Radiation
- Connection through an F-Connector (Adapter to IEC Included)
- 2 Installation Options, Balcony/Pole



# ANTENNAS



DVB-T/T2

LTE

NEW

## ○ SDA-602 OUTDOOR DVB-T ANTENNA

- Outdoor Antenna
- Frequency Range: UHF470 - 790 MHz
- Impedance 75 OHM
- Received Channels: 21-60
- Gain 9 dB
- Front to Back Ratio: 24 dB
- Resistant and Robust Outdoor Design
- Clever Folding Structure for Easy Installation
- Built-in Symmetrization Element
- Horizontal Polarization
- Number of Elements: 10
- Range: 75 km
- Connection: F-connector



DVB-T/T2

LTE

NEW

## ○ SDA-611 OUTDOOR DVB-T ANTENNA

- Outdoor Antenna
- Frequency range: UHF 470 - 790 MHz
- Impedance 75 Ohm
- Accepted channels: 21-60
- 12 dB gain
- Front to back ratio: 25 dB
- Durable and rugged outdoor
- Built symetrization member
- Number of elements: 42
- Range: 95 km
- Connection via F-connector



DVB-T/T2

LTE

## ○ SDA 612 OUTDOOR DVB-T ANTENNA

- Outdoor Antenna
- Built-in LTE filter
- Frequency Range: UHF 470 - 790MHz
- Reception Channel: CH21-60
- Gain: 10 dB (max.)
- Impedance: 75Ω
- Front-back rate: 25dB
- Elements: 20
- Polarization: Horizontal
- Connector: F-connector
- Range: 80 km



DVB-T/T2

LTE

## ○ SDA 640 OUTDOOR DVB-T ANTENNA

- Outdoor Antenna
- Frequency range: UHF470 - 790 MHz
- Impedance 75 OHM
- Received Channels: 21-60
- Gain 16 dB
- Front to Back Ratio: 25 dB
- Resistant and Robust Outdoor Design
- Built Symmetrization Element
- Horizontal Polarization
- Number of Element: 42
- Range: 120 km
- Antenna is suitable for regions with low signal level
- Connector: F-connector







## ○ SHT B361

### TV HOLDER

- Extensible adjustable mount for TV 40" - 70"
- Min. screen diagonal: 40"
- Max. screen diagonal: 70"
- Tilt upwards: +15°
- Tilt downwards: -15°
- Swivel: +/- 60°
- Level correction: +/-3°
- Min. distance from a wall: 70 mm
- Max. distance from a wall: 460 mm
- Maximum load bearing capacity: 30 kg
- Width: 683 mm
- Height: 430 mm
- Depth: 70 mm
- Minimum span: 100x100 mm



## ○ SHT B360

### TV HOLDER

- Extensible adjustable mount for TV 13" - 55"
- Min. screen diagonal: 13"
- Max. screen diagonal: 550"
- Tilt upwards: +5°
- Tilt downwards: -12°
- Swivel: 180°
- Min. distance from a wall: 75 mm
- Max. distance from a wall: 335 mm
- Maximum load bearing capacity: 20 kg
- Width: 400 mm
- Height: 400 mm
- Depth: 75 - 335 mm



## ○ SHT B332

### TV HOLDER

- Adjustable mount for TV 40" - 70"
- Min. screen diagonal: 40"
- Max. screen diagonal: 70"
- Tilt upwards: 0°
- Tilt downwards: -12°
- Swivel: 0°
- Level correction: +/-3°
- Min. distance from a wall: 30 mm
- Max. distance from a wall: 30 mm
- Maximum load bearing capacity: 40 kg
- Width: 638 mm
- Height: 418 mm



## ○ SHT B331

### TV HOLDER

- Adjustable mount for TV 13" - 40"
- Min. screen diagonal: 13"
- Max. screen diagonal: 40"
- Tilt upwards: 0°
- Tilt downwards: -6°
- Swivel: 0°
- Level correction: +/-3°
- Min. distance from a wall: 29 mm
- Max. distance from a wall: 29 mm
- Maximum load bearing capacity: 15 kg



## ○ SHT B302

### TV HOLDER

- Fixed mount SLIM for TV 40" - 70"
- Min. screen diagonal: 40"
- Max. screen diagonal: 70"
- Tilt upwards: 0°
- Tilt downwards: 0°
- Swivel: 0°
- Level correction: +/-3°
- Min. distance from a wall: 29 mm
- Max. distance from a wall: 29 mm
- Maximum load bearing capacity: 40 kg



## ○ SHT B301

### TV HOLDER

- Fixed mount SLIM for TV 13" - 40"
- Min. screen diagonal: 13"
- Max. screen diagonal: 40"
- Tilt upwards: 0°
- Tilt downwards: 0°
- Swivel: 0°
- Level correction: +/-3°
- Min. distance from a wall: 20 mm
- Max. distance from a wall: 20 mm



## Mobile phones > and tablets

- 17 CLASSIC
- 19 TABLETS
- 20 ACCESSORIES



2.8"  
TFT

240 x 320

Bluetooth  
2.1

1500  
mAh

## ○ ELEMENT P030 MOBILE PHONE

### Display:

- Size: 2.8" TFT
- Resolution: 240 x 320 px

### Chipset:

- CPU: MTK6261D

### Memory:

- RAM: 32MB
- ROM: 32MB
- Micro SDHC Slot (up to 8GB)

### Camera:

- Rear: 0.3 Mpx (VGA)

### Network/Connectivity:

- GSM Dual Band 900/1800MHz
- Bluetooth 2.1

### Features:

- FM Radio
- Torch Light
- Vibration Motor
- Video and Music Player
- Keypad Lock



2.4"  
TFT

240 x 320

Bluetooth  
2.1

1100  
mAh

## ○ ELEMENT P020 MOBILE PHONE

- Display Size: 2.4" (Color TFT LCD)
- Resolution: 240 x 320
- CPU: SC6531DA
- DUAL SIM Standby
- Micro SDHC slot (up to 8GB)
- GSM Dual Band 900/1800MHz
- Message: SMS/MMS
- Multimedia: Video Player, FM Radio
- Rear Camera: VGA
- Earphone Jack 3.5 mm
- Keypad Lock
- Torch Light
- Bluetooth 2.1
- Battery: 1100mAh Li-Ion Battery (300 hours Standby mode)
- Power: 500mAh
- Micro USB 2.0
- Dimensions: 122 x 51.5 x 11.3 mm



2.4"  
TFT

240 x 320

Bluetooth  
2.1

2000  
mAh

## ○ ELEMENT P004 MOBILE PHONE

### Display:

- Size: 2.4" TFT
- Resolution: 240 x 320 px

### Chipset:

- CPU: MTK6261D

### Memory:

- RAM: 32MB
- ROM: 32MB
- Micro SDHC Slot (up to 8GB)

### Camera:

- Rear: 0.08 Mpx (VGA)

### Network/Connectivity:

- GSM Dual Band 900/1800MHz
- Bluetooth 2.1

### Features:

- FM Radio
- Torch Light
- Vibration Motor
- Video and Music Player
- Keypad Lock



1.7"  
TFT

128 x 160

Bluetooth  
2.1

SD  
micro

## ○ ELEMENT P009SE MOBILE PHONE

### Display

- Size: 1.7" TFT
- Resolution: 128 x 160

### Chipset

- CPU: SC6531E

### Memory

- RAM: 32MB
- ROM: 32MB
- Micro SDHC Slot (up to 8GB)

### Camera

- Rear: 0.08Mpx (VGA)

### Network/Connectivity

- GSM Band 850/900/1800/1900MHz
- Bluetooth 2.1

### Features

- Torch
- FM
- Vibration Motor
- Video and Music Player
- Keypad Lock



1.7"  
TFT

127 x 160

Bluetooth  
2.0

SD  
micro

## ○ ELEMENT P010 MOBILE PHONE

### Display

- Size: 1.77" TFT
- Resolution: 160 x 128

### Chipset

- CPU: SC6531

### Memory

- RAM: 32MB
- ROM: 32MB
- Micro SDHC Slot (up to 8GB)

### Camera

- Rear: 0.08Mpx (VGA)

### Network/Connectivity

- GSM Dual Band 900/1800MHz
- Bluetooth 2.1

### Features

- FM
- Vibration Motor
- Video and Music Player
- Keypad Lock
- Others
- Micro USB



2.4"  
TFT

240 x 320

700  
mAh

## ○ ELEMENT P006 MOBILE PHONE

- Senior Mobile Phone

### Display

- Size: 2.4" TFT
- Resolution: 240 x 320

### Chipset

- CPU: MTK6261D

### Memory

- RAM: 32MB
- ROM: 32MB
- Micro SDHC Slot (up to 8GB)

### Camera

- Rear: 0.08Mpx (VGA)

### Network/Connectivity

- GSM Dual Band 850/900/1800/1900MHz

### Features

- FM
- Torch Light
- Vibration Motor
- Video and Music Player, Image Viwer
- Keypad Lock , SOS Emergency Key
- Calendar, Alarm, File Manager, Calculator



1.7"  
TFT

128 x 160

600  
mAh

## ○ ELEMENT P001 MOBILE PHONE

- Display Size: 1.77" (Color TFT LCD)
- Resolution: 128 x 160
- CPU: MTK 6260M
- DUAL SIM Standby
- Micro SDHC slot (up to 16GB)
- GSM Dual Band 850/900/1800/1900MHz
- Message: SMS/MMS
- Multimedia: Video Player, FM Radio
- SOS Emergency Key
- Keypad Lock
- Fast Call Keys
- Torch Light
- Battery: 600mAh Li-Ion Battery (240 hours Standby mode)
- Power: 5V 500mAh
- Micro USB 2.0
- Dimensions: 114 x 51.4 x 13.6 mm
- Accessories: USB Cable, AC Adaptor, Docking and Charging Station, User Manual

**water resistance**



2.2"  
TFT

240 x 320

Bluetooth  
3.0

1000  
mAh

## ○ ELEMENT P007 MOBILE PHONE

### Display

- Size: 2.2" TFT
- Resolution: 240 x 320 Pixels

### Chipset

- CPU: MTK6261D

### Memory

- RAM: 32MB
- ROM: 32MB
- Micro SDHC Slot (up to 8GB)

### Camera

- Rear: 0.3Mpx
- Network/Connectivity
- GSM Dual Band 850/900/1800/1900 MHz
- Bluetooth 3.0

### Features

- IP 68 Protection
- FM
- Torch Light
- Vibration Motor
- Video and Music Player



## ○ SENCOR 10.1Q205

### TABLET

#### Display

- Display Size: 10.1" IPS Technology
- Resolution: HD 1280 x 800 Pixels 16:9
- Gravity sensor

#### Chipset and Memory

- CPU: Rockchip 3326 (Quad Core 1.3Ghz)
- GPU: Mali-400MP2
- RAM Memory: 2GB DDR3
- Flash Memory: 16GB E-NAND
- Micro SDHC slot (up to 64GB)

#### Camera

- Front Camera: 0.3MP
- Rear Camera: 2MP

#### Network/Connectivity

- WiFi: 2.4GHz (802.11 b/g/n)
- Bluetooth: BT 4.0
- Audio-Video Supported Formats
- Video: MPEG-4 H.264/H.263, AVI, MKV, WMV, MOV, MP4, FLV, MPG, etc.
- Audio: MP3, WAV, AAC, AMB, FLAC, etc.
- Picture: JPEG, BMP, GIF, PNG, etc.

#### Others

- OS: Android 9
- Supported Android Applications (via Google Play)
- Jack 3.5mm
- MicroUSB 2.0 (OTG Support / USB Host)
- Battery: 5 000mAh Li-Pol Battery
- Power: 5V 2A
- Dimensions: 254.5 x 153 x 9.3 mm
- Weight: 511g (including battery)

**Accessories:** Micro USB Cable, AC Adaptor



## ○ SENCOR 7Q105

### TABLET

#### Display

- Display Size: 7" IPS Technology
- Resolution: HD 1024 x 600 Pixels 16:9
- Acceleration Sensor, Gravity sensor

#### Chipset and Memory

- CPU: Rockchip 3126 (Quad Core 1.2Ghz)
- GPU: Mali-400MP2
- RAM Memory: 1GB DDR3
- Flash Memory: 16GB E-NAND
- Micro SDHC slot (up to 64GB)

#### Camera

- Front Camera: 0.3MP
- Rear Camera: 2MP

#### Network/Connectivity

- WiFi: 2.4GHz (802.11 b/g/n)
- Bluetooth: BT 4.0
- Audio-Video Supported Formats
- Video: MPEG-4 H.264/H.263, AVI, MKV, WMV, MOV, MP4, FLV, MPG, etc.
- Audio: MP3, WAV, AAC, AMB, FLAC, etc.
- Picture: JPEG, BMP, GIF, PNG, etc.

#### Others

- OS: Android 7.1.2
- Supported Android Applications (via Google Play)
- Jack 3.5mm
- MicroUSB 2.0 (OTG Support / USB Host)
- Battery: 2000mAh Li-Pol Battery
- Power: 5V 1.5A
- Dimensions: 111.2 x 186 x 10 mm
- Weight: 271g (including battery)


**Accessories:** Micro USB Cable, AC Adaptor



- Charger with 2 x USB
- Output DC 5 V/3,1 A (max 15,5 W)
- Suitable for Charging Tablets, MP3 Players, Mobile Phones, Navigation, etc.
- Power: AC 230V , 0,6A, 50Hz
- Dimensions: 47 x 31 x 80 mm
- Weight: 50 g

- Input AC: 230 V, 50Hz, 0,3A;
- Output DC 5 V / 4,2 A (max.);
- Dimensions: 68 x 48 x 48 mm;
- Weight 63 g

- Input AC: 230 V, 50Hz, 0,35A;
- Output DC 5 V / 2,1 A (max.);
- Dimensions: 93 x 42 x 27 mm;
- Weight 37 g



## Home multimedia ➤

- 22 TABLE DVD
- 23 PORTABLE TV
- 24 PORTABLE DVD



## ○ SDV 7407H

### DVD PLAYER

- LED Display
- USB - Playback
- HDMI and SCART output
- Playback Disc Formats: DVD-VIDEO, DVD±R/RW, CD, CD-R/RW
- Video Formats: MPEG-1(VCD), MPEG-2(SVCD, DVD), MPEG-4, XVID, Picture CD
- Audio Formats: MP3
- Dolby Digital 2.0
- 16:9/4:3, PAL/NTSC Compatible
- External Subtitles Support
- Multi-language OSD Menu
- Front USB 2.0 Connection
- Rear Connections: HDMI, SCART, OPTICAL
- Power: 100-240 V ~ 50/60 Hz
- Max. Power Consumption: 8 W /
- Dimension: (WxHxD): 320x33x235 mm
- Weight: 1.08 kg



## ○ SDV 2512H

### DVD PLAYER

- LED Display
- USB - Playback
- HDMI and SCART output
- Playback Disc Formats: DVD-VIDEO, DVD±R/RW, CD, CD-R/RW
- Video Formats: MPEG-1(VCD), MPEG-2(SVCD, DVD), MPEG-4, XVID, Picture CD
- Audio Formats: MP3
- Dolby Digital 2.0
- 16:9/4:3, PAL/NTSC Compatible
- External Subtitles Support
- Multi-language OSD Menu
- Front USB Connection
- Rear Connections: HDMI, SCART, AV Out (CINCH)
- Power: 100-240 V ~ 50/60 Hz
- Max. Power Consumption: 15 W /
- Dimension: (WxHxD): 225x40x200 mm
- Weight: 0,9 kg



## ○ SDV 1204H

### DVD PLAYER

- USB - Playback
- SCART output
- Playback Disc Formats: DVD-VIDEO, DVD±R/RW, CD, CD-R/RW
- Video Formats: MPEG-1(VCD), MPEG-2(SVCD, DVD), MPEG-4, XVID, Picture CD
- Audio Formats: MP3
- Dolby Digital 2.0
- 16:9/4:3, PAL/NTSC Compatible
- External Subtitles Support
- Multi-language OSD Menu
- Front USB Connection
- Rear Connections: SCART
- Power: 100-240 V ~ 50/60 Hz
- Max. Power Consumption: 15 W /
- Dimension: (WxHxD): 225x40x200 mm
- Weight: 0,7 kg







## ○ SPV 7012T PORTABLE TV



### • PORTABLE LCD TV

#### **Display:**

- 10.1" Portable LCD TV
- Resolution: 1024x600 Pixels

#### **Supported Formats:**

- Built-In TV Tuner HD DVB-T2 (HEVC)
- Video: MPEG-4, XviD
- Music: MP3
- Picture: JPEG, BMP

#### **Inputs and Outputs:**

- USB 2.0 Input (Supported up to 32 GB)
- Coaxial
- Audio/Video Output (Jack 3.5mm)
- Headphones Output (Jack 3.5mm)
- HDMI 1.4 Output (for DVB-T2 playback)
- Built-In Stereo Speakers 2x 1.5 W, Dolby Digital

#### **Other:**

- USB (Media Playback, PVR)
- Multi Languag OSD, EPG
- Teletext

#### **Accessories:**

- Power Adapter, Car Charger 12V, Antenna, Remote Control
- Built-in Lithium-Polymer Battery (2200mAh)
- Supply Voltage: 9-12V
- Dimensions: 245x158x27 mm
- Weight: 0.59kg Incl. Battery (Excl. Accessories)



## ○ SPV 7971 DUAL PORTABLE DVD PLAYER

### Display:

- Two 9" TFT LCD Displays
- Resolution: 800x480 Pixels

### Supported Formats:

- DVD±R/RW, CD, CD-R/RW
- MPEG-1 (VCD), MPEG-2 (SVCD, DVD), MPEG-4, XviD
- Picture CD, JPEG, MP3
- Subtitle Support (SUB, SRT, TXT)

### Inputs and Outputs:

- USB Input (Supported up to 32 GB)
- SD Card Slot (Supported up to 32GB)
- Audio/Video Output (Jack 3.5mm)
- Headphones Output (Jack 3.5mm)

### Other:

- Built-In Stereo Speakers, Dolby Digital
- AntiShock Memory
- Multi-Language Menu
- Parental Control
- Built-in Li-Ion Battery 1000mAh

### Accessory:

- Connection Cable, Car Charger, Power Adapter, Remote Control, Instruction Manual
- Power Supply: 9V / 1.5A DC
- Main Unit Size: 224 x 170 x 37 mm
- Monitor Unit Size: 224 x 170 x 21.5 mm



## ○ SPV 7771 DUAL PORTABLE DVD PLAYER

### Display:

- Two 7" TFT LCD Displays
- Resolution: 800x480 Pixels

### Supported Formats:

- DVD±R/RW, CD, CD-R/RW
- MPEG-1 (VCD), MPEG-2 (SVCD, DVD), MPEG-4, XviD
- Picture CD, JPEG, MP3
- Subtitle Support (SUB, SRT, TXT)
- Dolby Digital (AC-3) Decoder

### Inputs and Outputs:

- USB Input (Supported up to 32 GB)
- SD Card Slot (Supported up to 32GB)
- Audio/Video Output (Jack 3.5mm)
- Headphones Output (Jack 3.5mm)
- Built-In Stereo Speakers, Dolby Digital

### Other:

- AntiShock Memory
- Multi-Language Menu
- Parental Control

### Příslušenství:

- propojovací kabel, nabíječka do auta, napájecí adaptér, dálkový ovladač, návod k obsluze

### Accessory:

- Connection Cable, Car Charger, Power Adapter, Remote Control, Battery, Instruction Manual
- Power supply: 9 V / 1.5 A DC
- Main Unit Size: 190 x 145 x 37 mm
- Monitor Unit Size: 190 x 143 x 21.5 mm



## ○ SPV 7926T PORTABLE DVD PLAYER

### Display:

- 9" TFT LCD Rotating Display
- Resolution: 800x480 Pixels

### Supported Formats:

- DVB-T (MPEG4) Tuner
- DVD±R/RW, CD, CD-R/RW
- MPEG-1 (VCD), MPEG-2 (SVCD, DVD), MPEG-4, XviD
- Picture CD, JPEG, MP3
- Subtitle Support (SUB, SRT, TXT)

### Inputs and Outputs:

- USB Input (Supported up to 32 GB)
- SD Card Slot (Supported up to 32GB)
- Audio/Video Output (Jack 3.5mm)
- Headphones Output (Jack 3.5mm)
- HDMI Out

### Other:

- Built-in Li-Ion Battery 1000mAh

### Accessory:

- Antenna, Car Charger, Power Adapter, Remote Control, Instruction Manual, Car Case



## ○ SPV 2920 BLACK PORTABLE DVD PLAYER

- 9" TFT LCD Display with LED Backlight
- Resolution: 800x480 Pixels
- Swivel Screen Design
- Supported Formats: DVD±R/RW, CD, CD-R/RW
- MPEG-1 (VCD), MPEG-2 (SVCD, DVD), MPEG-4, XviD
- Picture CD, JPEG, AC3, MP3
- Subtitle Support (SUB, SRT, TXT)

### Inputs and Outputs:

- USB Input (Supported up to 32 GB)
- Audio/Video Output (Jack 3.5mm)
- Headphones Output
- Built-In Stereo Speakers, Dolby Digital
- AntiShock Memory
- Multi-Language Menu
- Built-in Li-Ion Battery 1000 mAh

### Accessory:

- Power Adapter, Car Charger, Remote Control, Instruction Manual
- Power supply: 9 V / 1 A
- Dimension: 216x40x170 mm
- Weight: 762 g



## ○ SPV 2722 BLACK PORTABLE DVD PLAYER

- Portable DVD player
- 7" TFT LCD Display with LED Backlight
- Resolution: 800x480 Pixels
- Swivel Screen Design
- DVD±R/RW, CD, CD-R/RW
- MPEG-1 (VCD), MPEG-2 (SVCD, DVD), MPEG-4, XviD
- Picture CD, JPEG, AC3, MP3
- Subtitle Support (SUB, SRT, TXT)
- USB Input (Supported up to 32 GB)
- Audio/Video Output (Jack 3.5mm)
- Headphones Output (Jack 3.5mm)
- Built-In Stereo Speakers, Dolby Digital
- AntiShock Memory
- Multi-Language Menu
- Parental Control
- Built-in Li-Ion Battery
- Maximum Playback Time 2h
- Accessory: Power Adapter, Remote Control, Battery, Instruction Manual
- Power supply: 9 V / 1 A





## Audio >

- 27 HOME BLUETOOTH SPEAKERS
- 29 BLUETOOTH SPEAKERS
- 32 AUDIO SYSTEMS
- 33 MICROSYSTEMS
- 34 TURNTABLES
- 35 INTERNET RADIOS
- 36 CD PLAYERS
- 40 PORTABLE RADIOS
- 43 RADIO CLOCKS
- 45 MP3 PLAYERS
- 46 EARPHONES/HEADPHONES

# HOME BLUETOOTH SPEAKERS



## SSS 1300 STEREUS HOME BLUETOOTH REPRODUCER

- Bluetooth Speaker with IPX7
- Unique SSS 1300 STEREUS with RED DOT Design Award is a waterproof speaker that can be split into two stereo speakers via TWS technology. You can enjoy your favourite music from smartphone or tablet via Bluetooth wireless access with connection distance up to 15m. Two speakers with a maximum power of 20W and two passive radiators, will take care of the powerful and clear sound. The speaker is waterproof with IPX7 protection. Don't be afraid to listen to music in adverse weather or next by the pool. You can listen music up to 7 hours with two in-built 1500mAh rechargeable batteries. Unique STEREUS can be the perfect partner for any situation and wherever you go.

### Features

- Unique Design with Two Wireless Speakers in One Body
- Waterproof Speaker with IPX7 Protection
- Premium Fabric Speaker Cover
- TWS Function (True Wireless Stereo)
- LED Status Indicator
- Red Dot Design Award

### Sound:

- Total Power Output 20W
- 2 Bass & Mid-Range Speakers + 2 Passive Radiators
- Frequency Response: 68Hz - 20KHz
- Total Harmonic Distortion: ≤1%

### Inputs:

- Bluetooth Audio 4.2
- Connection Distance up to 15m



## SSS 6800 SIRIUS MAXI HOME BLUETOOTH REPRODUCER

- Bluetooth Speaker with IPX6
- Revolutionary SSS 6800 SIRIUS MAXI is a compact waterproof speaker dynamic a huge surround sound. You can enjoy your favourite music from smartphone or tablet via Bluetooth wireless access with connection distance up to 15m. Four speakers with a maximum power of 60W and two passive radiators, will take care of the powerful and clear sound. The speaker is equipped with TWS technology, which allows connect two speakers together and is waterproof with IPX6 protection. Don't be afraid to listen to music in adverse weather or next by the pool. You can listen music up to 8 hours with a large in-built 10 000mAh rechargeable battery. Unique SIRIUS MAXI can be the perfect partner for any situation and wherever you go.

### Features

- Waterproof Speaker with IPX6 Protection
- Premium Fabric Speaker Cover
- TWS Function (True Wireless Stereo)
- LED Status Indicator (Connection/Battery Status)
- Powerbank Function

### Sound:

- Maximum Speaker Power 60W
- Total Power Output (RMS) 50W
- 4 Speakers (2 Bass & Mid-Range, 2 Tweeters) + 2 Passive Radiators
- Digital Sound Processor DSP
- Frequency Response: 80Hz - 16KHz
- Total Harmonic Distortion: ≤1%



## SSS 3700 PORTABLE PARTY SPEAKER

- Speaker SSS 3800 sounds small or bigger party according your ideas. With a built-in 4000mAh rechargeable battery can play music up to 10 hours at medium volume level. Two stereo mid-range and two treble speakers with a maximum power of 60W take care of the quality sound. You can enjoy your favorite music via Bluetooth wireless access with range up to 20 meters, USB stick, harddrive or another device with a 3.5mm Jack connector. Speakers are illuminated by LED lights in 7 colors and 5 flashing modes for bringing right party atmosphere. The package includes wire microphone.

- Power: 50W
- Trolley Portable System
- LED Display
- Flashing LED Lights
- TWS Function (True Wireless Stereo)

### Sound:

- Power Output: 50W
- 2 Speakers (1 Bass & Mid-Range, 1 Tweeter)
- Frequency Response: 20Hz-17KHz
- Total Harmonic Distortion: ≤10% (1KHz)
- Equalizer Modes (ROCK, POP, JAZZ, ...)
- SUPER BASS Button

### Light:

- Color Light Show
- 7 Flashing Modes

### Reception:

- FM PLL Radio (87.5 - 108 MHz)
- Station Presets: 30 FM



## SSS 3600 KIDS KIDS BLUETOOTH SPEAKER WITH MICROPHONE

- Kids Party Speaker
- Karaoke with Recording Function
- Flashing Multicolor LED Lights
- Built-in Rechargeable Battery

### Sound:

- Power Output: 70W (Impedance: 4Ω)
- Frequency Response: 40Hz - 16KHz
- Total Harmonic Distortion: ≤1%
- 3 Speakers (2 Mid-Range + 1 Treble)
- Equalizer (6 Presets)

### Inputs:

- Bluetooth Audio 5.0
- Connection Distance up to 15m
- Audio Aux Input (3.5mm Jack)
- USB Input
- MicroSDHC Card Slot
- Microphone Input (6.3mm Jack)
- Guitar Input (6.3mm Jack)

### Others:

- FM PLL Radio
- LED Display
- Karaoke with ECHO Function and Volume Adjustment
- Built-in battery: 3000mAh Li-Ion
- Battery Playback Time up to 10 Hours (50% Volume Level)
- Charging 9V (LED Indication) or 12V







## ○ SSS 6600N HOME BLUETOOTH REPRODUCER

- Brushed Aluminium Stand and Premium Fabric Speaker Cover
- NFC Easy Connection
- Digital Sound Processor DSP

### Sound:

- Power Output: 70W (Impedance: 4 Mid-range, 6 Subwoofer)
- Frequency Response: 50Hz - 20KHz
- Total Harmonic Distortion: 1%
- 3 Speaker (2 Mid-Range + 1 Subwoofer)

### Inputs:

- Bluetooth Audio 4.0
- CSR Bluetooth Chip (For Cleaner, More Stable and Better Sound Transmission)
- Connection Distance up to 15m
- Audio Aux Input (3.5mm stereo Jack)
- USB Input for Playback

### Others:

- LED Status Indicator
- Support Hands-free Calling
- USB Charging for Mobile Devices (1A)

### Accessories:

- Remote Control (Battery Included CR2032), 3.5mm Aux Cable, User Manual
- Power Supply: AC 100-240V-50/60 Hz
- Standby Consumption: 0.5W
- Dimension: 539 x 170 x 219mm
- Weight: 3800g



## ○ SSS 6501 AULUS HOME BLUETOOTH REPRODUCER

- Powerfull Bluetooth Speaker with Elegant Design
- Digital Sound Processor DSP

### Sound:

- Power Output: 50W (Impedance: mid 4Ω, treble 8Ω)
- Frequency Response: 50Hz - 25KHz
- Total Harmonic Distortion: ≤1%
- 4 Speakers (2 Mid-Range + 2 Treble)

### Inputs:

- Bluetooth Audio 4.2
- Connection Distance up to 15m
- Audio Aux Input (3.5mm stereo Jack)
- USB Input for Playback

### Others:

- Handsfree Function
- LED Status Indicator

### Accessories:

- Charging Adaptor, 3.5mm Aux Cable, User Manual
- Power Supply: DC 15 V/2.5 A
- Standby Consumption: ≤0.5W
- Dimension: 340 x 99 x 152mm
- Weight: 1,8Kg



## ○ SSS 5100 DOMUS HOME BLUETOOTH REPRODUCER

- Design for Most Effective 360° Sound Performance
- Slide-Touch Volume Control
- Digital Sound Processor DSP
- TWS Function (True Wireless Stereo)

### Sound:

- Power Output: 10W (Impedance: 3Ω)
- Frequency Response: 20Hz - 17KHz
- Total Harmonic Distortion: ≤1%

### Inputs:

- Bluetooth Audio 4.0
- Action Bluetooth Chip (For Cleaner and More Stable Transmission)
- Connection Distance up to 15m
- Audio Aux Input (3.5mm stereo Jack)
- Micro SD Card Playback (up to 64GB)

### Others:

- LED Status Indicator
- Support Hands-free Calling
- Built-in Rechargeable Battery: 2000mAh Li-Ion
- Playback Time up to 12 Hours
- Micro USB Charging
- Charging Time max 3 Hours

### Accessories:

- Adaptor 5V 1A, 3.5mm Aux Cable, User Manual
- Dimension: 100 x 100 x 150mm
- Weight: 630g



## ○ SSS 2600 HOME BLUETOOTH REPRODUCER

- Tower Speaker with Bluetooth
- Maximum Power 60W
- Rich and Powerful Sound
- Holder for Smartphone or Tablet

### Sound:

- Power Output: 15W x 2 (Impedance: 3#) + 30W (Impedance: 6#)
- 2 Treble Speakers + 1 Bass
- Frequency Response: 80 Hz - 17 kHz
- Total Harmonic Distortion: L/R #5% (1 kHz), Bass #10% (65 Hz)
- Equalizer Modes: FLAT/ROCK/POP/JAZZ/CLASSIC

### Display:

- LED Display
- Orange Color

### Reception:

- FM PLL Radio 87.5 MHz - 108MHz
- Station Presets: 40 (FM)

### Inputs:

- Bluetooth - Wireless Audio Streaming
- USB Playback
- SD Card Slot
- Line In (3.5mm Stereo Jack)
- Rear Aux Input (Audio Cinch L/R)

### Others:

- USB Charging

**Accessories:** IR Remote Controller, Battery, Manual



- **SSS 6400N SIRIUS BLACK**
- **SSS 6400N SIRIUS BLUE**
- **SSS 6400N SIRIUS RED**
- **SSS 6400N SIRIUS PINK**

## BLUETOOTH REPRODUCITOR



- Bluetooth Speaker with IPX6
- Revolutionary SSS 6400N is a compact waterproof speaker with 360° surround sound. You can enjoy your favourite music from smartphone or tablet via Bluetooth wireless access with connection distance up to 15m. Two speakers with a maximum power of 30W and two passive radiators, will take care of the powerful and clear sound. The speaker is equipped with NFC technology, which allows easy and quick connection with your smartphone and TWS technology, which allows connect two speakers together. The speaker is waterproof with IPX6 protection. Don't be afraid to listen to music in adverse weather or next by the pool. You can listen music up to 7 hours with a large in-built 4000mAh rechargeable battery. Unique SSS 6400N can be the perfect partner for any situation and wherever you go.

### Features

- Waterproof Speaker with IPX6 Protection
- Premium Fabric Speaker Cover
- NFC Easy Connection
- TWS Function (True Wireless Stereo)
- LED Status Indicator

### Sound:

- Maximum Speaker Power 30W (Impedance: 4Ω)
- Total Power Output (RMS) 25W
- 2 Speakers + 2 Passive Radiators
- Digital Sound Processor DSP
- Frequency Response: 80Hz - 16KHz
- Total Harmonic Distortion: ≤1%

### Inputs:

- Bluetooth Audio 4.2
- Connection Distance up to 15m
- Audio Aux Input (3.5mm stereo Jack)

### Others:

- Textile Strap for Easy Handle
- Handsfree Function
- Built-in Rechargeable Battery: 4000mAh Li-Ion
- Playback Time up to 7 Hours
- Micro USB Charging
- Charging Time max 3 Hours

### Accessories:

- USB Charging Cable, 3.5mm Aux Cable, User Manual
- Dimension: 187 x 78 x 78mm
- Weight: 620g



# BLUETOOTH SPEAKERS

## ● SSS 6100N SIRIUS MINI BLACK

## ● SSS 6100N SIRIUS MINI BLUE

## ● SSS 6100N SIRIUS MINI RED

### BLUETOOTH REPRODUCER

#### Features

- Waterproof Speaker with IPX6 Protection
- Premium Fabric Speaker Cover
- NFC Easy Connection
- TWS Function (True Wireless Stereo)
- LED Status Indicator

#### Sound:

- 360° Surround Sound
- Maximum Speaker Power 16W (2x8W, Impedance: 4Ω)
- Total Power Output (RMS) 12W
- 2 Speakers + 2 Passive Radiators
- Digital Sound Processor DSP
- Frequency Response: 80Hz - 16KHz
- Total Harmonic Distortion: ≤1%
- Signal-to-Noise Ratio: >60dB

#### Inputs:

- Bluetooth Audio 4.2
- Connection Distance up to 15m



## ○ SSS 6200N BLACK

### BLUETOOTH REPRODUCER

- Aluminium Body with Premium Fabric Speaker Cover
- NFC Easy Connection
- Digital Sound Processor DSP
- Winner of the Reddot Design Award 2016

#### Sound:

- Power Output: 20W (Impedance: 4ohm)
- Frequency Response: 120Hz - 18KHz
- Total Harmonic Distortion: 1%
- 2 Speakers + 2 Passive Radiators

#### Inputs:

- Bluetooth Audio 4.1
- Connection Distance up to 15m
- Audio Aux Input (3.5mm stereo Jack)

#### Others:

- Amplifier class D (for rich sound with minimum energy consumption)
- Handsfree Function
- Built-in battery: 5000mAh Li-Ion
- Playback Time up to 8 Hours
- Micro USB Charging
- Charging Time max 5 Hours



## ○ SSS 1200N TARUS

### BLUETOOTH REPRODUCER

#### Features

- Waterproof Speaker with IPX4 Protection
- Premium Fabric Speaker Cover
- NFC Easy Connection
- TWS Function (True Wireless Stereo)

#### Sound:

- Total Power Output 20W
- 2 Speakers + 1 Passive Radiator
- Digital Sound Processor DSP
- Frequency Response: 80Hz - 16KHz
- Total Harmonic Distortion: ≤1%

#### Inputs:

- Bluetooth Audio 4.2
- Connection Distance up to 15m
- Audio Aux Input (3.5mm stereo Jack)

#### Others:

- Hands-free Function
- Built-in Rechargeable Battery: 4000mAh Li-Ion
- Playback Time up to 6 Hours in Maximum Volume Level
- Micro USB Charging
- Charging Time max 3 Hours





### ● SSS 1100 GREEN

### ● SSS 1100 BLUE

### ● SSS 1100 RED

### ● SSS 1100 BLACK

## BLUETOOTH REPRODUCUTOR

- Splash Proof Construction with IPX5
- Amplifier class D (for rich sound with minimum energy consumption)
- Built-in rechargeable battery

#### Sound:

- Power Output: 10W (Impedance: 4#)
- Frequency Response: 150Hz - 18KHz
- Total Harmonic Distortion: #1%
- 2 Speakers + 1 Passive Radiator

#### Inputs:

- Bluetooth Audio 4.1
- Connection Distance up to 15m
- Audio Aux Input (3.5mm stereo Jack)

#### Others:

- 1/4" Screw-thread for Attaching
- Handsfree Function
- Built-in battery: 2000mAh Li-Ion
- Playback Time up to 13 Hours
- Micro USB Charging
- Charging Time max 5 Hours
- **Accessories:** USB Charging Cable, 3.5mm Aux Cable, User Manual
- Dimension: 173 x 73 x 49mm
- Weight: 430g

10W

IPX5



2000  
mAh

## BLUETOOTH SPEAKERS



### ● SSS 1050 GREEN

### ● SSS 1050 RED

### ● SSS 1050 BLUE

### ● SSS 1050 BLACK

## BLUETOOTH REPRODUCUTOR

- Splash Proof Construction with IPX5
- Amplifier class D (for rich sound with minimum energy consumption)
- Built-in rechargeable battery

#### Sound:

- Power Output: 5W (Impedance: 4#)
- Frequency Response: 180Hz - 18KHz
- Total Harmonic Distortion: #1%
- 1 Speaker + 1 Passive Radiator

#### Inputs:

- Bluetooth Audio 4.1
- Connection Distance up to 15m
- Audio Aux Input (3.5mm stereo Jack)

#### Others:

- 1/4" Screw-thread for Attaching
- Handsfree Function
- Built-in battery: 1500mAh Li-Ion
- Playback Time up to 13 Hours
- Micro USB Charging
- Charging Time max 4 Hours
- **Accessories:** USB Charging Cable, 3.5mm Aux Cable, User Manual
- Dimension: 98 x 90 x 50mm
- Weight: 300g

5W

IPX5



1500  
mAh



### ○ SSS 101

## BLUETOOTH REPRODUCUTOR

- LED Display
- Lightweight and Compact Design
- Amplifier class D (for rich sound and optimum performance with minimum energy consumption)
- Built-in rechargeable battery

#### Sound:

- Power Output: 2 x 5W (Impedance: 4Ω)
- Frequency Response: 65Hz - 18KHz
- Total Harmonic Distortion: ≤0.5% (1kHz 1W)
- 2 Speakers (Stereo) + 2 Passive Radiators

#### Inputs:

- Bluetooth Audio 2.0
- FM PLL Radio
- Audio Aux Input (3.5mm stereo Jack)
- Micro SD (supported up to 32GB)
- USB

#### Others:

- Built-in battery: 2000mAh Li-Ion
- USB Charging (5V / min. 500mA)
- Dimension: 241 x 138 x 72mm
- Weight: 0.9kg

2x5W

FM

LED  
display



### ○ SSS 81

## BLUETOOTH REPRODUCUTOR

- LED Display
- Small Size with Power Sound
- Amplifier Class D (for rich sound and optimum performance with minimum energy consumption)
- Built-in Rechargeable Battery

#### Sound:

- Power Output: 2 x 5W (Impedance: 4Ω)
- Frequency Response: 65Hz - 18.5KHz
- Total Harmonic Distortion: ≤0.5% (1kHz 1W)
- 2 Speakers (Stereo) + 2 Passive Radiators

#### Inputs:

- Bluetooth Audio 2.0
- FM PLL Radio
- Audio Aux Input (3.5mm Stereo Jack)
- Micro SD (Supported up to 32GB)
- USB

#### Others:

- Alarm
- Built-in Battery: 2000 mAh Li-Ion
- USB Charging Slot (5V / min 500 mA)
- Dimension: 223 x 70 x 71mm
- Weight: 0.7kg

2x5W

FM

LED  
display





# AUDIO SYSTEMS



## ○ SSS 4200 AUDIO SYSTEM

- Power Sound System
- Power: 800W
- LED Display
- DJ Effects
- Flashing LED Light (Speakers, Floor, Wall)
- Sound:**
  - Power Output: 800W (Impedance: 6Ω)
  - 2 Bass + 2 Treble Speakers
  - Frequency Response: 50Hz - 20KHz
  - Total Harmonic Distortion: ≤10%
  - Equalizer Modes (Pop, Balance, Funk, Rock, Jazz, Samba)
  - BASS Boost Button
  - DJ Effects (7 DJ effects + 3 Auto DJ modes)
- Light:**
  - 7 Colors (Red, Green, Blue, Yellow, Cyan, Purple, White)
  - 7 Flashing Modes with Possibility Turn Off Lights
- Reception:**
  - FM PLL Radio
  - Station Presets: 30 FM
- Inputs:**
  - Bluetooth Audio 4.2
  - Audio Aux (3.5mm Stereo Jack)
  - 2x USB (1x Playback and 1x Charging)
  - 2x Microphone Port (Jack 6.3mm)
  - Guitar Input




## ○ SSS 4001 AUDIO SYSTEM

- Power Sound System
- Power: 400W
- LED Display
- Flashing LED Backlight
- Sound:**
  - Power Output: 400W (Impedance: 6Ω)
  - 2 Bass + 2 Treble Speakers
  - Frequency Response: 40Hz - 16KHz
  - Total Harmonic Distortion: ≤10% (1KHz 1W)
  - 5 Band Graphic Equalizer
  - Equalizer Modes (Pop, Funk, Rock, Jazz, Samba)
  - BASS Boost Button
- Light:**
  - 7 Colors (Blue, Green, Red, Yellow, Purple, Turquoise, White)
  - 5 Flashing Modes with Possibility Turn Off Lights
- Reception:**
  - FM PLL Radio
  - Station Presets: 50 FM
- Inputs:**
  - Bluetooth Audio 2.1
  - Audio Aux (3.5mm Stereo Jack)
  - SD Card Slot (Supported up to 32GB)
  - 2x USB (Playback and Charging)
  - 2x Microphone Port (Jack 6.3mm)



## ○ SSS 3800 AUDIO SYSTEM

- Power: 60W
- LCD Display
- Flashing LED Lights
- Sound:**
  - Power Output: 60W (Impedance: 3Ω for Mid-Range Speakers)
  - 4 Speakers (2 Mid-Range + 2 Treble)
  - Frequency Response: 40Hz-15KHz
  - Total Harmonic Distortion: ≤10% (1KHz)
  - Equalizer Modes (FLAT, CLASSIC, ROCK, POP, JAZZ)
  - SUPER BASS Button
- Light:**
  - 7 Colors Light Show
  - 5 Flashing Modes
- Reception:**
  - FM PLL Radio
  - Station Presets: 30 FM
- Inputs:**
  - Bluetooth Audio 2.1
  - Audio Aux (3.5mm Stereo Jack)
  - 2x USB (Playback)
  - 2x Microphone Port (Jack 6.3mm)
- Others:**
  - In-built Rechargeable Battery 4000mAh
  - Karaoke (Echo, Volume)
- **Accessories:** Wired Microphone, User Manual



## ○ SSS 3200 KIDS AUDIO SYSTEM

- Brushed Aluminium Top Panel and Premium Fabric Speaker Cover
- NFC Easy Connection
- Digital Sound Processor DSP
- Sound:**
  - Power Output: 60W (Impedance: 40hm)
  - Frequency Response: 50Hz - 20KHz
  - Total Harmonic Distortion: 1%
  - 3 Speaker (2 Mid-Range + 1 Subwoofer)
- Inputs:**
  - Bluetooth Audio 2.1
  - Connection Distance up to 15m
  - Audio Aux Input (3.5mm stereo Jack)
  - USB Input for Playback
- Others:**
  - LED Status Indicator
  - USB Charging for Mobile Devices (1A)
- Accessories:**
  - Remote Control (Battery Included CR2032), 3.5mm Aux Cable, User Manual
  - Power Supply: AC 100-240V~50/60 Hz
  - Standby Consumption: 0.5W
  - Dimension: 398 x 226 x 139mm
  - Weight: 3000g





100W

USB

FM

NEW

LCD

## ○ SMC 8000B MICROSYSTEM

- Power: 100W
- LCD Display
- Flashing Speaker Backlight
- Powerful and Rich Sound

### Sound:

- Power Output: 100W (Impedance: 6Ω)
- 2 Bass + 2 Treble Speakers
- Frequency Response: 40Hz - 16KHz
- Total Harmonic Distortion: ≤10%
- Equalizer Modes: ROCK/FLAT/POP/CLASSIC/JAZZ
- BASS BOOST Button

### Light:

- 3 Colors (Blue, Red, Purple)
- 4 Flashing Modes with Possibility Turn Off Lights

### Reception:

- FM PLL Radio 87.5 MHz - 108MHz
- Station Presets: 30 FM

### Inputs:

- CD Playback CD/MP3/CD-R/CD-RW
- Bluetooth Audio 2.1
- Audio Aux (3.5mm Stereo Jack)



30W

LED display

Bluetooth

USB

## ○ SMC 4300BR MICROSYSTEM

- Maximum Power 30W
- Powerful and Rich Sound
- Premium Aluminium Design
- CD Playback CD/MP3/CD-R/CD-RW

### Sound:

- Power Output: 15W x 2 (Impedance: 4Ω)
- 2 Speakers
- Frequency Response: 84 Hz - 16 kHz
- Total Harmonic Distortion: L/R ≤5% (1kHz)
- Equalizer Modes: FLAT/ROCK/POP/JAZZ/CLASSIC

### Display:

- LED Display
- Orange Color

### Reception:

- FM PLL Radio 87.5 MHz - 108MHz
- Radio Data System (RDS)
- Station Presets: 40 (FM)

### Inputs:

- Bluetooth - Wireless Audio Streaming
- USB Playback
- Line In (3.5mm Stereo Jack)



12W

LED display

Bluetooth

USB

## ○ SMC 4120B MICROSYSTEM

- Maximum Power 12W
- Powerful and Rich Sound
- Premium Aluminium Design
- CD Playback CD/MP3/CD-R/CD-RW

### Sound:

- Power Output: 6W x 2 (Impedance: 6Ω)
- 2 Speakers
- Frequency Response: 84 Hz - 18 kHz
- Total Harmonic Distortion: L/R ≤5% (1kHz)
- Equalizer Modes: FLAT/ROCK/POP/JAZZ/CLASSIC

### Display:

- LED Display
- Orange Color

### Reception:

- FM PLL Radio 87.5 MHz - 108MHz
- Station Presets: 40 (FM)

### Inputs:

- Bluetooth - Wireless Audio Streaming
- USB Playback
- Line In (3.5mm Stereo Jack)

### Others:

- Sleep Function
- USB Charging



10W

LED display

Bluetooth

USB

## ○ SMC 2100B MICROSYSTEM

- Maximum Power 10W
- Premium Radiator Speakers
- CD Playback CD/MP3/CD-R/CD-RW

### Sound:

- Power Output: 5W x 2 (Impedance: 8Ω)
- 2 Speakers
- Frequency Response: 118 Hz - 16 kHz
- Total Harmonic Distortion: L/R ≤5% (1 kHz)
- Equalizer Modes: Flat, Classic, Pop, Rock, Jazz

### Display:

- LED Display
- Orange Color

### Reception:

- FM PLL Radio 87.5 MHz - 108MHz
- Station Presets: 40 (FM)

### Inputs:

- Bluetooth - Wireless Audio Streaming
- USB Playback
- Line In (3.5mm Stereo Jack)

### Others:

- Sleep Function
- Accessories: IR Remote Controller, Battery, Manual

# TURNTABLES



## ○ STT 500URA TURNTABLE

- Audiotechnica Dynamic Cartridge (MM) with Pre-amplifier
- Auto-Stop and Auto-Arm-Return
- Turntable Pitch Control
- Aluminium Turntable Platter

### Motor

- Dual Speed 33/45 RPM
- Belt Drive System
- DC Servo Motor

### Connectivity

- Line Output (Cinch L/R)
- USB Type-B Output (for Recording to PC)

### Others

#### Accessories:

- USB Cable, Rubber Pad, MM Cartridge, 45 RPM Adaptor, Audacity CD Software, External Power Adaptor, Instruction Manual
- Power Consumption: 230V~ 50Hz, max. 3W
- Dimension: 450 x 355 x 121mm
- Weight: 6.5kg



## ○ STT 211U TURNTABLE

- Turntable with Autostop Function
- Triple Speed 33/45/78 RPM
- PLL Digital FM/AM Tuner (30 Presets for FM, 20 Presets for AM)
- Automatic Searching
- USB/SD Slot
- Direct Encoding to USB/SD from LP Disc, Radio and External Sources
- MP3 Compatible
- Line Output (Cinch L/R)
- Integrated Stereo Speakers (2x 5W RMS)

### Accessories:

- Remote Control, Instruction Manual
- Power Consumption: 12W / #1W Standby Mode
- Dimension: 305x288x118mm
- Weight: 1.9kg



## ○ STT 019U TURNTABLE

- Stereo RETRO Turntable
- Triple Speed 33/45/78 RPM
- CD/MP3 Player
- FM/AM Radio Tuner
- Manual Searching
- USB Playback and Encoding
- Direct Encoding to USB from LP Disc and CD
- MP3/WMA Compatible
- Integrated Stereo Speakers (2x 2W RMS)

### Accessories:

- Wooden Stand, Remote Control, Instruction Manual
- Power: AC 230V 50Hz
- Power Consumption: 19W
- Dimension (HxWxD): 695x500x330 mm
- Weight: 9.1 kg



## ○ STT 016 TURNTABLE

- Retro Turntable with Autostop Function
- USB Slot, CD/MP3 player and Cassette Deck
- Triple Speed 33/45/78 RPM
- CD/MP3 Player
- Cassette Deck
- FM/AM Tuner
- USB slot
- Direct Encoding to USB from LP Disc, CD, FM/AM Tuner and Cassette Deck
- MP3/WMA Compatible
- Line Input (Chinch L/R)
- Integrated Stereo Speakers (2x 3W RMS)

### Accessories:

- Remote Control, Instruction Manual
- Power Consumption : 19W
- Dimension: 500 x 340 x 210 mm
- Weight: 7.8kg





## ○ SIR 5000WDB INTERNET RADIO

- WiFi Internet Radio
- Easy Operation with Unique Control Button
- More than 26 000 Internet Radio Stations
- AirMusic Control App (iOS/Android)

### **Internet Radio:**

- Easy Connection via Wifi
- Local Station Search by Auto/Country/City
- Favorite Station List
- Station Presets: 250 (Internet)
- Manage Radio Station via MediaU Website

### **Sound:**

- Power Output: 6W (Impedance: 4Ω)
- Frequency Response: 84 Hz - 16kHz
- Total Harmonic Distortion: L/R ≤5% (1kHz)
- 8 Equalizer Modes

### **Display:**

- 2.4" Full Color LCD Display
- Dimmer

### **Reception:**

- DAB+ Tuner (Digital Audio Broadcasting)
- FM PLL Radio Tuner
- Radio Data System (RDS)
- Station Presets: 20 (FM)

### **Inputs:**

- Bluetooth - Wireless Audio Streaming
- Line In (3.5mm Stereo Jack)

### **Others:**

- Weather Forecast for 5000 cities
- Support UPnP/DLNA
- Time, Alarm, Sleeper
- Headphones Output (3.5mm Stereo Jack)

### **Accessories:**

- IR Remote Controller, Battery, Adaptor, 3.5mm Aux Jack, Manual
- Power Supply: Adaptor 9V, 1.5A
- Consumption: Max. 16W
- Energy Efficiency: 3W
- Dimension (Main Unit): 220 x 110 x 110mm
- Weight: 1.1kg

# CD PLAYERS



## ○ SPT 5800

### CD PLAYER

- Boombox with CD, BT, MP3, USB, AUX and FM Radio
- Output Power: 25 W RMS (2 x 12.5 W)
- Two Active 4 Ohm Speakers 4"
- Two Passive Speakers to Increase the Bass Sound Effect
- Disco LED Light Mode (7 Colors) with Flashing Modes Selection
- Equalizer Function (Rock, Pop, Jazz, Flat, Classic)
- Rubberized Surface
- Remote Control
- CD-R / RW, Bluetooth, MP3 and USB Compatible
- Programmable Playback with 20 Track Memory for CD and 99 Track Memory for MP3
- Bluetooth V2.1 + EDR
- USB Interface
- AUX-IN Jack 3.5 mm
- AUX-OUT Jack 3.5 mm (Headphones)
- Stereo FM Receiver 87.5 - 108 MHz
- Digital Tuning and Frequency Display
- Preset Memory - 30 Channels in FM Band
- Telescopic FM Antenna
- FM Stereo Indicator on Display



## ○ SPT 5280

### CD PLAYER

- Boombox with CD, BT, MP3, USB, AUX and FM Radio
- Output Power: 16 W RMS (2 x 8 W)
- 4 Speakers (2 x Wideband Speaker + 2 x Treble)
- Equalizer Function (Rock, Pop, Jazz, Flat, Classic)
- CD-R / RW, Bluetooth, MP3 and USB Compatible
- Programmable Playback with 20 Track Memory for CD and 99 Track Memory for MP3
- Bluetooth V3.0
- USB Interface
- AUX-IN Jack 3.5 mm
- AUX-OUT Jack 3.5 mm (Headphones)
- Stereo FM Receiver 87.5 - 108 MHz
- Digital Tuning and Frequency Display
- Preset Memory - 20 Channels in FM Band
- Clock
- Sleep Timer
- Waking Up with Music (Radio / CD / USB)
- Remote Control
- Telescopic FM Antenna
- FM Stereo Indicator
- LCD Display with Backlight, ID3 Tag



## ○ SPT 4700

### CD PLAYER

- Boombox with CD, BT, MP3, SD, USB, AUX and FM Radio
- Output Power: 12 W RMS (2 x 6 W)
- Equalizer Function (Rock, Pop, Jazz, Classic)
- CD-R / RW, Bluetooth, MP3, SD and USB Compatible
- Programmable Playback with 20 Track Memory for CD and 99 Track Memory for MP3
- Bluetooth V4.0
- USB Interface
- AUX-IN Jack 3.5 mm
- AUX-OUT Jack 3.5 mm (Headphones)
- Stereo FM Receiver 87.5 - 108 MHz
- Digital Tuning and Frequency Display
- Preset Memory - 40 Channels in FM Band
- Clock
- Sleep Timer
- Waking Up with Buzzer or Music (Radio / CD / USB)
- Remote Control
- Telescopic FM Antenna
- FM Stereo Indicator
- LCD Display
- Power: AC 100-240 V, 50/60 Hz or 8 x 1.5 V Battery Type D / LR20 (Not Included)







## ● SPT 3907 BLACK

## ○ SPT 3907 WHITE

### CD PLAYER

- Cassette Player with CD, BT, MP3, USB, AUX and FM Radio
- Output Power: 4 W RMS (2 x 2 W)
- CD-R / RW, Bluetooth, MP3, and USB Compatible
- Programmable Playback with 20 Track Memory for CD and 99 Track Memory for MP3
- Bluetooth V2.1 + EDR
- USB Interface
- AUX-IN Jack 3.5 mm
- AUX-OUT Jack 3.5 mm (Headphones)
- Stereo FM Receiver 87.5 - 108 MHz
- Digital Tuning and Frequency Display
- Preset Memory - 30 Channels in FM Band
- Repeat and Random Playback Function
- Remote Control
- Telescopic FM Antenna
- FM Stereo Indicator
- LCD Display with Backlight
- Power: AC 100-240 V ~ 50/60 Hz or 6 x 1.5 V Battery Type D / LR20 (Not Included)
- Consumption: 14 W
- Dimensions: (w / h / d) 280 x 140 x 210 mm
- Weight: 1,7 kg



## ○ SPT 3800

### CD PLAYER

- Portable CD Player with BT, MP3, USB, AUX and FM Radio
- Output Power: 4 W RMS (2 x 2 W)
- Remote Control
- CD-R / RW, Bluetooth, MP3 and USB Compatible
- Programmable Playback with 20 Track Memory for CD and 99 Track Memory for MP3
- Bluetooth V2.1
- USB Interface
- AUX-IN Jack 3.5 mm
- Stereo FM Receiver 87.0 - 108 MHz
- Digital Tuning and Frequency Display
- Telescopic FM Antenna
- FM Stereo Indicator
- Clock
- Negative Display with White Digits
- Power: AC 230 V / 50 Hz or 8 x 1.5 V Battery Type C / LR14 (Not Included)





# CD PLAYERS



## ○ SPT 3310

### CD PLAYER

- Portable CD Player with BT, MP3, USB, AUX and FM Radio
- Output Power: 4 W RMS (2 x 2 W)
- CD-R / RW, Bluetooth, MP3 and USB Compatible
- Programmable Playback with 20 Track Memory for CD and 99 Track Memory for MP3
- Bluetooth V2.1
- USB Interface
- AUX-IN Jack 3.5 mm
- Stereo FM Receiver 87.0 - 108 MHz
- Digital Tuning and Frequency Display
- Telescopic FM Antenna
- FM Stereo Indicator
- Clock
- LCD Display with Backlight
- Power: AC 230 V / 50 Hz or 8 x 1.5 V Battery Type C / LR14 (Not Included)
- Consumption: 15 W
- Dimensions: (w / h / d) 301 x 140 x 218 mm
- Weight: 1.97 kg



## ● SPT 3228 B

## ● SPT 3228 WG

### CD PLAYER

- Portable Radio Receiver with CD/MP3/BT/USB Player
- CD / CDR / CDRW / MP3 / BT / USB / SD Compatible
- Programmable CD Playback with 20 Track Memory and 100 Track for USB/SD
- Search, Play/Pause, Skip, Repeat One/All Function
- USB Connector for Connecting Memory Stick (Max. 32 GB)
- AM / FM Stereo Analogue Receiver
- Telescopic FM Antenna
- FM Stereo Indicator
- Blue Backlight LCD Display
- Stereo Speakers 2 x 1.5W (RMS)
- Auxiliary Line Input
- AC 230 V / 50Hz , 8 x 1.5V Battery Size C
- Dimensions: 140 x 280 x 249 mm
- Weight: 1,70 kg



## ○ SPT 2320

### CD PLAYER

- Portable CD Player with BT, MP3, USB, AUX and FM Radio
- Output Power: 3 W RMS (2 x 1.5 W)
- CD-R / RW, Bluetooth, MP3 and USB Compatible
- Programmable Playback with 20 Track Memory for CD and 99 Track Memory for MP3
- Bluetooth V2.1
- USB Interface
- AUX-IN Jack 3.5 mm
- AUX-OUT Jack 3.5 mm (Headphones)
- Stereo FM Receiver 87.5 - 108 MHz
- Digital Tuning and Frequency Display
- Preset Memory - 20 Channels in FM Band
- Telescopic FM Antenna
- Clock
- Negative Display with White Digits
- Power: AC 230 V / 50 Hz or 6 x 1.5 V Battery Type C / LR14 (Not Included)
- Consumption: 9 W
- Dimensions: (w / h / d) 256 x 128 x 225 mm
- Weight: 1.16 kg





## ○ SPT 207

### CD PLAYER

- Portable Radio Receiver with CD and Cassette Player
- CD/CDR-W Compatible
- Repeat 1 / All Tracks
- Analogue Tuning Radio
- Stereo AM / FM Receiver
- Telescopic FM Antenna
- FM Stereo Indicator
- 2 Digit Red LED Display
- Single Cassette Recording (Record, Play, Pause, Fast Forward, Rewind, Stop, Record)
- Stereo Speakers 2 x 1 W(RMS)
- Power: AC 230 V / 50Hz or Battery 6 x 1,5 V Type C or UM-2(Not Included)
- Consumption: 10 W
- Dimensions: 290 x 238 x 141 mm
- Weight: 1,8 kg



## ● SPT 1600 BS

## ● SPT 1600 BGN

### CD PLAYER

- Portable CD Player with MP3, USB and FM Radio
- CD-R/RW, MP3 Compatible
- Programmable Playback with 20 Track Memory for CD and 99 Track Memory for MP3
- USB Interface
- Search, Skip, Repeat CD, USB Playback
- Select of Folders
- Stereo FM Receiver 87.5 - 108 MHz
- Digital Tuning and Frequency Display
- Preset Memory - 20 Channels in FM Band
- Telescopic FM Antenna
- FM Stereo Indicator on Display
- Output Power: 2 x 1 W RMS
- Auxiliary Input Jack 3.5 mm
- Power: AC 230 V / 50 Hz or 6 x 1.5 V Battery Type C / LR14 / UM 2 (Not Included)
- Consumption: 12 W
- Dimensions: (w / h / d) 230 x 115 x 220 mm
- Weight: 1.2 kg



## ○ SPT 1200

### CD PLAYER

- Portable CD Player with FM / AM Radio
- CD-R / RW Compatible
- Skip, Repeat CD, Program Play Mode
- FM Receiver 87.5 - 108 MHz
- AM Receiver 522 - 1620 kHz
- Analog Tuning
- Telescopic Antenna
- FM Stereo Indicator on Display
- Output Power: 2 x 1 W RMS
- Auxiliary Input Jack 3.5 mm
- Power: AC 230 V / 50 Hz or 6 x 1.5 V Battery Type C / LR14 / UM 2 (Not Included)
- Consumption: 12 W
- Dimensions: (w / h / d) 197 x 105 x 230 mm
- Weight: 1.16 kg



# PORTABLE RADIOS

## ○ **SRD 6600**

### PORTABLE RADIO

- Digital Radio DAB+ / FM-PLL with Rechargeable Battery
- DAB Tuner, FM Band III
- PLL Tuning, RDS (Radio Data System)
- Preset 20 Station (10 x DAB / 10 x FM)
- Stereo Speakers
- Metal Holder
- Stereo FM Receiver 87.5 - 108 MHz
- DAB+ Receiver 174.928 - 239.200 MHz
- Dot Matrix LCD Display, White Color Backlight
- Sleep Timer
- Telescopic Antenna
- 12/24 Hours Clock Setting
- Output Power 2 x 2 W RMS
- Auxiliary Input Jack 3.5 mm
- Silver and Black Color
- 4-5 Hours Playback Time at 50% Volume Level
- Li-ion Rechargeable Battery 1000 mAh (3.7V)
- Micro USB 5V Charging Port
- 5V / 1A AC Adaptor with Micro USB
- Consumption: 9 W



## ○ **SRD 6400**

### PORTABLE RADIO

- Digital Radio DAB+ / FM-PLL with Rechargeable Battery
- DAB Tuner, FM Band III
- PLL Tuning, RDS (Radio Data System)
- Preset 20 Station (10 x DAB / 10 x FM)
- Stereo FM Receiver 87.5 - 108 MHz
- DAB+ Receiver 174.928 - 239.200 MHz
- Dot Matrix LCD Display, White Color Backlight
- Sleep Timer
- Telescopic Antenna
- 12 / 24 Hours Clock Setting
- Output Power 1.5 W RMS
- Headphone Jack 3.5 mm
- Silver and Black Color
- 6-8 Hours Playback Time at 50% Volume Level
- Li-ion Rechargeable Battery 1000 mAh (3.7V, BL-5C)
- Micro USB 5V Charging Port
- 5V / 1A AC Adaptor with Micro USB
- Consumption: 7 W
- Dimensions: (w / h / d) 170 x 100 x 35 mm
- Weight: 0.3 kg



## ● **SRD 3200 B**

## ○ **SRD 3200 W**

### PORTABLE RADIO

- Portable PLL FM Radio Receiver with BT, USB, Micro SD and AUX
- Output Power: 1.2 W RMS
- Speaker Size: 3" Speaker
- High Sensitivity and Excellent Sound Performance
- Bluetooth V4.0
- USB Interface
- Micro SD Slot
- AUX-IN Jack 3.5 mm
- AUX-OUT Jack 3.5 mm (Headphones)
- FM Receiver Frequency: 87.5 - 108 MHz
- Digital Tuning and Frequency Display
- Preset Memory - 50 Channels in FM Band
- Clock Function
- Sleep Timer
- Alarm Function by Radio / Buzzer / USB / Micro SD
- 360° Rotary Volume Control
- Telescopic FM Antenna
- Rubberized Surface





## ○ SRD 2806

### PORTABLE RADIO

- Portable FM / AM / SW1 / SW2 Radio Receiver
- Output Power: 1 W RMS
- Speaker Size: 3.5" Speaker
- High Sensitivity and Excellent Sound Performance
- AUX-OUT Jack 3.5 mm (Headphones)
- FM Receiver Frequency: 87.5 - 108 MHz
- AM Receiver Frequency: 530 - 1600 kHz
- SW1 Receiver Frequency: 3.2 - 10 MHz
- SW2 Receiver Frequency: 10 - 16 MHz
- Analog Tuning
- Telescopic FM Antenna
- Rubberized Surface of Front Panel
- Carrying Handle
- Power: AC 230 V / 50 Hz or 3 x 1.5 V Battery Type D / LR20 (Not Included)
- Consumption: 5 W
- Dimensions: (w / h / d) 240 x 138 x 82 mm
- Weight: 0,75 kg



## ● SRD 2100 B

## ○ SRD 2100 W

### PORTABLE RADIO

- Portable FM / AM Radio Receiver
- Output Power: 1 W RMS
- Speaker Size: 3" Speaker
- High Sensitivity and Excellent Sound Performance
- AUX-OUT Jack 3.5 mm (Headphones)
- FM Receiver Frequency: 87.5 - 108 MHz
- AM Receiver Frequency: 530 - 1600 kHz
- Analog Tuning
- Telescopic FM Antenna
- Rubberized Surface
- Carrying Handle
- Power: AC 230 V / 50 Hz or 3 x 1.5 V Battery Type C / LR14 (Not Included)
- Consumption: 4 W
- Dimensions: (w / h / d) 208 x 164 x 63 mm
- Weight: 0,63 kg



## ● SRD 210 BS

## ● SRD 210 BGN

## ● SRD 210 B

### PORTABLE RADIO

- Portable Radio
- High Sensitivity and Excellent Sound Performance
- Power Output: 1W RMS
- Speaker Size: 3" Speaker
- Analogue AM/FM receiver
- Frequency : AM 530 - 1600 kHz
- FM 87,5 - 108 MHz
- Telescopic FM Antenna
- 3.5mm Headphone Jack
- With Carrying Handle
- AC Operated Version: 230V 50Hz
- DC Operated: 4.5V (3 x UM-2/C Cell) Batteries not Included
- Consumption: 3,5W
- Unit Dimension: 210(L) x 53(D) x 139(H) mm
- Weight: 635g



# PORTABLE RADIOS



## ● **SRD 215 B**

## ○ **SRD 215 W**

### PORTABLE RADIO

- Pocket Receiver
- FM Band Receiver with Digital Readout
- FM Range: 88MHz to 108MHz
- FM Telescopic Antenna
- USB Connector
- Micro SD Slot (Max 8 GB)
- Support MP3 Format Music Files
- External Earphone Jack
- Audio Input Jack 3,5 mm
- Charge Input MINI USB
- Power: 2W(RMS)
- Play Time: about 10 Hours
- AC 230 V / 50 Hz Power
- Power: Lithium Battery
- Two Colors Version: Black and White
- Dimensions: 72 x 110 x 29 mm



## ○ **SRD 1800**

### PORTABLE FM / AM RADIO RECEIVER

- Output Power: 0.5 W RMS
- AUX-OUT Jack 3.5 mm (Headphones)
- FM Receiver Frequency: 87.5 - 108 MHz
- AM Receiver Frequency: 530 - 1600 kHz
- Analog Tuning
- Telescopic FM Antenna
- Compact Size and Low Weight
- Rubberized Surface
- Power: 2 x 1.5 V Type AA (Batteries Not Included)
- Dimensions: (w / h / d) 125 x 71 x 39 mm
- Weight: 0.19 kg



## ● **SRD 1100 B**

## ○ **SRD 1100 W**

### PORTABLE RADIO

- Pocket Receiver
- Portable FM / AM Radio Receiver
- FM Receiver 87.5 - 108 MHz
- AM Receiver 530 - 1600 kHz
- Analog Tuning
- Telescopic Antenna
- Output Power: 0.3 W RMS
- Headphone Jack 3.5 mm
- Compact size and low weight
- Belt Clip
- Power: 2 x 1.5 V type AAA (Batteries Not Included)
- Dimensions: (w / h / d) 61 x 122 x 27 mm
- Weight: 82 g







## ○ SRC 340 RADIO CLOCK

- PROJECTION CLOCK RADIO
- Digital Display of Clock and Frequency
- Year/Month/Date
- White LED Display 1,8 „(4,6 cm)
- Red Projection of Clock
- Image 180° Rotation with Focus Adjustment
- PLL FM Radio with 10 Presets
- Dual Alarm with Weekend Cancellation
- Wake up With Buzzer or Radio
- Snooze
- Sleep
- Dimmer Display with 3 levels
- Battery Back-Up CR 2032 (Battery not Included)
- AC Power 230V 50 Hz
- Consumption: 5W
- Dimensions: 180 x 100 x 75 mm
- Weight: 455 g



## ● SRC 330 GN

## ● SRC 330 OR

### RADIO CLOCK

- PROJECTION CLOCK RADIO
- Digital Display of Clock and Frequency
- Year/Month/Date
- LED Display 1,2 „(3 cm)
- Red Projection of Clock
- Image 180° Rotation with Focus Adjustment
- PLL FM Radio with Preset
- Indoor Temperature
- Dual Alarm with Weekend Cancellation
- Wake up With Buzzer or Radio
- Snooze
- Sleep
- High/Low Dimmer Display
- Battery Back-Up (Battery not Included)
- AC Power 230V 50 Hz
- Dimensions: 155 x 82 x 72 mm
- Weight: 400 g



## ● SRC 170 GN

## ● SRC 170 OR

### RADIO CLOCK

- FM CLOCK RADIO
- Digital Display of Clock and Frequency
- Year/Month/Date
- LED Display 1,2 „(3 cm)
- PLL FM Radio
- Indoor Temperature
- Dual Alarm with Weekend Cancellation
- Wake up With Buzzer or Radio
- Snooze
- Sleep
- High/Low Dimmer Display
- Battery Back-Up (Battery not Included)
- AC Power 230V 50 Hz
- Dimensions: 155 x 82 x 72 mm
- Weight: 400 g

# RADIO CLOCKS



## ● SRC 3100 B ○ SRC 3100 W

### RADIO CLOCK

- Projection Radio Alarm Clock
- PLL FM Radio with 10 Presets
- FM Receiver 87.5 - 108 MHz
- Amber LED display 0.9"
- Dimmer Function
- Red Projection of Clock
- 180° Rotating Lens with Adjustable Focus
- Dual Alarm
- Wake Up with Buzzer or Radio
- Sleep Function
- Snooze Function
- Battery Back-Up CR-2032 1 x 3 V (Battery Not Included)
- Power: AC 230 V / 50 Hz
- Consumption: 5 W
- Dimensions: (w / h / d) 160 x 60 x 57 mm
- Weight: 370 g



## ○ SRC 1100 W ● SRC 1100 B

### RADIO CLOCK

- Radio Alarm Clock
- PLL FM Radio with 10 Presets
- FM Receiver 87.5 - 108 MHz
- Amber LED display 0.6"
- Dimmer Function
- Dual Alarm
- Wake Up with Buzzer or Radio
- Sleep Function
- Snooze Function
- Battery Back-Up CR-2032 1 x 3 V (Battery Not Included)
- Power: AC 230 V / 50 Hz
- Consumption: 5 W
- Dimensions: (w / h / d) 140 x 57 x 52 mm
- Weight: 290 g



## ○ SRC 136 WH ● SRC 136 B

### RADIO CLOCK

- 0,6" LED Display(1,5 cm)
- PLL FM Radio
- 20 Preset Memory Station
- Dual Alarm Setting
- Hi/Lo Dimmer
- Wake to Radio or Buzzer
- Snooze, Sleep Function
- Battery Back Up: 2 x 1,5 V Type AA(Not Included)
- Power: AC 230 V, 50 Hz
- Consumption: 3,5 W
- Dimension: 120 x 50 x 120 mm
- Weight: 365 g





8GB LCD FM

## ○ SFP 6270

### MP3 PLAYER

- MP3/MP4 Player 8GB
- MP3, WMA Playback
- Plays Music, Video, Photos, Text
- 1,8" TFT LCD Full-Color Display
- Integrated FM Radio
- ID3 Tag and Lyrics Support
- Convert and Play Video File
- Multilingual Menu (ENG, CZ, SK, H, PL)
- USB 2.0 Hi Speed Interface
- Micro SD Card Slot (Max 32GB)
- Programmable Playback (Repeat One, All, Random, Folder, Playlist)
- Equalizer
- Build-in Loudspeaker
- Integrated Rechargeable Battery
- Accessories: Ear Phones, USB Cable
- Dimension: 84,5 x 42,5 x 10 mm
- Weight: 25 g



8GB LCD FM SD micro

## ● SFP 5870 BBU

## ● SFP 5870 BYL

## ● SFP 5870 BS

### MP3 PLAYER

- MP3/MP4 Player 8GB
- MP3, WMA Playback
- Plays Music, Video, Photos, Text
- 1,8/MP4, TFT LCD Full-Color Display
- Integrated FM Radio
- ID3 Tag and Lyrics Support
- Convert and Play Video File
- Multilingual Menu (ENG, CZ, SK, H, PL)
- USB 2.0 Hi Speed Interface
- Micro SD Card Slot (Max 32GB)
- Programmable Playback (Repeat One, All, Random, Folder, Playlist)
- Equalizer
- Build-in Loudspeaker
- Integrated Rechargeable Battery
- Accessories: Ear Phones, USB Cable
- Dimension: 84,5 x 42,5 x 10 mm
- Weight: 25 g



8GB SD micro

## ● SFP 3608 GR

## ● SFP 3608 PK

## ● SFP 3608 BR

### MP3 PLAYER 8 GB WITH MICRO SD SLOT

- 8 GB Internal Memory
- Micro SD Card Slot (Max. 128 GB)
- MP3 and WMA Format Support
- USB Drive Function
- Micro USB Input (Support FAT32 and exFAT)
- Belt Clip
- LED Activity Indicator
- Simple Control
- Elegant Design
- Playback Time 7 Hours (50% Volume)
- Playback Time 5 Hours (100% Volume)
- Built-in Battery (3.7 V, 110 mAh)
- USB Charging
- Package: MP3 Player, Earphones, USB Cable, Manual
- Dimensions: (w / h / d) 34 x 46 x 18 mm
- Weight: 15 g

# EARPHONES/HEADPHONES



IPX4

Bluetooth 4.2

## SEP 500 BK BT EARPHONES

- Wireless Earphones with microphone

### Specifications:

- Driver unit: průměr 10 mm
- Impedance: 32 Ohm +/- 10 %
- Frequency range: 500 Hz - 40 kHz
- Sensitivity: 120 dB +/- 3 dB /1 mW (S.P.L at 1 KHz)
- Microphone Sensitivity: -42 dB±3dB
- Battery: 3,7V, 70mAh Li-ion
- Connector: Micro USB
- Weight : 19 g
- IP X4



- SEP 300 MIC BLACK
- SEP 300 MIC KHAKI
- SEP 300 MIC GREY
- SEP 300 MIC GOLD
- SEP 300 MIC RED
- SEP 300 MIC BLUE
- SEP 300 MIC WHITE
- SEP 300 MIC PINK

## EARPHONES

- Metal Earphones with microphone
- Speaker size: 10mm
- Sensitivity: 96±3dB (at 1kHz 0.5Vrms)
- Impedance: 32 Ω +/- 10 %
- Frequency Response: 20~20kHz
- Cord Length: ≤120cm
- Microphone
- Mic Dimensions: 4x1.5mm
- Sensitivity: 103 dB +/- 3 dB /1 mW (S.P.L at 1 KHz)
- Frequency Response: 30~16000Hz



## ● SEP 189 BLACK ○ SEP 189 WHITE EARPHONES WITH MICROPHONE

SPORT

- Sporting stereo earphones with microphone and clip
- Speaker diameter: 10 mm
- Impedance: 32 +/- 10% #
- Frequency Response: 20 Hz - 20 kHz
- Sensitivity: 98 db +/- 3 dB / 1 mW (the level of acoustic. Pressure at 1 kHz)
- Cable length: 1.25 m ± 5%
- Jack: Ø 3.5 mm
- Microphone Sensitivity: -42 db ± 3 db
- Microphone Frequency range: 20 Hz - 20 kHz
- Microphone impedance: 2.2 K # +/- 5%



- SEP 172 VC BLACK
- SEP 172 VC WHITE
- SEP 172 VC BLUE
- SEP 172 VC RED
- SEP 172 VC GREEN
- SEP 172 VC PINK

## EARPHONES

- In-ear headphones with volume control
- Speaker diameter: 10 mm
- Impedance: 16 Ω +/- 10 %
- Frequency Response: 20 Hz - 20 kHz
- Sensitivity: 96 dB
- Cable length: 1.2 m ± 5 %
- Jack: Ø 3.5 mm

## ○ SEP 700 EARPHONES

- Driver unit: Ø 40 mm
- Impedance: 64 Ω +/- 10 %
- Frequency range: 20 Hz - 20 kHz
- Sensitivity: 100 dB +/- 3 dB /1 mW (S.P.L at 1 KHz)
- Microphone Sensitivity: -38 dB±3dB
- Battery: 3,7V, 300mAh Li-ion
- Charging / Playing time : 2 /18 h
- Connector: Micro USB
- Weight : 199 g



## ● SEP 636 BK ○ SEP 636 WH HEADPHONES

- Driver unit: Ø 40 mm
- Impedance: 32 Ω +/- 10 %
- Frequency range: 20 Hz - 20 kHz
- Sensitivity: 100 dB +/- 3 dB /1 mW
- Cable: 1,2 m ± 5 %
- Plug: Ø 3,5 mm
- Weight: 189 g







## EARPHONES/HEADPHONES



- **SEP 120 BLACK**
- **SEP 120 WHITE**
- **SEP 120 BLUE**
- **SEP 120 RED**
- **SEP 120 TURQUOISE**
- **SEP 120 GREEN**
- **SEP 120 PINK**

### EARPHONES

- Stereo earphones
- Speaker Diameter: Ø 10 mm
- Impedance: 16 Ω + / - 10%
- Frequency response: 20 Hz - 20 kHz
- Sensitivity: 95 db + / - 3 dB / 1 mW (acoustic level. Pressure at 1 kHz)
- Cable length: 1.2 m ± 5%
- Connector: 3.5 mm



- **SEP 255 BL**
- **SEP 255 PK**

### HEADPHONES

- Speaker diameter: Ø 30 mm
- Children Noise Protection, 85 dB max.
- Impedance: 32 Ohm +/- 10 %
- Frequency Range: 20 Hz - 20 kHz
- Sensitivity: 85 dB +/- 3 dB / 1 mW (acoustic pressure level at 1 kHz)
- Cord Length: 1.2 m +/- 5 %
- Connector: 3.5 mm



- **SEP 626**

### HEADPHONES

- Stylish Modern Design
- Comfortable Ear Upholstery and Headband
- Speaker Diameter: 40 mm Diameter
- Impedance: 32 Ohm +/- 10 %
- Frequency Range: 20 Hz - 20 kHz
- Sensitivity: 106 dB +/- 3 dB / 1 mW (acoustic pressure level at 1 kHz)
- Cord Length: 2.2 m +/- 5 %
- Connector: 3.5 mm Diameter



- **SEP 428 BLACK**
- **SEP 428 GREY**

### HEADPHONES

- Stereo headphones
- Stylish modern design
- comfortable padded headphones
- Speaker Diameter: Ø 30 mm
- Impedance: 32 Ω + / - 10%
- Frequency Response: 18 Hz - 20 kHz
- Sensitivity: 116 dB + / - 3 dB / 1 mW (level of acoustic. Pressure at 1 kHz)
- Cable length: 1.2 m ± 5%
- Connector: 3.5 mm





## ● SEP 275 GD

## ● SEP 275 BK

### HEADPHONES

- Stereo headphones
- Ultra lightweight design
- Comfortable leatherette upholstery
- Speaker diameter: Ø 40 mm
- Impedance: 32  $\Omega$  + / - 10%
- Frequency Response: 20 Hz - 20 kHz
- Sensitivity: 106 dB + / - 3 dB / 1 mW (acoustic level. Pressure at 1 kHz)
- Cable length: 2.2 m  $\pm$  5%
- Connector: 3.5 mm



## ○ SEP 629

### HEADPHONES WITH MICROPHONE

- Stylish modern design
- Comfortable leatherette upholstery
- Speaker Diameter: Ø 40 mm
- Impedance: 32  $\Omega$  + / - 10%
- Frequency Response: 20 Hz - 20 kHz
- Sensitivity: 106 dB + / - 3 dB / 1 mW (level of acoustic. Pressure at 1 kHz)
- Cable length: 2,2 m  $\pm$  5%
- Connector: 3.5 mm
- Microphone: Ø 6.0x5.0 mm / -42 dB + / - 3 dB



## ○ SEP 252

### HEADPHONES WITH MICROPHONE


- Stereo headphones with microphone
- Speaker Diameter: Ø 30 mm
- Impedance: 32  $\Omega$  + / - 10%
- Frequency Response: 20 Hz - 20 kHz
- Sensitivity: 95 dB + / - 3 dB / 1 mW (level of acoustic. Pressure at 1 kHz)
- Cable length: 1.2 m  $\pm$  5%
- Connector: 2 x 3.5 mm
- Microphone Sensitivity: 58 db- $\pm$  3dB Microphone frequency range: 30 Hz - 16 kHz



## ○ SEP 14

### MICROPHONE

- Table PC Microphone
- Microphone Frequency range: 30 Hz - 16 kHz
- Microphone Sensitivity: -43 db  $\pm$  4 db
- Cable Length: 1.5m  $\pm$  5 %
- Jack: 3.5 mm

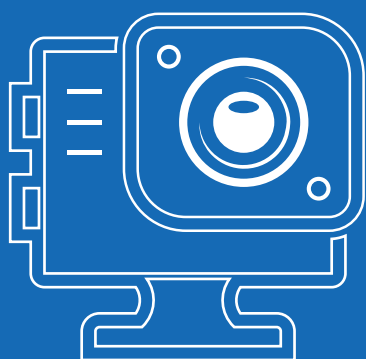

## Cameras >

50 ACTION CAMERAS  
52 ACCESSORIES







## ○ 3CAM 4K04WR

### ACTION CAMERA

- 4K Recording
- CMOS Sony Image Sensor
- 6 -Layer Glass Lens
- Remote Controller
- 2.0" TFT Color Display
- Integrated WiFi

#### Video Resolution:

- 3840 x 2160 (30fps, MP4)
- 2688 x 1520 (30fps, MP4)
- 1920 x 1080 (60fps or 30fps, MP4)
- 1280 x 720 (120fps, 60fps or 30fps, MP4)

#### Photo:

- 16 Mpx / 12 Mpx / 8 Mpx / 5 Mpx / 2 Mpx (JPEG)

#### Other:

- 170° View Angle
- Waterproof: 60m
- Slow Motion Recording
- Loop recording
- Anti-Shaking
- PC Camera
- Support up to 64GB Micro SDHC card (not included)
- Battery: 2x 3.7V/900 mAh Li-Ion
- Built-in Speaker
- Micro USB, Micro HDMI
- Dimension: 59 x 41 x 29mm
- Weight: 53g
- Accessories:
- 2x batteries, waterproof case, helmet mount set, set for mounting without waterproof case, selfie or tripod mount set, clothes attachment clip, handle bar or pole mount set, cable ties, 3M adhesive tapes, metal cable, USB data cable, USB charger, user's manual, wiping cloth



## ○ 3CAM 2001

### ACTION CAMERA

- 2" TFT Color Display
- Waterproof: 60m
- High Dynamic Range (HDR)

#### Video Resolution:

- 1920 x 1080 (30fps, AVI, interpolated)
- 1280 x 720 (30fps, AVI)
- 640 x 480 (30fps, AVI)

#### Photo:

- 12/10/8/5/3/2/1.3 MPx (JPEG)

#### Other:

- 120° View Angle
- Loop recording
- Support up to 32GB Micro SDHC card (not included)
- Battery: 3.7V/900 mAh Li-Ion
- Built-in Speaker
- Micro USB
- Dimension: 59 x 41 x 29mm
- Weight: 65g

#### Accessories:

- Battery, waterproof case, helmet mount set, set for mounting without waterproof case, selfie or tripod mount set, clothes attachment clip, handle bar or pole mount set, cable ties, 3M adhesive tapes, metal cable, USB data cable, USB charger, user's manual, wiping cloth





○ **3CAM CAR SET**  
ACCESSORIES

- Universal kit of holder and car charger for action video cameras
- Universal holder for most types of action video cameras
- Setting in 3 directions
- Attachment using universal system used by manufacturers of action video cameras
- Material: ABS + PVC
- Maximum load: 500 g
- Adapter
- Mini USB connector
- Input voltage: 12–24 V DC
- Output voltage: 5 V/1 A DC



○ **3CAM WATER SET**  
ACCESSORIES

- 3CAM WATER SET
- Universal for most ACTION CAMERAS
- Float
- Material: Neoprene SBR CR + High Density Pearl Cotton
- Weight: 20 g
- Floating Grip
- Material: PC Material + Iron Nickel Plating Screw
- Dimension: 155 x 42 x 60 mm
- Weight: 50 g

## ○ 3CAM HOLDER SET

### ACCESSORIES

- Universal holder for head and chest for action video cameras
- Universal holder for most types of action video cameras
- Adjustable size for comfortable wear
- Attachment using universal system used by manufacturers of action video cameras
- Suitable for all types of sports and activities
- Material: ABS + Stretch Nylon
- Weight: 77 g (head), 150 g (chest)
- Tripod
- Plastic rubberized body for controlled attachment to all surfaces
- Adjustable size using removable parts of the structure
- Material: TPR (Thermoplastic rubber)
- Dimensions: 5 × 5 × 26 cm
- Weight: 151 g



## ○ 3CAM CHARGER SET

- Dual Docking Charger
- Universal for all types of SENCOR Action Cameras Batteries
- Input: 5V/2A
- Output: 4.2V/0.75A (2x)
- Adapter
- Input: AC 100-240V ~ 60/50Hz
- Output: DC 5V/2A
- Cable with Micro USB Connector



## ○ 3CAM BATTERY ACCESSORIES

- Spare Battery for SENCOR 3CAM 5200W, 3CAM 2000, 3CAM 4K01W
- 3.7V Li-Ion, 900mAh 3.33Wh



## House

- 54 WEATHER STATIONS
- 66 DIGITAL CLOCKS
- 70 WIRELESS DOORBELLS
- 71 DIGITAL PHOTOFRAMES

# WEATHER STATIONS



## ○ SWS 9700 WEATHER STATION

- Professional Weather Station
- Wireless 5-in-1 Sensor
- 256 Colors Changing Display
- TRUE COLOR Display with Diagonal 5,8 inch (14,7 cm)
- 3 Color Changing Mode with TRUE BLACK Background:
- 12 ~ 24 Hour Forecast Based on Changing Air Pressure and Temperature
- Icon Weather Forecast (Sunny, Slightly Cloudy, Cloudy, Rainy, Stormy, Snowy)
- Barometric Pressure in Relative or Absolute Readings
- Max / Min Memory Records with Time-Date Stamps
- Past 24 Hours Hourly Record
- Alert Setting High / Low (Indoor / Outdoor Temperature and Humidity, Wind-Speed, and Rainfall)







## ○ SWS 8800 WEATHER STATION



- Weather Station with Multi Color Display
- TRUE COLOR Display with Diagonal 4.88" (12.4 cm)
- 256 Colors Changing Display for Temperature and Humidity Segments (Separately)
- White Color for Time / Weather Forecast Segment
- 3 Color Changing Mode with TRUE BLACK Background:
  - 1) LOOP: 256 Color Auto-Loop On / Off
  - 2) PALETTE: 256 Customized Colors
  - 3) OUTDOOR CONDITIONS: 13 Color Change by Temperature, 7 by Humidity
- PMVA TRUE COLOR Display: Ultra High Contrast Ratio, Wide Viewing Angle, Sunlight Readability
- Weather Forecast Icon (Sunny, Partly Cloudy, Cloudy, Rainy, Snowy)
- Indoor Temperature and Humidity Reading with Trend
- Outdoor Temperature and Humidity Reading with Trend
- Temperature Display with °C / °F Selectable
- Ice Alert Function, Heat Index Reading with Risk Level, Mold Risk Indicator
- Alert Setting High / Lo (Indoor / Outdoor Temperature and Humidity)
- Max / Min Memory Records
- Past 24 Hours Hourly Record
- Alarm and Snooze Function
- Radio Controlled Clock by Signal DCF77, with DST Updated (Manual Setting Possible)
- 3 Level Display Brightness: Hi / Lo / Off
- Desktop Placement
- Low Battery Indicator for Wireless Sensor
- Support up to 8 Sensors
- 1 Sensor Included (SWS TH8700-8800)
- Transmission Between Main Unit and Sensor up to 30 m (in Open Area)
- Sensor Transmission Frequency: 433 MHz
- Power Adaptor of Main Unit: DC 5 V / 500 mA (Included), Consumption: • Battery Back-Up of Main Unit: 1 x CR-2032 3 V (Included)
- Battery Power of Sensor: 2 x AA size 1.5 V (Batteries Not Included - Lithium Batteries Recommended)
- Dimensions of Main Unit: (w / h / d) 90 x 149 x 44 mm
- Weight of Main Unit: 226 g (with Battery, without Adapter)
- Dimensions of Wireless Sensor: (w / h / d) 61 x 113 x 39.5 mm
- Weight of Wireless Sensor: 92 g

# WEATHER STATIONS



## ○ SWS 8700

### WEATHER STATION

- Weather Station with Multi Color Display
- TRUE COLOR Display with Diagonal 7.13" (18.1 cm)
- 256 Colors Changing Display for Temperature and Humidity Segments (Separately)
- White Color for Time / Weather Forecast Segment
- 3 Color Changing Mode with TRUE BLACK Background:
  - 1) LOOP: 256 Color Auto-Loop On / Off
  - 2) PALETTE: 256 Customized Colors
  - 3) OUTDOOR CONDITIONS: 13 Color Change by Temperature, 7 by Humidity
- PMVA TRUE COLOR Display: Ultra High Contrast Ratio, Wide Viewing Angle, Sunlight Readability
- 12 ~ 24 Hour Forecast Based on Changing Air (Barometric) Pressure and Temperature
- Weather Forecast Icon (Sunny, Partly Cloudy, Cloudy, Rainy, Snowy)
- Barometric Pressure in Relative or Absolute Readings (hPa / mmHg / inHg)
- Indoor Temperature and Humidity Reading with Trend
- Outdoor Temperature and Humidity Reading with Trend
- Temperature Display with °C / °F Selectable
- Ice Alert Function, Heat Index Reading with Risk Level, Mold Risk Indicator
- Alert Setting High / Lo (Indoor / Outdoor Temperature and Humidity)
- Max / Min Memory Records
- Past 24 Hours Hourly Record
- Alarm and Snooze Function
- Radio Controlled Clock by Signal DCF77, with DST Updated (Manual Setting Possible)
- 3 Level Display Brightness: Hi / Lo / Off
- Desktop Placement
- Low Battery Indicator for Wireless Sensor
- Support up to 8 Sensors
- 1 Sensor Included (SWS TH8700-8800)
- Transmission Between Main Unit and Sensor up to 30 m (in Open Area)
- Sensor Transmission Frequency: 433 MHz
- Power Adaptor of Main Unit: DC 5 V / 500 mA (Included), Consumption:
- Battery Back-Up of Main Unit: 1 x CR-2032 3 V (Included)
- Battery Power of Sensor: 2 x AA size 1.5 V (Batteries Not Included - Lithium Batteries Recommended)
- Dimensions of Main Unit: (w / h / d) 220 x 83 x 39 mm
- Weight of Main Unit: 296 g (with Battery, without Adapter)



## ○ SWS 8400

### WEATHER STATION

- Weather Station
- Wireless Sensor
- 256 Colors Changing Display
- TRUE COLOR Display with Diagonal 7.56" (19.2 cm)
- 4 Color Changing Mode with TRUE BLACK Background:
  - 1) LOOP: 256 Color Auto-Loop On / Off
  - 2) RAINBOW: 8 Rainbow Color
  - 3) OUTDOOR TEMP: 17 Color Change by Outdoor Temperature
  - 4) ROTARY KNOB: 256 Color Fine Tuning Manually
- PMVA TRUE COLOR Display: Ultra High Contrast Ratio, Wide Viewing Angel, Sunlight Readability
- 12 ~ 24 Hour Forecast Based on Changing Air (Barometric) Pressure and Temperature
- Weather Forecast Icon (Sunny, Partly Cloudy, Cloudy, Rainy, Snowy)
- Indoor Temperature and Humidity Reading
- Outdoor Temperature and Humidity Reading
- Max / Min Memory Records
- Ice Alert Function
- Alarm and Snooze Function
- Radio Controlled Clock by Signal DCF77, with DST Updated (Manual Setting Possible)
- 3 Level Display Brightness: Hi / Lo / Off
- Desktop Placement
- Low Battery Indicator
- Support up to 3 Sensors
- 1 Sensor Included (SWS TH8400)
- Transmission Between Main Unit and Sensor up to 30 m (in Open Area)
- Sensor Transmission Frequency: 433 MHz
- Power Adaptor of Main Unit: DC 4.5 V / 300 mA (Included), Consumption: 1.35 W
- Battery Back-Up of Main Unit: 1 x CR-2032 3 V (Included)
- Battery Power of Sensor: 2 x AA size 1.5 V (Batteries Not Included - Lithium Batteries Recommended)
- Dimensions of Main Unit: (w / h / d) 230 x 87.5 x 49 mm
- Weight of Main Unit: 307 g (with Battery, without Adapter)



# WEATHER STATIONS

## ○ SWS 5600 WEATHER STATION



- Weather Station with Wireless Sensor
- Weather Forecast Icon (Sunny, Partly Cloudy, Cloudy, Rainy, Snowy)
- Indoor Temperature and Humidity Reading
- Outdoor Temperature and Humidity Reading
- Max / Min Memory Records (24 h)
- Indoor Temperature Range: -10°C to +50°C
- Outdoor Temperature Range: -20°C to +50°C
- Indoor and Outdoor Humidity Range: 20% to 99% RH
- Temperature Display with °C / °F Selectable
- 3 Level Display Brightness: Hi / Lo / Off
- Digital Time, Date and Weekday
- Alarm and Snooze Function
- Radio Controlled Clock by Signal DCF77 (Manual Setting Possible)
- 12 / 24 Hours Selectable Format
- Color LCD Display
- Desktop Placement
- Low Battery Indicator for Wireless Sensor
- 1 Sensor Included
- Transmission Between Main Unit and Sensor up to 30 m (in Open Area)
- Sensor Transmission Frequency: 433 MHz
- Battery Power: 3 x 1.5 V Type AAA (Batteries Not Included)
- Power Adaptor of Main Unit: DC 4.5 V / 150 mA (Included), Consumption: 0.9 W
- Power of Sensor: 2 x 1.5 V Type AAA (Batteries Not Included)
- Dimensions of Main Unit: (w / h / d) 122 x 118 x 52 mm
- Weight of Main Unit: 227 g



## ○ SWS 5200 WEATHER STATION



- Weather Station with Wireless Sensor
- Weather Forecast Icon (Sunny, Slightly Cloudy, Cloudy, Rainy)
- Indoor Temperature and Humidity Reading
- Outdoor Temperature and Humidity Reading
- Max / Min Memory Records
- Indoor Temperature Range: 0°C to +50°C
- Outdoor Temperature Range: -20°C to +50°C
- Indoor and Outdoor Humidity Range: 20% to 95% RH
- Temperature Display with °C / °F Selectable
- Digital Time and Date
- Alarm and Snooze Function
- 12 / 24 Hours Selectable Format
- Sensor Low Battery Indicator
- Color LED Display
- Desktop Usable
- Outdoor Sensor Included
- Transmission Between Main Unit and Sensor up to 30 m (in Open Area)
- Sensor Transmission Frequency: 433 MHz
- Battery Back-Up: 2 x 1.5 V LR44 / AG13 (Included)
- Power Adaptor: DC 5 V / 500 mA (Included)
- Power of Sensor: 2 x 1.5 V Type AAA (Batteries Not Included)
- Consumption: < 1.6 W
- Dimensions of Main Unit: (w / h / d) 152.5 x 96 x 59 mm
- Weight of Main Unit: 177 g



# WEATHER STATIONS



## ○ SWS 270

### WEATHER STATION

- Color Weather Station with Wireless Temperature and Humidity Sensor
- Radio Controlled Clock DCF
- Color Display with Diagonal 4,7" (12 cm)
- Indoor Temperature Range: 0 to 50°C
- Outdoor Temperature Range: -50 to 70°C
- Indoor and Outdoor Humidity Range: 20 to 95% RH
- 12 Hour Forecast Based on Changing Air Pressure
- Power of Sensor: 2 x 1,5 V Type AAA (Not Included)
- Dimensions of Weather Station : 148 x 138 x 17,5 mm (wxhxd)
- Weight of Weather Station: 215 g
- Dimensions of Sensor: 50 x 105 x 34 mm
- Weight of Sensor: 45 g



## ○ SWS 5270

### WEATHER STATION

- Weather Station with Wireless Sensor
- Weather Forecast Icon (Sunny, Partly Cloudy, Cloudy, Rainy, Stormy)
- Indoor Temperature and Humidity Reading
- Outdoor Temperature and Humidity Reading
- Air Pressure Readout (hPa)
- Weather Trend Indicator
- Frost Alert Icon
- Max / Min Memory Records (with Manual Reset)
- Indoor Temperature Range: 0°C to +50°C
- Outdoor Temperature Range: -25°C to +70°C
- Indoor and Outdoor Humidity Range: 20% to 95% RH
- Temperature Display with °C / °F Selectable
- 2 Levels of Display Brightness: Hi / Lo
- Digital Time and Date / Air Pressure Readout
- Dual Alarm
- Snooze Function
- Radio Controlled Clock by Signal DCF77 (Manual Setting Possible)
- 12 / 24 Hours Selectable Format
- Color LCD Display
- Desktop Placement
- Low Battery Indicator of Wireless Sensor
- Support up to 3 Sensors
- Function Auto Scrolling Measured Data of All Three Outdoor Sensors
- 1 Sensor Included (SWS TH270-TH5270)
- Transmission Between Main Unit and Sensor up to 50 m (in Open Area)
- Sensor Transmission Frequency: 433 MHz
- Battery Power: 3 x 1.5 V Type AAA (Batteries Not Included)
- Power Adaptor of Main Unit: DC 5 V / 1.2 A (Included),
- Consumption: < 1 W
- Power of Sensor: 2 x 1.5 V Type AAA (Batteries Not Included)
- Dimensions of Main Unit: (w / h / d) 200 x 98 x 50 mm





# WEATHER STATIONS



## ○ SWS 240 WEATHER STATION

- Weather stations with wireless sensor temperature measurement
- Radio controlled clock DCF
- Internal and external temperature
- Weather forecast with 4 icons
- Broadcasting frequency: 433 MHz
- The internal temperature of 0 °C to 50 °C
- Outdoor temperature: -25 °C to 70 °C
- Weather Station Power: 1 x 3V Battery CR2032 (not included) and AC adapter (included)
- Sensor supply: 2 x 1.5V AAA (not included)
- Weather Station Dimensions: 130 x 140 x 25 mm (WxHxD)
- Weather Station Weight: 195 g
- Sensor Dimensions: 50 x 105 x 34 mm
- Weight sensor: 45 g



## ○ SWS 280 WEATHER STATION

- Color LCD Display (78 x 195 mm)
- Radio Controlled Time and Date
- Day of Week in 8 Languages Selectable
- Daily Snooze Alarm Function
- Indoor and Outdoor Temp - Humidity
- Indoor Measurable Range: -10 to 50°C
- Outdoor Measurable Range: -20 to 50°
- Indoor & Outdoor Measurable Range: 20 to 99% RH
- 24 Hour Max and Min Temp - Humidity
- Wall Mount or Desktop
- 433MHz RF Transmitting Frequency
- 30 m Transmission Range in an Open Area
- Power Supply:
- Main Unit: Battery 3 x 1,5 V Type AA (Not Included)
- Adaptor DC 4,5 V (Included)
- Sensor: 2 x 1.5V Type AAA
- Unit: 121 x 28 x 195 mm , Weight: 335 g



## ○ SWS 4300 WEATHER STATION

- Weather Station with Wireless Sensor
- Weather Forecast Icon (Sunny, Slightly Cloudy, Cloudy, Rainy)
- Indoor Temperature and Humidity Reading
- Outdoor Temperature and Humidity Reading
- Max / Min Memory Records
- Indoor Temperature Range: 0°C to +50°C
- Outdoor Temperature Range: - 20°C to +50°C
- Indoor and Outdoor Humidity Range: 20% to 95% RH
- Temperature Display with °C / °F Selectable
- Digital Time and Date
- Alarm and Snooze Function
- 12 / 24 Hours Selectable Format
- Sensor Low Battery Indicator
- Color Non-Shining LED Display
- Desktop Usable, Ideal for Bedrooms
- Outdoor Sensor Included
- Transmission Between Main Unit and Sensor up to 30 m (in Open Area)
- Sensor Transmission Frequency: 433 MHz
- Battery Back-Up: 2 x 1.5 V LR44 / AG13 (Included)
- Power Adaptor: DC 5 V / 500 mA (Included)
- Power of Sensor: 2 x 1.5 V Type AAA (Batteries Not Included)

### Consumption:

- Dimensions of Main Unit: (w / h / d) 106 x 109 x 38.5 mm
- Weight of Main Unit: 157 g





# WEATHER STATIONS



## ○ SWS 4660

### WEATHER STATION

- Weather Station with Wireless Sensor
- Icon Weather Forecast (Sunny, Slightly Cloudy, Cloudy, Rainy, Stormy, Snowy)
- Indoor Temperature and Humidity Reading
- Outdoor Temperature and Humidity Reading
- Air Pressure Readout (hPa)
- Historical Bar Chart Display of Pressure
- Weather Trend Indicator
- Freezing Alert Function
- Max / Min Memory Records
- Indoor Temperature Range: 0°C to +50°C
- Outdoor Temperature Range: - 20°C to +60°C
- Indoor and Outdoor Humidity Range: 20% to 90% RH
- Temperature Display with °C / °F Selectable
- Moon Phase, Digital Time
- Date and Weekday
- Dual Alarm
- Snooze Function
- Radio Controlled Clock by Signal DCF77 (Manual Setting Possible)
- 12 / 24 Hours Selectable Format
- Color LCD Display



## ○ SWS 4250

### WEATHER STATION

- Weather Station with Wireless Sensor
- Weather Forecast Icon (Sunny, Slightly Cloudy, Cloudy, Rainy)
- Indoor Temperature and Humidity Reading
- Outdoor Temperature and Humidity Reading
- Max / Min Memory Records
- Indoor Temperature Range: 0°C to +50°C
- Outdoor Temperature Range: - 20°C to +60°C
- Indoor and Outdoor Humidity Range: 20% to 90% RH
- Temperature Display with °C / °F Selectable
- Digital Time, Date and Weekday
- Alarm and Snooze Function
- Radio Controlled Clock by Signal DCF77 (Manual Setting Possible)
- 12 / 24 Hours Selectable Format
- Color LCD Display
- Desktop Placement or Wall Mountable
- Support up to 3 Sensors
- 1 Sensor Included (SWS TH4250)
- Transmission Between Main Unit and Sensor up to 30 m (in Open Area)
- Sensor Transmission Frequency: 433 MHz
- Battery Power: 3 x 1.5 V Type AAA (Batteries Not Included)



## ○ SWS 4000

### WEATHER STATION

- Weather Station with Wireless Sensor
- Weather Forecast Icon (Sunny, Slightly Cloudy, Cloudy, Rainy)
- Indoor Temperature and Humidity Reading
- Outdoor Temperature and Humidity Reading
- Max / Min Memory Records
- Indoor Temperature Range: 0°C to +50°C
- Outdoor Temperature Range: - 20°C to +60°C
- Indoor and Outdoor Humidity Range: 20% to 90% RH
- Temperature Display with °C / °F Selectable
- Digital Time, Date and Weekday
- Alarm and Snooze Function
- Radio Controlled Clock by Signal DCF77 (Manual Setting Possible)
- 12 / 24 Hours Selectable Format
- Color LCD Display
- Desktop Placement or Wall Mountable
- Support up to 3 Sensors
- 1 Sensor Included (SWS TH4000)
- Transmission Between Main Unit and Sensor up to 30 m (in Open Area)
- Sensor Transmission Frequency: 433 MHz
- Battery Power: 3 x 1.5 V Type AAA (Batteries Not Included)
- Power Adaptor: DC 4.5 V / 150 mA (Included)





DCF  
Signal

Forecast

## ○ SWS 5551

### WEATHER STATION

- Weather Station with Wireless Sensor
- Icon Weather Forecast (Sunny, Slightly Cloudy, Cloudy, Rainy, Stormy, Snowy)
- Weather Forecast with Trend Indicator
- Barometric Pressure in Relative or Absolute Readings (hPa / mb / inHg)
- Historical Bar Chart Display for Pressure Changes (-1, -2, -3, -6, -12, -18, -24 hours)
- Indoor Temperature and Humidity Reading with Trend
- Outdoor Temperature and Humidity Reading with Trend
- Max / Min Memory Records
- Past 24 Hours Hourly Record for Barometric Reading
- Indoor Temperature Range: -5°C to +50°C
- Outdoor Temperature Range: -20°C to +60°C
- Indoor and Outdoor Humidity Range: 20% to 90% RH
- Temperature Display with °C / °F Selectable
- Moon Phase, Digital Time
- Date and Weekday (Weekday in 5 languages : EN / FR / DE / ES / IT)
- Alarm Clock Function with Low Temperature Pre-Alarm
- Dual Alarm



DCF  
Signal

Forecast

## ○ SWS 5451

### WEATHER STATION

- Weather Station with Wireless Sensor
- Icon Weather Forecast (Sunny, Slightly Cloudy, Cloudy, Rainy, Stormy, Snowy)
- Weather Forecast with Trend Indicator
- Barometric Pressure in Relative or Absolute Readings (hPa / mb / inHg)
- Indoor Temperature and Humidity Reading with Trend
- Outdoor Temperature and Humidity Reading with Trend
- Max / Min Memory Records
- Past 24 Hours Hourly Record for Barometric Reading
- Indoor Temperature Range: -5°C to +50°C
- Outdoor Temperature Range: -20°C to +60°C
- Indoor and Outdoor Humidity Range: 20% to 90% RH
- Temperature Display with °C / °F Selectable
- Moon Phase, Digital Time
- Date and Weekday (Weekday in 5 languages : EN / FR / DE / ES / IT)
- Alarm Clock Function with Low Temperature Pre-Alarm
- Dual Alarm
- Snooze Function



DCF  
Signal

Forecast

## ○ SWS 5051

### WEATHER STATION

- Weather Station with 3-Day Weather Forecast
- Icon Weather Forecast (Sunny, Slightly Cloudy, Cloudy, Rainy, Stormy, Snowy)
- 3-Days Weather Forecast (24 / 48 / 72 hours) with Trend
- Barometric Pressure in Relative or Absolute Readings (hPa / mb / inHg)
- Historical Bar Chart Display for Pressure Changes (-1, -2, -3, -6, -12, -18, -24 hours)
- Indoor Temperature and Humidity Reading with Trend
- Outdoor Temperature and Humidity Reading with Trend
- Max / Min Memory Records
- Past 24 Hours Hourly Record for Barometric Reading
- Indoor Temperature Range: -5°C to +50°C
- Outdoor Temperature Range: -20°C to +60°C
- Indoor and Outdoor Humidity Range: 20% to 90% RH
- Temperature Display with °C / °F Selectable
- Moon Phase, Digital Time
- Date and Weekday (Weekday in 5 languages : EN / FR / DE / ES / IT)
- Alarm Clock Function with Low Temperature Pre-Alarm
- Dual Alarm
- Snooze Function



# WEATHER STATIONS



## ● SWS 51 B

## ○ SWS 51 W

### WEATHER STATION

- Weather Station with Wireless Thermometer and Hygrometer
- Large Backlight Display
- Radio Controlled Clock
- Time, Date, Month, Day, Moon Phase
- 12/24 Hour Selectable, Alarm, Snooze
- Max./Min. Memory for Hygro-Thermometer
- Icons of Comfort Index
- Icons of Weather Forecast
- Humidity Measurement Accuracy: +8%
- No of Remote Unit: Up to 3 Units
- Radio Frequency: 433MHz, Max.30m in the Open Air
- Power:
  - Main Unit: 3 x 1.5V Type AA
  - Transmitter: 2 x 1.5V Type AAA
  - Battery Not Included



## ● SWS 3000 B

## ○ SWS 3000 W

### WEATHER STATION

- Weather Station with Wireless Sensor
- Weather Forecast Icon (Sunny, Slightly Cloudy, Cloudy, Rainy, Snow)
- Indoor Temperature and Humidity Reading
- Outdoor Temperature and Humidity Reading
- Indoor and Outdoor Temperature Trend
- Max / Min Memory Records
- Indoor Temperature Range: 0°C to +60°C
- Outdoor Temperature Range: - 20°C to +60°C
- Indoor and Outdoor Humidity Range: 20% to 90% RH
- Temperature Display with °C / °F Selectable
- Moon Phase, Digital Time
- Date and Weekday (Weekday in 7 languages: EN / IT / ES / DE / FR / NE / DA)
- Alarm and Snooze Function
- 12 / 24 Hours Selectable Format
- LCD Display with Short White Backlight
- Low Battery Indicator
- Desktop Placement or Wall Mountable
- Support up to 3 Sensors



## ● SWS 2900

### THERMOMETER

- Weather Station with Wireless Sensor
- Indoor Temperature and Humidity Reading
- Outdoor Temperature and Humidity Reading
- Max / Min Memory Records
- Indoor Temperature Range: 0°C to +60°C
- Outdoor Temperature Range: - 20°C to +60°C
- Indoor and Outdoor Humidity Range: 20% to 90% RH
- Temperature Display with °C/°F Selectable
- Indoor Comfortable Indicator
- Humidity Ambient Change Icon
- Digital Time
- 12 / 24 Hours Selectable Format
- LCD Display with Short White Backlight
- Touch Buttons on the Screen
- Desktop Placement or Wall Mountable
- Support up to 3 Sensors
- 1 Sensor Included (SWS TH2900)
- Transmission Between Main Unit and Sensor up to 50 m (in Open Area)
- Sensor Transmission Frequency: 433 MHz
- Power: 3 x 1.5 V Type AAA (Batteries Not Included)
- Power of Sensor: 2 x 1.5 V Type AAA (Batteries Not Included)
- Dimensions of Main Unit: (w / h / d) 142 x 98 x 22 mm
- Weight of Main Unit: 160 g





## ○ SWS 2025 THERMOMETER

- Thermometer with Wireless Sensor
- Indoor Temperature Reading
- Outdoor Temperature Reading
- Max / Min Memory Records
- Indoor Temperature Range: 0°C to +50°C
- Outdoor Temperature Range: -20°C to +60°C
- Temperature Display with °C / °F Selectable
- Wake Up with Buzzer
- Alarm and Snooze Function
- 12 / 24 Hours Selectable Format
- LCD Display with Short White Backlight
- Desktop Placement
- 1 Sensor Included
- Transmission Between Main Unit and Sensor up to 30 m (in Open Area)
- Sensor Transmission Frequency: 433 MHz
- Battery Power: 2 x 1.5 V Type AAA (Batteries Not Included)
- Power of Sensor: 2 x 1.5 V Type AAA (Batteries Not Included)
- Dimensions of Main Unit: (w / h / d) 78 x 78 x 30 mm
- Weight of Main Unit: 66 g



LCD

## ● SWS 25 BS ○ SWS 25 WS THERMOMETER

- Wireless Thermometer
- Time
- 12/24 Hour Selectable
- Indoor Temperature, Outdoor Temperature
- Indoor temperature range: -9 to +50
- Outdoor temperature range: -30 to +55
- Temperature Accuracy: ±1.5°C
- Outdoor Temperature Trend
- Record MIN/MAX Temperature
- Only One Sensor
- RF: 433 MHz
- Distance in open area up to 30 m
- Power – Main Unit: Battery 2 x 1.5V Type AAA (Not Included)
- Transmitter: Battery 2 x 1.5 Type AAA (Not Included)
- Dimensions of Main Unit: 76 x 28 x 106 mm
- Weight: 81 g
- Dimensions of Transmitter: 60 x 27 x 96 mm
- Weight: 53 g



LCD

## ● SWS 1500 B ○ SWS 1500 W THERMOMETER

- Thermometer with Alarm Clock
- Indoor Temperature and Humidity
- LCD Display with Short Blue Backlight
- Digital Time
- 12 / 24 Hours Selectable Format
- Calendar
- Wake Up with Buzzer
- Alarm and Snooze Function
- Temperature Display with °C / °F Selectable
- Indoor Temperature Range: 0°C ~ +50°C
- Indoor Humidity Range: 20% ~ 90%
- Min / Max Temperature and Humidity Recording
- Power: 1 x 1.5 V type AA (Battery Not Included)
- Dimensions: (w / h / d) 93 x 94 x 38 mm
- Weight: 101 g



LCD



# WEATHER STATIONS



| MODEL                         | SWS 9700   | SWS 8800  | SWS 8700  | SWS 8400    | SWS 5600   | SWS 5200    |
|-------------------------------|------------|-----------|-----------|-------------|------------|-------------|
| Radio controlled time         | Yes        | Yes       | Yes       | Yes         | Yes        | No          |
| Indoor temperature index      | Yes        | Yes       | Yes       | Yes         | Yes        | Yes         |
| Outdoor temperature index     | Yes        | Yes       | Yes       | Yes         | Yes        | Yes         |
| Date                          | Yes        | No        | No        | Yes         | Yes        | Yes         |
| Alarm                         | Yes        | Yes       | Yes       | Yes         | Yes        | Yes         |
| Snooze                        | Yes        | Yes       | Yes       | Yes         | Yes        | Yes         |
| Calendar                      | Yes        | No        | No        | No          | No         | No          |
| Moon phase                    | No         | No        | No        | No          | No         | No          |
| Barometric pressure           | Yes        | No        | Yes       | No          | No         | No          |
| Pressure history              | Yes        | No        | No        | No          | No         | No          |
| Weather forecast              | Yes        | Yes       | Yes       | Yes         | Yes        | Yes         |
| Sensor in packaging           | Yes        | Yes       | Yes       | Yes         | Yes        | Yes         |
| Humidity                      | Yes        | Yes       | Yes       | Yes         | Yes        | Yes         |
| Wireless transfer from sensor | Yes        | Yes       | Yes       | Yes         | Yes        | Yes         |
| Height x Width x Depth (mm)   | 168x136x24 | 90x149x44 | 220x83x39 | 87,5x230x49 | 122x118x52 | 96x152,5x59 |
| Weight                        | 370 g      | 92 g      | 92 g      | 307 g       | 227 g      | 177 g       |



| MODEL                         | SWS 270   | SWS 5270  | SWS 240    | SWS 280    | SWS 4300     | SWS 4660   |
|-------------------------------|-----------|-----------|------------|------------|--------------|------------|
| Radio controlled time         | Yes       | Yes       | Yes        | Yes        | No           | Yes        |
| Indoor temperature index      | Yes       | Yes       | Yes        | Yes        | Yes          | Yes        |
| Outdoor temperature index     | Yes       | Yes       | Yes        | Yes        | Yes          | Yes        |
| Date                          | Yes       | Yes       | No         | Yes        | Yes          | Yes        |
| Alarm                         | Yes       | Yes       | Yes        | Yes        | Yes          | Yes        |
| Snooze                        | Yes       | Yes       | Yes        | Yes        | Yes          | Yes        |
| Calendar                      | No        | Yes       | No         | Yes        | No           | Yes        |
| Moon phase                    | No        | No        | No         | No         | No           | Yes        |
| Barometric pressure           | Yes       | Yes       | No         | No         | No           | Yes        |
| Pressure history              | Yes       | No        | No         | No         | No           | No         |
| Weather forecast              | Yes       | Yes       | Yes        | Yes        | Yes          | Yes        |
| Sensor in packaging           | Yes       | Yes       | Yes        | Yes        | Yes          | Yes        |
| Humidity                      | Yes       | Yes       | No         | Yes        | Yes          | Yes        |
| Wireless transfer from sensor | Yes       | Yes       | Yes        | Yes        | Yes          | Yes        |
| Height x Width x Depth (mm)   | 138x14x18 | 200x98x50 | 140x130x25 | 195x121x28 | 109x106x38,5 | 173x125x22 |
| Weight                        | 215 g     | 205 g     | 195 g      | 335 g      | 157 g        | 244 g      |







| MODEL                         | SWS 4250   | SWS 4000  | SWS5551   | SWS5451   | SWS5051   | SWS 51     |
|-------------------------------|------------|-----------|-----------|-----------|-----------|------------|
| Radio controlled time         | Yes        | Yes       | Yes       | Yes       | Yes       | Yes        |
| Indoor temperature index      | Yes        | Yes       | Yes       | Yes       | Yes       | Yes        |
| Outdoor temperature index     | Yes        | Yes       | Yes       | Yes       | Yes       | Yes        |
| Date                          | Yes        | Yes       | Yes       | Yes       | Yes       | Yes        |
| Alarm                         | Yes        | Yes       | Yes       | Yes       | Yes       | Yes        |
| Snooze                        | Yes        | Yes       | Yes       | Yes       | Yes       | Yes        |
| Calendar                      | No         | No        | Yes       | Yes       | Yes       | Yes        |
| Moon phase                    | No         | No        | Yes       | Yes       | Yes       | Yes        |
| Barometric pressure           | No         | No        | No        | No        | No        | No         |
| Pressure history              | No         | No        | No        | No        | No        | No         |
| Weather forecast              | Yes        | Yes       | Yes       | Yes       | Yes       | Yes        |
| Sensor in packaging           | Yes        | Yes       | Yes       | Yes       | Yes       | Yes        |
| Humidity                      | Yes        | Yes       | Yes       | Yes       | Yes       | Yes        |
| Wireless transfer from sensor | Yes        | Yes       | Yes       | Yes       | Yes       | Yes        |
| Height x Width x Depth (mm)   | 125x173x22 | 161x99x26 | 65x100x35 | 65x100x35 | 65x100x35 | 140x185x30 |
| Weight                        | 238 g      | 197 g     | 219 g     | 194 g     | 188 g     | 330 g      |



| MODEL                         | SWS 3000  | SWS 2900  | SWS 2025 | SWS 25    | SWS 1500 |
|-------------------------------|-----------|-----------|----------|-----------|----------|
| Radio controlled time         | No        | No        | No       | No        | No       |
| Indoor temperature index      | Yes       | Yes       | Yes      | Yes       | Yes      |
| Outdoor temperature index     | Yes       | Yes       | Yes      | Yes       | No       |
| Date                          | Yes       | Yes       | No       | No        | No       |
| Alarm                         | Yes       | Yes       | Yes      | No        | Yes      |
| Snooze                        | Yes       | No        | Yes      | No        | Yes      |
| Calendar                      | Yes       | No        | No       | No        | Yes      |
| Moon phase                    | Yes       | No        | No       | No        | No       |
| Barometric pressure           | No        | No        | No       | No        | No       |
| Pressure history              | No        | No        | No       | No        | No       |
| Weather forecast              | Yes       | No        | No       | No        | No       |
| Sensor in packaging           | Yes       | Yes       | Yes      | Yes       | No       |
| Humidity                      | Yes       | Yes       | No       | No        | Yes      |
| Wireless transfer from sensor | Yes       | Yes       | Yes      | Yes       | No       |
| Height x Width x Depth (mm)   | 161x80x23 | 98x142x22 | 78x78x30 | 106x76x36 | 94x93x38 |
| Weight                        | 165 g     | 160 g     | 66 g     | 75 g      | 101 g    |



# DIGITAL CLOCKS



## ○ SDC 8200

### DIGITAL CLOCK WITH ALARM

- Projection Alarm Clock With Thermometer And Calendar
- 256 Colors Changing Display
- TRUE COLOR Display with Diagonal 4,3" (11 cm)
- 4 Color Changing Mode with TRUE BLACK Background:
  - 1) LOOP: 256 Color Auto-Loop On / Off
  - 2) RAINBOW: 8 Rainbow Color
  - 3) TUNE: 256 Color Manual-Tune
  - 4) INDOOR TEMP: 13 Color Change by Indoor Temperature
- PMVA TRUE COLOR Display: Ultra High Contrast Ratio, Wide Viewing Angel, Sunlight Readability
- Display of Time, Indoor Temperature and Date or Alarm
- Time and Temperature Projection
- Image 180° Rotation with Focus Adjustment
- Indoor Temperature, Max / Min Temperature Records
- 12 / 24 Hour Selectable, Calendar
- Dual Alarm
- Wake Up with Buzzer
- Snooze Function
- Radio Controlled Clock and Date by Signal DCF77 (Manual Setting or Turn off Possible)
- Date and Weekday (Weekday in 7 Languages: EN / FR / DE / ES / IT / NL / RU)
- 3 Level Display Brightness: Hi / Lo / Off
- Desktop Usable
- Power Adapter: DC 4.5 V / 300 mA (Included)
- Consumption: 1.2 W
- Battery Back-Up: 1 x CR-2032 3 V (Included)
- Dimensions: (w / h / d) 163 x 80 x 56 mm
- Weight: 248 g (with Battery, without Adapter)



## ○ SDC 7200

### DIGITAL CLOCK WITH ALARM

- Digital Alarm Clock With Thermometer and USB Charger
- 256 Colors Changing Display
- TRUE COLOR Display with Diagonal 3" (7.6 cm)
- 3 Color Changing Mode with TRUE BLACK Background:
  - 1) LOOP: 256 Color Auto-Loop On / Off
  - 2) RAINBOW: 8 Rainbow Color
  - 3) TUNE: 256 Color Manual-Tune
- PMVA TRUE COLOR Display: Ultra High Contrast Ratio, Wide Viewing Angel, Sunlight Readability
- Two USB Charging Ports (Total Maximum Output: 2.1 A)
- Display of Time, Indoor Temperature and Date
- Indoor Temperature (°C / °F)
- 12 / 24 Hour Selectable, Calendar
- Alarm: Wake Up with Buzzer
- Snooze Function
- 3 Level Display Brightness: Hi / Lo / Auto-Dimming
- Solar Panel for Auto-Adjust Backlight Brightness
- Date and Weekday (Weekday in 5 Languages: EN / FR / DE / ES / IT)
- Desktop Usable
- Power Adapter: DC 5 V / 2.5 A (Included)
- Consumption: 0.8 / 12 W (without / with Full Charging by USB)
- Battery Back-Up: 1 x CR-2032 3 V (Included)
- Dimensions: 138 x 68 x 47 mm (w / h / d)
- Weight: 147 g (with Battery, without Adapter)





## ○ SDC 5100

### DIGITAL CLOCK WITH ALARM

- Digital Alarm Clock With USB Charger And Manual Brightness Tune
- Big Display with Diagonal 5.1" (13 cm)
- White LED 1.8" (4,6 cm)
- Dimmer Function with Manual Brightness Tune by Rotary Control
- Brightness Levels: High / 80-10%
- USB Charging Port: 5 V / 2.1 A
- 24-Hour Time Display
- Dual Alarm
- Wake Up with Buzzer
- High-Low Buzzer Selection
- Snooze Function
- Desktop Usable
- Power supply: AC 100-240 V, 50 / 60 Hz
- Power Adapter: DC 5 V / 2.5 A (Included)
- Consumption: 1.2 W
- Battery Back-Up: 1 x CR-2032 3 V (Battery Not Included)
- Dimensions: (w / h / d) 174 x 74 x 100 mm
- Weight: 164 g (with Battery, without Adapter)



## ● SDC 4930

### DIGITAL CLOCK WITH ALARM

- Big Digital Clock with Night Light and Manual Brightness Tune
- Big Display with Diagonal 5.1" (13 cm)
- White LED Digits 1.8" (4.6 cm) Height
- Dimmer Function with Manual Brightness Tune by Rotary Control
- Brightness Levels: High / Low Adjustable
- Adjustable Low Dim by Rotary Dial (85% - 20%)
- Night Light On / Off
- 24-Hour Time Display
- Dual Alarm
- Wake Up with Buzzer
- High-Low Buzzer Selection
- Snooze Function
- Desktop Usable
- Power supply: AC 100-240 V, 50 / 60 Hz
- Power Adapter: DC 5 V / 600 mA (Included)
- Consumption: < 1 W
- Battery Back-Up: 1 x 3 V CR-2032 (Battery Not Included)
- Dimensions: (w / h / d) 180 x 95 x 50 mm
- Weight: 190 g with Battery, without Adapter



# DIGITAL CLOCKS



## ○ SDC 4912 WH

## ● SDC 4912 BU

### DIGITAL CLOCK WITH ALARM

- Digital Alarm Clock With USB Charger
- Display with Diagonal 3.2" (8.2 cm)
- LED 0.9" (2.3 cm) Digits
- USB Charging Port: 5 V / 2.1 A
- 24-Hour Time Display
- Dual Alarm
- Wake Up with Buzzer
- Snooze Function
- Dimmer Function
- Brightness Levels: High / Low / Off
- Desktop Usable
- Power supply: AC 100-240 V, 50 / 60 Hz
- Power Adapter: DC 5 V / 2.5 A (Included)
- Consumption: 1.2 W
- Battery Back-Up: 1 x CR-2032 3 V (Battery Not Included)
- Dimensions: (w / h / d) 165 x 70 x 39 mm
- Weight: 103 g (with Battery, without Adapter)



## ○ SDC 120

### DIGITAL CLOCK WITH ALARM

- Big Digital Clock with Dual Alarm
- Curved Blue LED Display
- Size of Digits 4,7 cm(1,85")
- Dual Alarm
- Ascending Alarm
- Programmable Snooze from 5 to 60 Minutes
- Hi-Lo-Off Dimmer
- Battery Back up 1 x 3 V Type CR-2032 (Not Included)
- Power: Adaptor DC 5 V/300 mA (Included)
- Consumption: 1W
- Dimensions (W x H x D) 171 x 87 x 40 mm
- Weight: 140 g



## ● SDC 4800 B

## ○ SDC 4800 W

### DIGITAL CLOCK WITH ALARM

- Digital Alarm Clock with Thermometer
- Color Display with Diagonal 3.4" (8.6 cm)
- 3 Level Display Brightness: Hi / Lo / Off
- Radio Controlled Clock and Date by Signal DCF77 (Manual Setting Possible)
- Display of Time, Indoor Temperature and Date
- Indoor Temperature (°C / °F)
- 12 / 24 Hour Selectable, Calendar
- Alarm: Wake Up with Buzzer
- Snooze Function
- Date and Weekday (Weekday in 8 languages: EN / IT / ES / DE / FR / NE / DA / RU)
- Desktop Usable
- Power Adapter: DC 4.5 V / 150 mA (Included)
- Consumption: 0.45 W
- Battery Back-Up: 1 x CR-2032 3 V (Included)
- Dimensions: 105 x 57 x 29 mm (w / h / d)
- Weight: 117 g (with Battery, without Adapter)







## ○ SDC 4400

### DIGITAL CLOCK WITH ALARM

- Alarm Clock With LED Night Light
- USB Charging Port: 5 V / 1000 mA
- LED Night Light
- Amber LED display 0.9"
- Dimmer Function
- Dual Alarm
- Wake Up with Buzzer
- Snooze Function
- Battery Back-Up CR-2032 1 x 3 V (Battery Not Included)
- Power supply: AC 100-240 V, 50 / 60 Hz
- Dimensions: (w / h / d) 135 x 68 x 60 mm
- Weight: 260 g (with AC / DC adaptor)



## ● SDC 2800 B

## ○ SDC 2800 W

### DIGITAL CLOCK WITH ALARM

- Digital Alarm Clock with Thermometer
- LCD Display with Short White Backlight
- Nightlight Display Function
- Digital Time
- 12 / 24 Hours Selectable Format
- Calendar with 7 Weekday Languages
- Wake Up with Buzzer
- Dual Alarm
- Snooze Function
- Indoor Temperature Range: 0°C ~ +50°C
- Temperature Display with °C / °F Selectable
- Desktop Usable
- Power: 2 x 1,5 V type AAA (Batteries Not Included)
- Dimensions: (w / h / d) 129 x 67 x 40 mm
- Weight: 137 g



## ● SDC 1200 B

## ○ SDC 1200 W

### DIGITAL CLOCK WITH ALARM

- Alarm Clock with Thermometer
- Radio Controlled Clock by Signal DCF77
- LCD Display with Short White Backlight
- Digital Time
- 12 / 24 Hours Selectable Format
- Calendar with 7 Weekday Languages
- Wake Up with Buzzer
- Snooze Function (5 minutes)
- Indoor Temperature Range: 0°C ~ +60°C
- Temperature Display with °C / °F Selectable
- Power: 2 x 1,5 V type AAA (Batteries Not Included)
- Dimensions: (w / h / d) 78 x 78 x 30 mm
- Weight: 72 g



# WIRELESS DOORBELLS



## ○ **SWD 112**

### WIRELESS DOORBELL

- Wireless digital doorbell
- 48 tunes
- LED indicators on the bell and key
- Wireless digital doorbell chime is composed of two buttons
- Transmission frequency 433 MHz
- Button with IP44
- Range in open space without electromagnetic interference: up to 150 m
- LED indicators on the bell and key
- Bell Power: 230V, 50Hz
- Power button 1 x LR23 (included)
- Consumption: 3W
- Dimensions bell: 90 x 80 x 23 mm
- Weight: 95 g
- Dimensions of the 85 x 40 x 21 mm
- Weight: 35 g



IP44

## ● **SWD 110**

### WIRELESS DOORBELL

- Wireless Digital Door Bell Consists of Door Bell and Button
- 48 melodies
- Radio Frequency: 433 Mhz
- Button with IP 44 Protection
- Range: 150 m in Open Space without Electromagnetic Interference
- Optical Signalization on Door Bell and Button
- Power of Door Bell: ~230 V 50 Hz
- Power of Button: 1 x LR23A (Included)
- Consumption: 3W
- Dimensions of Door Bell: 90 x 80 x 23 mm
- Weight: 95 g
- Dimensions of Button: 85 x 40 x 21 mm
- Weight: 35 g



IP44

## ● **SWD 100**

### WIRELESS DOORBELL

- Wireless Digital Door Bell Consists of Door Bell and Button
- 48 melodies
- Radio Frequency: 433 MHz
- Button with IP 44 Protection
- Range: 150 m in Open Space without Electromagnetic Interference
- Optical Signalization on Door Bell and Button
- Power of Door Bell: 3 x 1,5 V, Type AAA
- Power of Button: 1 x LR23A (Included)
- Consumption: 80mW
- Dimensions of Door Bell: 89 x 81 x 24 mm
- Weight: 75 g
- Rozměry tlačítka: 85 x 40 x 21 mm
- Váha: 35 g



IP44



# DIGITAL PHOTOFRAMES

## ○ SDF 1271

### DIGITAL PHOTOFRAME



- Digital Photo Frame
- 12,1 Inch (30,7 cm) 16:9 TFT LED Screen
- High Resolution 1280 x 800 Pixels
- Card Reader (SD/SDHC/MMC).
- USB 2.0 slot support
- Speaker: 2x2W
- Menu in CZ, SK, HU, PL, EN
- Video Player Format: 720P RMVB MPEG1(VCD, SVCD), MPEG2(DVD), MPEG4(DIVX,AVI)
- Audio Player Format: MP3, WMA
- Still Picture Formats JPEG
- Still Photo/Pictures Slideshow
- Adjustable Slideshow Interval
- Calender/Clock/Alarm/Timer
- Adjustable Brightness
- Remote Control
- Earphone output connector
- Wall mountable VESA 100 x 100 mm
- Desktop Stand
- AC Adaptor 100-240 V/ DC 12 V 1 A (included)
- Dimensions: 298x200x24mm (wxhxd)

## ● SDF 1061 BK

## ○ SDF 1061 WE

### DIGITAL PHOTOFRAME



- Digital Photo Frame
- 10,1 Inch (25,7 cm) 16:9 TFT LED Screen
- High Resolution 1024 x 600 Pixels
- Card Reader (SD/SDHC/MMC).
- USB 2.0 slot support
- Speaker: 2 x 2W
- Menu in CZ, SK, HU, PL, EN
- Video Player Format: 720P RMVB MPEG1(VCD, SVCD), MPEG2(DVD), MPEG4(DIVX,AVI)
- Audio Player Format: MP3, WMA
- Still Picture Formats JPEG
- Still Photo/Pictures Slideshow
- Adjustable Slideshow Interval
- Calender/Clock/Alarm/Timer
- Adjustable Brightness
- Remote Control
- Earphone output connector
- Wall mountable VESA 75 x 75 mm
- Desktop Stand

## ● SDF 1060 B

## ○ SDF 1060 W

### DIGITAL PHOTOFRAME



- 10,2 Inch (25,9 cm) 16:9 LCD
- Screen • Resolution 1024 x 600 Pixels • Card Reader (MMC/SD/SDHC) • Plug & Play by USB 2.0 Slot , Support
- USB Flash Drive • Speaker : 1W x 2 • Menu in CZ, SK, HU, PL, EN • Video Player Format: MPEG4/MPEG2/M-JPEG, Xvid, AVI
- Supports Still Picture Formats JPEG, BMP, GIF • Still Photo/Pictures Slideshow • Adjustable Slideshow Interval • Music
- Format Support : MP3, MPEG1, MPEG2, OGG • Calender/Clock/Alarm • Remote Control • Adjustable Brightness and Contrast • Desktop Stand • Wall mountable • AC Adaptor Included •
- Dimensions: 272x185x23mm • Weight: 560 g



# DIGITAL PHOTOFRAMES



## ● SDF 873 B

## ○ SDF 873 W

### DIGITAL PHOTOFRAME



- Extra Slim Design
- 8 Inch (20,32 cm) 16:9 TFT LED Screen
- High Resolution 1280 x 768 Pixels
- Brightness: 200 cd/m2
- Contrast: 800:1
- Card Reader (SD/SDHC).
- USB 2.0 Micro
- Speaker: 1W
- Menu in CZ, SK, HU, PL, EN
- Video Player Format: H.264 / MOV / MJPEG / DIVX / AVI / MKV / MP4
- Still Picture Formats JPG / JPEG / BMP / PNG
- Still Photo/Pictures Slideshow
- Adjustable Slideshow Interval
- Music Format Support: MP3
- Calendar/Clock/Alarm
- Adjustable Brightness and Contrast
- Remote Control
- AC Adaptor 100-240 V (included)
- Dimensions: 195x140x52mm (wxhxd)
- Weight: 410 g



## ● SDF 740 BK

## ○ SDF 740 GY

### DIGITAL PHOTOFRAME



- 7 Inch (17,8 cm)
- 16:9 LCD Screen • High Resolution 800 x 480 pixels • LED
- Backlight • Card Reader (SD/SDHC/MMC/MS). • USB 2.0 Slot
- Supports USB Flash drive. • Menu in CZ, SK, HU, PL, EN • Supports
- Still Picture Format JPEG • With Calendar & clock function
- Still Photo/Pictures Slideshow • Adjustable Slideshow Interval
- Adjustable Brightness • Foldable Stand • AC Adaptor DC
- 5V/1.0A Included • Power Consumption: • 205x140x22mm (wxhxd) • Weight: 350 g



## ● SDF 732 B

## ○ SDF 732 W

### DIGITAL PHOTOFRAME



- 7 Inch (17,8 cm) 16:9 TFT LED Screen • High Resolution 800 x 480 Pixels • Card
- Reader (SD/SDHC/MMC). • USB 2.0 Slot Supports USB
- Flash drive. • Menu in CZ, SK, HU, PL, EN • Supports
- Still Picture Format JPEG • With Calendar & Clock • Still Photo/Pictures
- Slideshow • Adjustable Slideshow Interval • Adjustable Contrast
- Adjustable Brightness • Desktop Stand • Wall Mountable
- AC Adaptor DC 5V/1.0A Included • Power Consumption:
- <5W • Dimensions: 225x145x25mm (wxhxd) • Weight: 350 g



## ● SDF 733 B

## ○ SDF 733 W

### DIGITAL PHOTOFRAME



- Digital Photo Frame
- 7 Inch (17,8 cm) 16:9 TFT LED Screen
- High Resolution 800 x 480 Pixels
- Card Reader (SD/SDHC/MMC).
- USB 2.0 slot support
- Menu in CZ, SK, HU, PL, EN
- JPEG Compatible Picture Format
- Adjustable Slideshow Effect
- Adjustable Slideshow Interval
- Adjustable Contrast and Color Saturation
- Picture Zoom/Rotate/Size Function
- Wall mountable
- Desktop Stand
- AC Adaptor 100-240 V/ DC 5 V 1 A (included)
- Dimensions: 205x142x24mm (wxhxd)







## Car accessories >

|    |                 |
|----|-----------------|
| 74 | CAR CAMERAS     |
| 75 | CAR RADIOS      |
| 77 | SUBWOOFERS      |
| 78 | SPEAKERS        |
| 79 | PARKING SYSTEMS |
| 80 | CAR ADAPTER     |
| 81 | ALCOHOLTESTERS  |
| 82 | FM MODULATORS   |

# CAR CAMERAS



## ○ SCR 4200 CAR CAMERA

- Slim and Compact Body
- 170° Viewing Angle
- G-Sensor
- Display: 3" LCD
- Parking Monitor
- Loop Recording
- Motion Detection

### Video Resolution:

- 1920x1080 (1080P, 30 fps)
- 1280x720 (720P, 30 fps)
- 640x480 (VGA, 30 fps)

### Photo:

- JPEG - 12M, 10M, 8M, 5M, 3M, 2M, 1.3M, VGA

### Other:

- Multilingual Language OSD
- Storage: Micro SD Card up to 32 GB (not included)
- Battery: Built-in 3.7V/180mAh Li-ion
- Mini USB Port
- Dimension: 89 x 54 x 34mm

### Accessories:

- Car Mount, Car Charger, User Manual



FHD

## ○ SCR 2200 CAR CAMERA

- Slim and Compact Body
- 120° Viewing Angle
- G-Sensor
- Display: 3" LCD
- Parking Monitor
- Loop Recording
- Motion Detection

### Video Resolution:

- 1920x1080 (1080P, 30 fps, Interpolated)
- 1280x720 (720P, 30 fps)
- 848x480 (WVGA, 30 fps)
- 640x480 (VGA, 30 fps)

### Photo:

- JPEG - 12M, 10M, 8M, 5M, 3M, 2M, 1.3M, VGA

### Other:

- Multilingual Language OSD
- Storage: Micro SD Card up to 32 GB (not included)
- Battery: Built-in 3.7V/180mAh Li-ion
- Mini USB Port
- Dimension: 89 x 54 x 34mm

### Accessories:

- Car Mount, Car Charger, User Manual



HD

## ○ SCR 5000GS KAMERA DO AUTA

- SCR 5000GS is a new generation of car cameras, very powerful and sympathetically small. High-quality sensor provide high native resolution (1920x1080 pixels). When driving at night, the camera can switch to STARLIGHT VISION mode. Furthermore, you have two night filters, color and black and white. Sensitive built in GPS module show your speed on display and your position into video files. These files can be playback in basic player or in the map view application. Of course there is recording in the loop, the oldest record is replaced by a new one. G-Sensor detect of crash and lock current file for later use in proving the culprit of the accident.

- In-built GPS Modul
- Small and Compact Body
- STARLIGHT Vision
- 170° Viewing Angle
- Display: 1.5" LCD

### Video Resolution:

- 1728x1296 (interpolated, 30 fps)
- 1920x1080 (1080P, 30 fps)
- 1280x720 (720P, 30 fps)

### Photo:

- JPEG - 12M, 10M, 8M, 5M, 3M, 2M, 1.3M, VGA

### Other:

- Parking Monitor
- Loop Recording
- Motion Detection
- G-Sensor
- Multilingual Language OSD
- Storage: Micro SD Card up to 128 GB (not included)
- Battery: Built-in 3.7V/180mAh Li-ion
- Mini USB Port
- Dimension: 55 x 47.5 x 41mm
- Accessories: Car Mount, Car Charger, User Manual



HD





## ○ SCT 9411BMR

### CAR RADIO

#### Display

- 7" Touch Screen TFT Color LCD Screen with Widescreen Image (16:9)
- Full-Motorized Monitor Mechanism
- Resolution: 800 x 480
- Automatic Tilt and In / Out Adjustment

#### Tuners

- PLL FM/AM (18 Presets for FM, 12 Presets for AM)
- RDS (Radio Data System)
- PTY, AF, TA, PS

#### Sound

- Music Formats: MP3, WMA, OGG Vorbis, FLAC, APE, AAC, AC3, DTS, PCM, RA
- Output power 4 x 40 W max.
- Equalizer (Standard, Classic, Rock, Pop, Classic, Jazz, Electric)
- Bass & Treble Controls
- Balance & Fader Controls

#### Video, Picture

- Video Formats: MKV, AVI, MOV/MP4, ASF, FLV, RMVB, MPG/VOB, WMV, 3GP, DAT
- Pictures: JPEG, GIF, BMP, PNG, TIFF

#### Connectivity

- Bluetooth 2.1 A2DP (Music Stream, Calling)
- USB port (1A Charging)
- SD/MMC Slot
- Front A/V Input

#### Others

- Full Detachable Front Panel
- Adjustable Backlight Colors (Green/Blue/Red/Yellow/Cyan/Fuchsia/White)
- Digital Clock
- Input for Connection Rear Camera
- Front and Rear RCA
- Subwoofer Output
- ISO Connector
- Remote Control
- Power Supply 12V (11-14.4V)



## ○ SCT 8017BMR

### CAR RADIO

#### Features

- 3" TFT Display
- Full Detachable Front Panel
- Blue Backlight
- Digital Clock

#### Tuners

- PLL FM/AM (18 Presets for FM, 12 Presets for AM)
- RDS (Radio Data System)
- PTY, AF, TA, PS

#### Sound

- MP3, WMA, FLAC, OGG
- Output power 4 x 40 W max.
- Equalizer (3 Band)
- Bass & Treble Controls

#### Video, Picture

- MP4, MOV, AVI, MKV, FLV, WMV, TS, ASF, PMP, RMVB, MPG, VOB
- JPEG, GIF, BMP, PNG

#### Connectivity

- Bluetooth 2.1 A2DP
- USB port
- SD/MMC Slot
- Front AUX Input

#### Others

- Input for Connection Rear Camera
- Front and Rear RCA
- Subwoofer Output
- Built-in ISO Connector



## ○ SCT 6011DBMR

### CAR RADIO

#### Features

- Full Detachable Front Panel
- Blue Backlight
- Digital Clock

#### Tuners

- DAB+ (Digital Audio Broadcasting)
- PLL FM/AM (18 Presets for FM, 12 Presets for AM)
- RDS (Radio Data System)
- PTY, AF, TA, PS, CT

#### Sound

- MP3, WMA, FLAC, WAV, AAC
- Output power 4 x 40 W max.
- Equalizer (7 Band)
- Bass & Treble Controls
- Balance & Fader Controls
- Loudness

#### Connectivity

- Bluetooth 2.1 A2DP (Music Stream, Calling)
- USB Port (1A Charging)
- SD/MMC Slot
- Front AUX Input

#### Others

- Front and Rear RCA
- SMB Antenna Connector
- Built-in ISO Connector
- Remote Control
- Power Supply 13.8 V (10.8-15.6 V)

# CAR RADIOS



## ○ SCT 5051BMR CAR RADIO

### Features

- Full Detachable Front Panel
- Adjustable Backlight Colors (GREEN/BLUE/YELLOW/CYAN/PURPLE/WHITE)
- Digital Clock

### Tuners

- PLL FM/AM (18 presets for FM, 12 presets for AM)
- RDS (Radio Data System)

### Sound

- MP3,WMA,FLAC, WAV
- Output power 4 x 40 W max.
- 2 Band Equalizer (7 Presets)
- Bass & Treble Controls



## ○ SCT 5017BMR CAR RADIO

- Integrated Bluetooth Receiver and Microphone
- MP3/WMA Player
- USB/SD/MMC Input
- Front AUX Input
- Full Detachable Front Panel
- LCD Display with Scrolling Text
- Radio Data System (RDS)
- 30 Synthesized AM/FM Tuner (18 for FM, 12 for AM)
- Preset EQ Curves
- Separate Bass & Treble Controls
- Balance & Fader Controls
- Loudness

## ○ SCT 4058MR CAR RADIO

- Car radio with media player
- USB port + SD/MMC slot for flash card
- Output power 4 x 40 W max.
- RDS (PTY, AF, TA, PI, PS)
- PLL FM/AM tuner, 18 presets for FM, 12 preset for AM
- MP3, WMA, ID3 Tag, Equalizer, bass enhancement
- Digital clock
- Adjustable illumination color (six colors - RED/PINK/PURPLE/BLUE/CYAN/GREEN)
- Removable front panel
- Front Line-In (Cinch)
- Amplifier Line-Out (Cinch)
- Integrated ISO connector
- Power supply 13.8 V (10.8-15.6 V)
- Weight 1.1 kg



## ○ SCT 3018MR CAR RADIO

- MP3/WMA Player
- USB/SD/MMC Input
- Front AUX Input
- Full Detachable Front Panel
- LCD Display with Scrolling Text
- Radio Data System (RDS)
- 30 Synthesized AM/FM Tuner (18 for FM, 12 for AM)
- Preset EQ Curves
- Separate Bass & Treble Controls
- Balance & Fader Controls
- Loudness
- RCA Line Out
- Remote Control
- Output Power: 40 Watts x 4 Ch
- ISO-DIN Mounting



## ○ SCT 3017MR CAR RADIO

- MP3/WMA Player
- USB/SD/MMC Input
- Front AUX Input
- Full Detachable Front Panel
- LCD Display with Scrolling Text
- Radio Data System (RDS)
- 30 Synthesized AM/FM Tuner (18 for FM, 12 for AM)
- Preset EQ Curves
- Separate Bass & Treble Controls
- Balance & Fader Controls
- Loudness
- RCA Line Out
- Remote Control
- Output Power: 40 Watts x 4 Ch
- ISO-DIN Mounting





## ○ SCS WA 1203

### SUBWOOFER

- 12" Active Subwoofer
- 300mm Black Paper and Non-press Cone
- Fine Quality NBR Rubber-Edge
- Round High Density Paper Tube
- With High Power and Low Distortion Amplifier
- Woofer Diameter 30 cm (12")
- Max. Peak Output Power 600 W
- Max. RMS Power Output 300W
- THD : < 0,5%
- Full Frequency Range 25 - 3000 Hz + / -1.0 db
- Frequency Low Pass 50 - 500Hz + / -1.5 db
- Adjustable Low Pass Filter
- Input Sensitivity 0.15 ~ 8V
- Speaker Impedance 4Ω
- Stereo RCA Input Connectors

600W

30 cm



## ○ SCS WA 1003

### SUBWOOFER

- 10" Black Paper and Non-press Cone
- Fine Quality NBR Rubber-Edge
- Round Horn Type Tube
- High Power and Low Distortion Amplifier
- Woofer Diameter 25 cm (10")
- Max. Peak Output Power 400 W
- Max. RMS Power Output 120 W
- Full Frequency Range 40 - 3000 Hz + / -1.0 dB
- Frequency Low Pass 50 - 250Hz
- Adjustable Low Pass Filter
- Adjustable Phase Shift 0° - 180°
- Adjustable Volume
- Input Sensitivity 0.2 ~ 6V
- Speaker Impedance 4#
- Stereo RCA Input Connectors
- Dimensions (WxHxD): 450x288x306 mm
- Weight: 6.7 Kg

400W

25 cm

# SPEAKERS



## ○ SCS BX 6902 SPEAKER

86 dB

- 6"x 9" Oval, Dimension (165x235 mm)
- 4-Band Coaxial
- Rubber Membrane Suspension
- Coil Diameter 1.25" (30 mm) ASV
- Diameter 58 mm Mid Speaker
- Diameter Piezo Tweeter 2x15 mm
- Frequency Range 65-20000Hz
- Sensitivity 86dB/W/m
- Impedance: 4
- Nominal Power 35W
- Maximum Power 105W
- Magnet Dimensions 100x60x18 mm
- Mounting Depth 80 mm



## ○ SCS BX 1602 SPEAKER

17 cm

85 dB

- 6.5"/17 cm in Diameter
- 2-Band Coaxial
- Rubber Membrane Suspension
- Coil Diameter 1" (25 mm) ASV
- Diameter 28 mm Tweeter
- Frequency Range 78-20000Hz
- Sensitivity 85dB/W/m
- Impedance: 4
- Nominal Power 30W
- Maximum Power 90W
- Magnet Size 80x40x15 mm



## ○ SCS BX 1302 SPEAKER

13 cm

84 dB

- 5.25"/13 cm in Diameter
- 2-Band Coaxial
- Rubber Membrane Suspension
- Coil Diameter 1" (25 mm) ASV
- Diameter 28 mm Tweeter
- Frequency Range 95-20000Hz
- Sensitivity 84dB/W/m
- Impedance: 4
- Nominal Power 25W
- Maximum Power 75W
- Magnet Size 70x32x10 mm



## ○ SCS BX 1002 SPEAKER

- 4"/10 cm in Diameter
- 2-Band Coaxial
- Rubber Membrane Suspension
- Coil Diameter 1" (25 mm) ASV
- Diameter 28 mm Tweeter
- Frequency Range 105-20000Hz
- Sensitivity 84dB/W/m
- Impedance: 4
- Nominal Power 20W
- Maximum Power 60W
- Magnet Size 70x32x10 mm



## ○ SCA PARK200 PARKING SYSTEM

- 4 Parking Sensor System
- Showing the Distance from the Obstacle on the Display
- Automatic Activation When the Reverse Gear Chosen
- Wireless Connection Between Display and Control Box
- Audible/Voice Warnings Available (Attention/Warning/Stop)
- Obstacle Detection from 0.3 to 2 m from the Bumper
- All Weather Design (-40° to +80° C)
- Suitable for All Cars
- Pack Contains: 1 Command Module, 4 Ultrasonic Sensors (Shiny Black), 1 Acoustic Indicator – Wireless LCD Display, 1 Power Supply Cable, 1 Hole Borer, 1 Accessory Kit, 1 Instruction Manual



## ○ SCA PARK100 PARKING SYSTEM

- Car Parking System
- 4 Parking Sensor System with a Sound Detection of Obstacles
- Automatic Activation When the Reverse Gear is Chosen
- Alarm in Three-Stage Sound: Beep Sound (the Faster, the Closer to Obstacle)
- Obstacle Detection from 150 cm to 80 mm from the Bumper
- Anti-False Installation Technology
- All Weather Design (-40° to +80° Celsius)
- High Quality and Easy to Install
- Pack contains:
  - 1 command module
  - 4 ultrasonic sensors (shiny black)
  - 1 acoustic indicator
  - 1 power supply cable
  - 1 hole borer
  - 1 accessory kit
  - 1 instruction manual



# CAR ADAPTER



## ○ SCH 440 CAR ADAPTER



- Car USB Charger & Tripple socket
- USB Charger Output 5V/500 mA
- Suitable to Charge Phone, PDA, MP3 Player etc.
- Triple Socket with 12 V/5 A Output (Total Max.)
- 5 A Fuse
- Cigarette lighter plug with 50 cm cord



## ○ SCH 340 CAR ADAPTER



- USB Charger with Two Ports - 5V / max. 2,1A
- Input Voltage 12V DC
- Output to two USB (5V/2.1A + 2,1A)
- Available for Mobile Phones, iPhones, iPad etc
- Simultaneous Charging of Two Devices
- Dimensions: 88 x 31 x 26 mm
- Weight: 30 g



## ○ SCH 335 CAR ADAPTER



- 2x USB charger 5V/2,4A
- For charging mobile phones, smartphones and other mobile devices.
- Input voltage DC 12-24V
- Smart fuse for surge protection



## ○ SCH 335 CAR ADAPTER



- USB Charger with Two Ports - 5V / max. 2,4A
- Input Voltage 12 - 24 V DC
- Output to two USB (5V/1,2A + 1,2A)
- Simultaneous Charging of Two Devices
- Dimensions: 70 x 30 x 21 mm
- Weight: 16 g



## ○ SCH 311 CAR ADAPTER



- USB charger 5V/1A
- For charging mobile phones, smartphones and other mobile devices.
- Input voltage DC 12-24V
- Smart fuse for surge protection
- Dimensions: 19 x 18 x 65 mm
- Weight: 12 g







Fuel cell

## ○ SCA BA50 ALCOHOLTESTER

- The Sencor SCA BA50FC professional breathalyzer will detect the exact amount of alcohol in the blood from your breath within seconds. Using a calibrated electrochemical sensor (Fuel Cell), breath alcohol is measured with an accuracy better than 0.08 ‰ BAC. That's why you do not have to worry about residual alcohol, which you might not have discovered with your cheap alcohol testers using a semiconductor sensors. Wide range of measurement from 0 to 4 ‰ BAC covers the needs of all common users. The device has a memory for the last 20 measurements and is equipped with a two-color display for highlighting the alarm. Thanks to the built-in rechargeable battery, you do not need to buy replacement batteries anymore. The package includes 2 spare mouthpieces and a charging USB cable.
- Alcohol Tester with Fuel Cell Sensor
- Used to View the Content of Alcohol in Blood
- Professional Pre-Calibrated Sensor
- Auto Self-Cleaning
- Digital LCD Display with Bi-Color Backlighting
- Acoustic and Optical Signalization
- Measuring Range: 0.00 - 4.00‰ BAC (Blood Alcohol Content)
- Unit: ‰ BAC



## ○ SCA BA 02 ALCOHOLTESTER

- Breath Alcohol Analyzer
- Used to View the Content of Alcohol in Breath
- Measuring Range: 0,2 - 1,5‰ (,LO") • Warning Calibration Value: > 0,2‰
- Unit: ‰ (nebo ‰ BAC nebo mg/l; optional)
- Digital LCD Display with Bicolor Backlighting
- Real Time Clock
- Temperature Indicator
- Acoustic and Video Signalization
- Auto-Self Cleaning
- Low Power Consumption
- Accessories: 3 Blowing Tubes
- Dimensions (w h d): 43 x 105 x 23 mm
- Weight: 50g (without Batteries)



## ○ SCA BA 01 V2 ALCOHOLTESTER

- Alcohol analyzer
- To show alcohol content of breath
- Measuring range: 0.1 - 4th
- Alarming value: > 0.2.
- Unit: (or‰ BAC or mg / l; optional)
- Digital LCD display with bi-colored backlight
- Simple control with just one button
- Acoustic and graphic semaphore
- automatic self-cleaning
- Low power consumption
- Accessories: 3 mouth tube
- Dimensions instrument (in h): 36x98x16 mm
- Weight of device: 27 g (without battery)



## ○ SCA BA 01 ALCOHOLTESTER

- Sencor SCA BA01
- Breath Alcohol Analyzer
- Used to View the Content of Alcohol in Breath
- Measuring Range: 0,1 - 1,5‰
- Warning Calibration Value: > 0,2‰
- Unit: ‰ (nebo ‰ BAC nebo mg/l; optional)
- Digital LCD Display with Bicolor Backlighting
- Easy One Key Operation
- Acoustic and Video Signalization
- Auto-Self Cleaning
- Low Power Consumption
- Accessories: 3 Blowing Tubes
- Dimensions (w h d): 36 x 98 x 16 mm
- Weight: 27g (without Batteries)



## ○ SCA BA 99 ○ SCA BA89 REPLACEMENT BLOWING TUBE

- Blowing tubes (3pcs)







- BT / MP3 Car FM Transmitter with QC3.0 Quick Charger
- Multi Color TFT LCD Display Screen with Diagonal 1.85" (4.7 cm)
- High Gloss Black Finish
- Support: Bluetooth, USB Flash Disk, TF Card, AUX-IN, MP3, WMA, FLAC, WAV and HandsFree
- 3 x USB Slot (1 x QC3.0 Slot for Charging, 1 x Quick Charging, 1 x Music Slot)
- QC3.0 Port for Quick Charging
- 2 x USB Charging Ports: DC 5 V / 5.4 A Max. (QC3.0 + 2.4 A)
- TF Card / Micro SD Card Slot (up to 32 GB)
- Bluetooth V4.2
- AUX-IN Jack 3.5 mm
- Wireless HandsFree
- Microphone for Calls
- Support Call Answering Through Car Stereo
- Display Mode, Volume, FM Frequency, Car Voltage, Song Names, Caller ID Function
- Equalizer Function (Normal, Classical, Pop, Rock, Jazz)
- Volume Control
- Pause, Previous / Next Control
- Memory of Last Frequency, Track Number and Volume
- Simple Switching Between BT / TF / AUX-IN / USB Audio Sources
- Voltage Meter in Car Power Supply System
- Adjustable Arm for Better Access
- Jack 3.5 mm - Jack 3.5 mm M / M Cable (Included)
- FM Frequency Transmitting Range: 87.5 - 108 MHz
- Quantity of FM Frequencies: 206
- Power: DC 12 / 24 V (Car Power Plug)
- Dimensions: (w / h / d) 52 x 79 x 180 mm
- Weight: 97 g



- BT / MP3 Car FM Transmitter with QC3.0 Quick Charger
- Exclusive Pearl Metallic Color
- Design LED Lighting
- Support: Bluetooth, USB Flash Disk, TF Card, MP3, WMA, FLAC, WAV and HandsFree
- 2 x USB Slot (1 x QC3.0 Slot for Charging, 1 x Music / Slow Charging)
- QC3.0 Port for Quick Charging
- USB Charging Ports: DC 5 V / 4 A Max. (QC3.0 + 1.0 A)
- TF Card / Micro SD Card Slot (up to 32 GB)
- Bluetooth V5.0
- Wireless HandsFree
- Microphone for Calls
- Support Call Answering Through Car Stereo
- Volume Control
- Pause, Previous / Next Control
- Memory of Last Frequency, Track Number and Volume
- Simple Switching Between BT / TF / USB Audio Sources
- Blue LED Display
- Digital Tuning and Frequency Display
- Voltage Meter in Car Power Supply System
- FM Frequency Transmitting Range: 87.5 - 108 MHz
- Quantity of FM Frequencies: 206
- Power: DC 12 V / 24 V (Car Power Plug)
- Dimensions: (w / h / d) 43 x 83 x 47 mm
- Weight: 39 g



## ○ **SWM 4545** FM MODULÁTOR

- BT / MP3 Car FM Transmitter
- Support: Bluetooth, USB Flash Disk, TF Card, MP3, WMA, FLAC, WAV and HandsFree
- 2 x USB Slot (1 for Music in MP3 Format, 1 Main for Charging)
- TF Card / Micro SD Card Slot (up to 32 GB)
- Bluetooth V4.2
- Wireless HandsFree
- USB Charging Ports: DC 5 V / 2.4 A Max.
- Microphone for Calls
- Support Call Answering Through Car Stereo
- Volume Control
- Pause, Previous / Next Control
- Memory of Last Frequency, Track Number and Volume
- Simple Switching Between BT / TF / USB Audio Sources
- Blue Non-Shining LED Display
- Digital Tuning and Frequency Display
- Voltage Meter in Car Power Supply System
- FM Frequency Transmitting Range: 87.5 - 108 MHz
- Quantity of FM Frequencies: 206
- Power: DC 12 / 24 V (Car Power Plug)
- Dimensions: (w / h / d) 47 x 80 x 40 mm
- Weight: 35 g



## ○ **SWM 3535** FM MODULÁTOR

- BT / MP3 Car FM Transmitter
- Support: Bluetooth, USB Flash Disk, TF Card, MP3, WMA, FLAC, WAV and HandsFree
- 2 x USB Slot (1 for Music in MP3 Format, 1 Main for Charging)
- TF Card / Micro SD Card Slot (up to 32 GB)
- Bluetooth V4.2
- Wireless HandsFree
- USB Charging Ports: DC 5 V / 2.4 A Max.
- Microphone for Calls
- Support Call Answering Through Car Stereo
- Volume Control
- Pause, Previous / Next Control
- Memory of Last Frequency, Track Number and Volume
- Yellow Non-Shining LED Display
- Digital Tuning and Frequency Display
- Voltage Meter in Car Power Supply System
- FM Frequency Transmitting Range: 87.5 - 108 MHz
- Quantity of FM Frequencies: 206
- Power: DC 12 / 24 V (Car Power Plug)
- Dimensions: (w / h / d) 38 x 70 x 48 mm
- Weight: 27 g



# FM MODULATORS



## ○ SWM 3500 FM MODULATOR

- BT / MP3 Car FM Transmitter
- Support: Bluetooth, USB Flash Disk, TF Card, Micro SD, MP3 and HandsFree
- 2 x USB Slot (1 for Music in MP3 Format, 1 Main for Charging)
- TF Card / Micro SD Card Slot (up to 32 GB)
- Bluetooth V2.1
- Wireless HandsFree
- USB Charging Ports: DC 5 V / 3.4 A max. (2.4 A + 1 A)
- Microphone for Calls
- Support Call Answering Through Car Stereo
- Volume Control
- Pause, Previous / Next Control
- Memory of Last Frequency, Track Number and Volume
- Simple Switching Between BT / TF / USB Audio Sources
- Red Non-Shining LED Display
- Digital Tuning and Frequency Display
- Voltage Meter in Car Power Supply System
- Adjustable Joint
- FM Frequency Transmitting Range: 87.5 - 108 MHz
- Quantity of FM Frequencies: 206
- Power: DC 12 / 24 V (Car Power Plug)
- Dimensions: (w / h / d) 56 x 95 x 43 mm
- Weight: 37 g



## ○ SWM 151 FM MODULATOR

- FM modulator
- SD/MMC/USB and audio input
- Backlight LCD display
- Image name of the file on RDS receiver
- Remote control
- 206 FM Channels
- Volume control
- Equalizer
- Pause, Previous/Next Control
- 12 V Car Power Plug
- Audio cable included




## ○ SWM 160 FM MODULATOR

- FM modulator MP3/WMA
- SD/MMC/USB and audio input
- Large backlight LCD display
- Remote control
- 206 FM channels
- Volume setting
- Equalizer
- Pause function
- Back / Forward
- Power 12 V auto connector
- Audio cable included



## ○ SWM 101 FM MODULATOR

- Car MP3 WMA Wireless FM Modulator
- USB or Audio Input
- LED Display
- Remote Control
- 199 FM Channels
- Volume Control
- Equalizer
- Pause, Previous/Next Control
- 12 V Car Power Plug
- Audio Cable Included

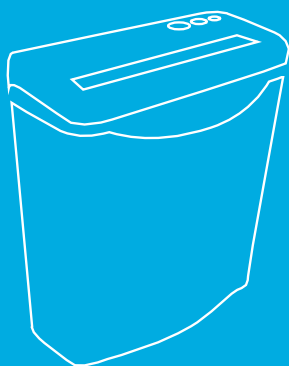

## Office >

- 86 SHREDDERS
- 87 TRIMMERS
- 88 LAMINATORS



## ○ **SSK 482**

### SHREDDER

- Paper, CD, Credit Card Shredder
- For Easy and Quick Destruction of Confidential Documents, CDs and Credit Cards
- Simple and Convenient Emptying with Pull-Out Basket (14 litres)
- Cross Cut 10 Sheets (80g/M2)
- Auto Start / Stop
- Reverse Feature
- Shred Size 5 x 16 mm
- 220 mm Entry Width
- Noise Level Less Than 70 dB
- 2 m / min Shred Speed
- Strip Cut CD/DVD into 4 Parts
- Practical 4 rollers
- Pull out waste basket
- Basket Capacity 14 l
- Power : AC 220-240 V / 300 W
- Dimensions : 344 x 210 x 445 mm
- Weight : approx. 5,4 kg



## ○ **SSK 361**

### SHREDDER

- Paper Shredder
- For Easy and Quick Destruction of Confidential Documents
- Cross Cut 6 Sheets (80g/M2)
- Auto Start / Stop / Reverse Feature
- Shred Size 4 x 38 mm
- 220 mm Entry Width
- Noise Level Less Than 70 dB
- Shred Speed 2,2 m / min
- Overheat Stop
- Basket Capacity 11 L
- Power: AC 230 V / 150 W
- Dimensions: 293 x 150 x 350 mm
- Weight: approx. 3,3 kg




## ○ **SSK 160**

### SHREDDER

- Strip Cut 6 Sheets (80g/m2)
- Auto Start / Stop / Reverse Feature
- Shred Size 6 mm strip
- 220 mm Entry Width
- Noise Level Less Than 70 dB
- 2,2 m / min Shred Speed
- Paper Bin Volume 7 l
- Compatible Basket Diameter 27,5 - 37,5 cm
- Power : 220-240 V/50 Hz; 190 W/1A
- Dimensions : 312 x 118 x 386 mm
- Weight : 1,4 kg



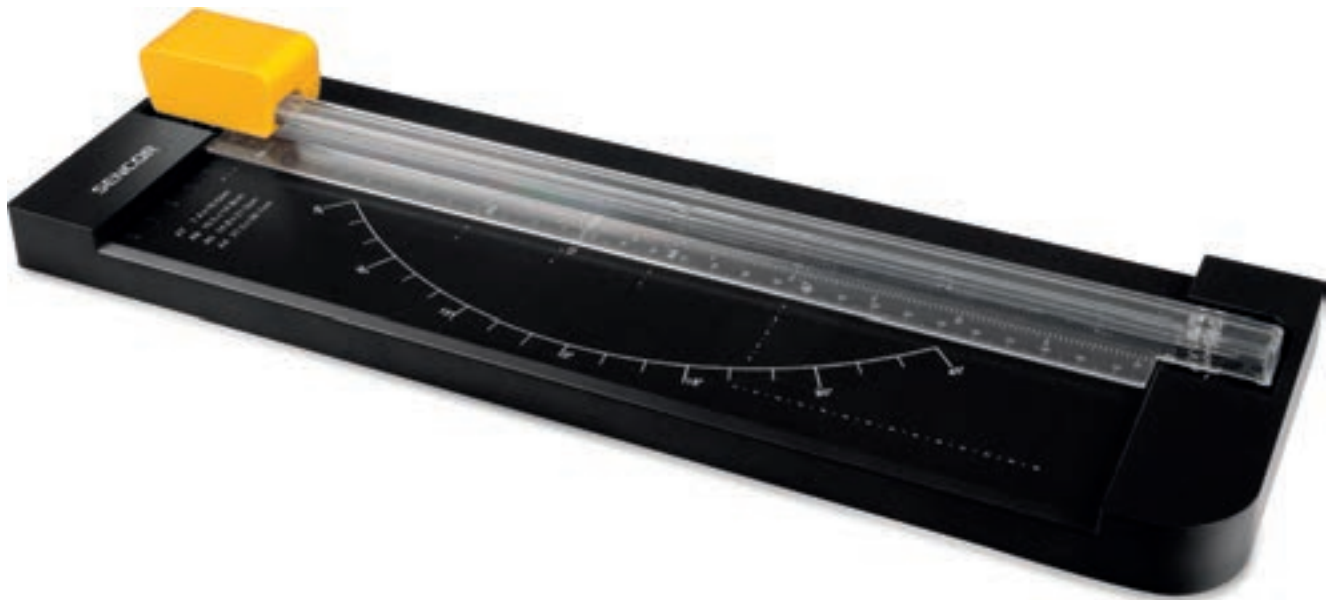

## ○ STR 210 TRIMMER

- A4 Personal Paper Trimmer
- Cutting Length 310 mm
- Includes 3 Blades Straight/Wave/Perforation
- Straight Cut 5 Sheets
- Perforation Cut 3 Sheets
- Wave Cut 3 Sheets
- Dimensions : 382 x 120 x 55 mm
- Trimmer is Ideal for: Trimming Computer Prints, Photographs, Business Cards, Labels, Posters and many More Making Your Own Cards, Crafts and Invitations
- Adult supervision required for children between the ages of 12 and 16. Not suitable for children under 12.





## ○ SLA 310 LAMINATOR

- A3 Personal Laminator
- Laminates up to A3 Size Photos and Documents
- Operates with 150-250 (2x75 - 2x125) Micron Pouches
- Fast Warm-Up 4-5 min
- Easy to Use
- Uses 50% less Energy\*
- Quiet Twin-Roller Feed Mechanism
- ABS Function - Quick Release of Jammed Pouches
- Approx 300 mm/min Laminating Speed
- For hot or cold laminating
- Dimensions : 475x164x68mm
- Weight: 1,5 kg
- \* In Comparison to Conventional Laminators

### **Ideal for Laminating:**

- Certificates
- Drawings
- Documents
- Sketches
- Computer Prints
- Invitations
- Photos
- Calendars
- Maps



## ○ SLA 301 LAMINATOR

- A3 Personal Laminator
- Laminates up to A3 Size Photos and Documents
- Operates with 150-250 (2x75 - 2x125) Micron Pouches
- Fast Warm-Up 3-4 min
- Easy to Use
- Uses 50% less Energy\*(\* In Comparison to Conventional Laminators)
- Quiet Twin-Roller Feed Mechanism
- ABS Function - Quick Release of Jammed Pouches
- Approx 250 mm/min Laminating Speed
- For hot or cold laminating
- Dimensions: 440x145x63mm
- Weight: 1,6 kg

### **Ideal for Laminating:**

- Certificates
- Drawings
- Documents
- Sketches
- Computer Prints
- Invitations
- Photos
- Calendars
- Maps



## ○ SLA 210 LAMINATOR

- A4 Personal Laminator
- Laminates up to A4 Size Photos and Documents
- Operates with 150-250 (2x75 - 2x125) Micron Pouches
- Fast Warm-Up 3-4 min
- Easy to Use
- Uses 50% less Energy\*
- Quiet Twin-Roller Feed Mechanism
- ABS Function - Quick Release of Jammed Pouches
- Approx 300 mm/min Laminating Speed
- For hot or cold laminating
- Dimensions : 330x190x57mm
- Weight: 0,83 kg
- \* In Comparison to Conventional Laminators

### **Ideal for Laminating:**

- Certificates
- Drawings
- Documents
- Sketches
- Computer Prints
- Invitations
- Photos
- Calendars
- Maps




## ○ SLA 201 LAMINATOR

- A4 Personal Laminator
- Laminates up to A4 Size Photos and Documents
- Operates with 150-250 (2x75 - 2x125) Micron Pouches
- Fast Warm-Up 3-4 min
- Easy to Use
- Uses 50% less Energy\*(\* In Comparison to Conventional Laminators)
- Quiet Twin-Roller Feed Mechanism
- ABS Function - Quick Release of Jammed Pouches
- Approx 250 mm/min Laminating Speed
- For hot or cold laminating
- Dimensions : 347x143x63mm
- Weight: 1,1 kg

### **Ideal for Laminating:**

- Certificates
- Drawings
- Documents
- Sketches
- Computer Prints
- Invitations
- Photos
- Calendars
- Maps

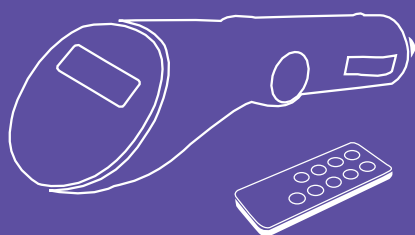

## Others >

|     |                  |
|-----|------------------|
| 90  | TIMERS           |
| 91  | CHARGERS         |
| 92  | SOCKETS          |
| 93  | MOBILE RADIOS    |
| 94  | LIGHTS           |
| 100 | CLEANING AGENTS  |
| 101 | SURGE PROTECTORS |
| 102 | GAMES            |

# TIMERS



## ○ SST 13 TIMER

- SENCOR DIGITAL TIMER
- The digital timer is used to switch the AC 230V power supply on and off in required time intervals.
- BRIEF DESCRIPTION OF FUNCTIONS
- The timer has a total of 8 ON/OFF programs.
- MANUAL ON/AUTO/MANUAL OFF modes can be used for easy control.
- 12/24 hour clock display
- Daylight saving time function.
- The random start function enables starting the appliance randomly in 10 to 32 minute intervals.
- Each configured interval (program) can be repeated on various days or groups of days



## ○ SST 12 TIMER

- MECHANICAL DAILY TIMER
- The mechanical daily timer is intended for switching appliances powered by AC
- 230 V on and off at specified time intervals. The timer can be switched on and off up to 48 times a day.
- Voltage 230 V, 50 Hz
- Maximum load 16 A, 3600 W
- Operating temperature -10°C to +40°C
- Clock accuracy +/- 5 min
- Accuracy for 30 min. +/- 5 seconds
- Accuracy for 1 hour +/- 10 seconds
- Accuracy for 6 hours +/- 1 min



## ○ SST 11 TIMER

- MECHANICAL WEEKLY TIMER
- Mechanical timer can switch on and off appliances, which are supplied by AC power of 230 V in set time intervals. The timer can switch the power on and off up to 48 times a week in two hour intervals.
- Voltage 230 V, 50 Hz
- Maximum load 16 A, 3600 W
- Operating temperature -10°C to +40°C



## ○ SST 10 TIMER

- MECHANICAL DAILY TIMER
- The mechanical daily timer is intended for switching appliances powered by
- AC 230 V on and off at specified time intervals. The timer can be switched on and off up to 48 times a day.
- Voltage 230 V, 50 Hz
- Maximum load 16 A, 3600 W
- Operating temperature -10°C to +40°C
- Clock accuracy +/- 5 min
- Accuracy for 30 min. +/- 5 seconds
- Accuracy for 1 hour +/- 10 seconds
- Accuracy for 6 hours +/- 1 min







## ○ **SPS 15** CHARGER

- Universal switching power supply unit 1500 mAh, stabilised
- Complies the newest ECO - EU directives
- Low energy consumption in standby mode
- Short-circuit protected
- Automatic overload and overheat protection
- Reversible polarity
- Output Current: max. 600 mA
- Output Voltages: 3/ 4.5/ 5/ 6/ 7.5/ 9/ 12 V
- Input: 100 - 240 V, 50/60 Hz
- 7 adapter plugs included:
- 2 jack plugs: 2.5 and 3.5 mm
- 4 DC plugs: 1.35 x 3.5/2.1 x 5.0/1.5 x 5.5/2.5 x 5.5 mm
- 1 Micro HDMI connector
- Red LED for checking function



## ○ **SPS 10** USB CHARGER

- Universal switching power supply unit 1000 mAh, stabilised
- Complies the newest ECO - EU directives
- Low energy consumption in standby mode
- Short-circuit protected
- Automatic overload and overheat protection
- Reversible polarity
- Output Current: max. 600 mA
- Output Voltages: 3/ 4.5/ 5/ 6/ 7.5/ 9/ 12 V
- Input: 100 - 240 V, 50/60 Hz
- adapter plugs included:
- 2 jack plugs: 2.5 and 3.5 mm
- 4 DC plugs: 1.35 x 3.5/2.1 x 5.0/1.5 x 5.5/2.5 x 5.5 mm
- 1 Micro HDMI connector
- Red LED for checking function



## ○ **SPS 6** USB CHARGER

- Universal switching power supply unit 600 mAh, stabilised
- Complies the newest ECO - EU directives
- Low energy consumption in standby mode
- Short-circuit protected
- Automatic overload and overheat protection
- Reversible polarity
- Output Current: max. 600 mA
- Output Voltages: 3/ 4.5/ 5/ 6/ 7.5/ 9/ 12 V
- Input: 100 - 240 V, 50/60 Hz
- 7 adapter plugs included:
- 2x jack plugs: 2.5 and 3.5 mm
- 4x DC plugs: 1.35 x 3.5/2.1 x 5.0/1.5 x 5.5/2.5 x 5.5 mm
- 1x Micro HDMI connector
- Red LED for checking function



SOCKET

-



8 km

## ○ **SMR 600** MOBILE RADIO

- Set of Two Personal Mobile Radio Transceivers
- Up to 8 km Open Field Range
- 8 Channels with 38 CTCSS Codes
- 83 DCS Codes for More Private Communication
- Rotary ON/OFF and Volume Control
- Auto Channel Scan
- 15 Selectable Call Ring Tones
- VOX Function
- Channel Monitor
- Dual Channel Watch Function
- Automatic Squelch
- Automatic Battery Save
- Roger Beep ON/OFF
- Key Lock ON/OFF
- Key Tone ON/OFF
- Large Backlight Display
- Battery Meter with Low Warning
- MIC/EAR/Charge Jack
- Content :
- 2 PMR handset
- 2 Belt Clip
- Rechargeable Battery



7 km

## ○ **SMR 130** MOBILE RADIO

- Up to 7 km Open Field Range
- 8 Channels
- Adjustable Volume Control
- Auto Channel Scan
- Call Ring Tone
- Channel Monitor
- Automatic Squelch
- Automatic Battery Save
- Roger Beep
- Key Lock ON/OFF
- Display Backlight
- Battery Meter with Low Warning
- Removable Belt Clip
- Hands free and charger jack (optional)
- Power 3x AAA Batteries (not included)



5 km

## ○ **SMR 111** MOBILE RADIO

- Personal Mobile Radio Twin Set
- Up to 5 km Open Field Range
- 8 Channels with 38 CTCSS Codes
- Carrier Frequency 446 MHz
- 0,5 W Transmission Power
- Channel Scan
- 10 Call Ring Tones
- VOX Function
- Channel Monitor
- Automatic Squelch
- Roger Beep ON/OFF
- Key Tone ON/OFF
- Key Lock Function
- Lamp
- Backlight Display
- Battery Saving Function
- Battery Meter with Low Warning
- Power 3 x AAA Alkaline Battery (not included)
- Content
- 2 PMR handset
- 2 Belt Clip





NEW

FLASHLIGHT  
for bikes

## ○ SLL 98 PŘEDNÍ NABÍJECÍ SVÍTLNA NA KOLO

- Materiál: kov, plast
- 3W LED čip
- Funkce: 100% / 50% / 30% / FLASH / 100%+RED / OFF
- Vestavěná baterie: 850mAh 3,7 V
- Typ baterií: Li-pol
- Světelný tok: 400 lm
- Doba svícení: 2-7 h
- Dosvit: 100 m
- Odolnost: IP 65
- Váha: 81 g
- Rozměry: 74 x 37 X 26 mm



NEW

FLASHLIGHT  
for bikes

## ○ SLL 97 PŘEDNÍ NABÍJECÍ SVÍTLNA NA KOLO

- Materiál: plast
- 3W LED čip
- Funkce: 100% / 50% / FLASH / OFF
- Vestavěná baterie: 2000mAh 3,7 V
- Typ baterií: Li-ion
- Světelný tok: 350 lm
- Doba svícení: 3-8 h
- Dosvit: 100 m
- Odolnost: IP 65
- Váha: 91 g
- Rozměry: 120 x 35 x 35 mm



NEW

FLASHLIGHT  
for bikes

## ○ SLL 95 LIGHT

- REAR RECHARGEABLE BICYCLE LIGHT
- 1W RED COB CHIP
- Material: aluminium, plastic
- Functions: FULL (100%,50%,30%) / FLASH (100%,50%,30%) / OFF
- Power source: 3,7 V (build-in bat)
- Type of battery: Li-pol (3,7 V; 500 mAh)
- Charging: via USB Micro B (vable incl.)
- Luminous flux: 25 lm
- Light duration: 2 h
- Range: 20 m
- Protection class: IP X4
- Weight: 34 g
- Dimensions: 62 x 30 X 27 mm



NEW

FLASHLIGHT  
for bikes

## ○ SLL 94 LIGHT

- REAR RECHARGEABLE BICYCLE LIGHT
- 1W RED COB CHIP
- Material: aluminium, plastic
- Functions: FULL (100%,50%,30%) / FLASH (100%,50%,30%) / OFF
- Power source: 3,7 V (build-in bat)
- Type of battery: Li-pol (3,7 V; 300 mAh)
- Charging: via USB Micro B (vable incl.)
- Luminous flux: 25 lm
- Light duration: 2 h
- Range: 20 m
- Protection class: IP X4
- Weight: 24 g
- Dimensions: 44 x 31 X 31 mm



NEW

FLASHLIGHT  
for bikes

## ○ SLL 93 LIGHT

- FRONT RECHARGEABLE BICYCLE LIGHT
- 1W LED COB CHIP
- Material: aluminium, plastic
- Functions: FULL (100%,50%,30%) / FLASH (100%,50%,30%) / OFF
- Power source: 3,7 V (build-in bat)
- Type of battery: Li-pol (3,7 V; 300 mAh)
- Charging: via USB Micro B (vable incl.)
- Luminous flux: 25 lm
- Light duration: 2 h
- Range: 20 m
- Protection class: IP X4
- Weight: 24 g
- Dimensions: 44 x 31 X 31 mm



NEW

FLASHLIGHT  
for bikes

## ○ SLL 92 LIGHT

- FRONT RECHARGEABLE BICYCLE LIGHT
- 3W LED CHIP
- Material: aluminium, plastic
- Function: FULL / FLASH / OFF
- Power source: 3,7 V (build-in bat)
- Type of battery: Li-pol (3,7 V; 1200 mAh)
- Luminous flux: 180 lm
- Light duration: 2 h
- Range: 100 m
- Protection class: IP X4





## ○ SLL 90 LIGHT

- The compact set of rubberized flashlights on the wheel
- These front and rear lights on your bike are ideal assistant in case you need a small, practical and easily odnimatele light primarily on the bike
- Both lights have 2 LEDs, front white light and a rear red that great serve
- Moreover, both are flashing function
- Material: plastic, silicone
- Features: FULL / FLASH / OFF
- Power supply: 6 V
- Battery Type: 2 x CR2025 (included)
- The luminous flux of 5 lm
- Burn time: 8 hours
- Afterglow: 3 m
- Resistance: IP 42
- Weight: 18 g
- Dimensions: 40 x 25 x 105 mm



## ○ SLL 88 LIGHT

- Material: plastic, rubber
- Function: 100% / 50% / OFF
- Power source: 3,7 V
- Type of battery: Li-ion 2200 mAh
- Luminous flux: 100 lm
- Light duration: 4 h (100%) / 12 h (50%)
- Range: 100 m
- Weight: 430 g
- Dimensions: 195 x 95 x 185 mm



## ○ SLL 84 LIGHT

- Rubber covered flashlight
- 3 WATT COB
- Material: ABS, rubber
- Function: ON / OFF
- Power: 4,5 V
- Battery type: 3 x AA
- Luminous flux: 120 lm
- Burn time: 7 hours
- Afterglow: 4 m
- Resistance: IP 20
- Weight: 109 g
- Dimensions: 210 x 58,5 x 30,3 mm



## ○ SLL 83 LIGHT

- 3 W - high-bright LEDs
- Material: plastic / rubber
- Function: ON / OFF
- Afterglow: 200 m
- Luminous flux: 220 lm
- Power supply: 6 V, 4 x D
- Burn time: 20 hours
- Weight: 526 g
- Dimensions: 200 x 125 x 125 mm



## ○ SLL 67 LIGHT

- Pocket Flashlight
- Material: aluminium
- Function: ON / OFF
- Power source: 6 V
- Type of battery: 4x LR41
- Luminous flux: 4 lm
- Light duration: 40 h
- Range: 15 m
- Protection class: IP 44
- Weight: 15 g
- Dimensions: 112 x 13 mm



## ○ SLL 65 LIGHT

- Light aluminium flashlight, resistant against dust and dampness. LED diode guaranteeing a sufficient light beam and a long lifetime. This lamp is the ideal helper for home and outdoor use under any weather conditions.
- METAL ALLOY 0,5 WATT
- Material: aluminium
- Function: ON / OFF
- Power source: 1,5 V
- Type of battery: 1x AA
- Luminous flux: 20 lm
- Light duration: 10 h
- Range: 20 m
- Protection class: IP 52
- Weight: 26 g
- Dimensions: 20 x 93 mm





# LIGHTS



## ○ SLL 64 LIGHT

- Quality aluminium lamp resistant against dust and dampness. 3 watt LED diode guaranteeing a very strong light beam and a long lifespan. This lamp is the ideal helper for home and outdoor use under any weather conditions.
- METAL ALLOY 3 WATT
- Material: aluminium
- Function: ON / OFF
- Power source: 1.5 V
- Type of battery: 1 x AA
- Luminous flux: 50 lm
- Light duration: 5 h
- Range: 80 m
- Protection class: IP 52
- Weight: 55 g
- Dimensions: 27 x 95 mm



## ○ SLL 60 LIGHT

- Stylish compact table lamp with 12 highly luminous LED diodes
- Flexible metal neck provides excellent handling
- Ideal for efficient lighting everywhere we cannot or do not want to use the power of the network
- 12 highly luminous LED diodes
- Afterglow: 15 m
- Luminous flux: 48 lm
- Power consumption: 4.5V, 3x AAA (R03)
- Diode lifetime : up to 100 000 h
- Lightening duration (continuous): with LR03 - 15 h



## ○ SLL 56 Professional Head Torch 3 WATT

- Top of the line head lamp with a super high-power 3W Q3 CREE LED diode
- The body is made from aluminium and durable plastic
- Handling is made easier by an adjustable joint and an adaptable head strap
- Thanks to its very low weight, it is ideal for professional and sports activities
- 3 lighting modes, 50%, 100% and warning flash



## ○ SLL 61 LIGHT

- Practical aluminium camping lamp with 16 highly luminous 5mm LED diodes
- Hanging ring for universal usage
- Ideal for garden, hiking or when blackout appears
- 16 highly luminous 5mm LED diodes
- Afterglow: 15 m
- Luminous flux: 56 lm
- Power supply: 4.5V, 3x AAA (R03)
- Lightening duration (continuous): with LR6 - 10 h



## ○ SLL 59 LIGHT

- HEAD TORCH 3 WATTS
- LED: COB
- Material: ABS
- Function: 100% / 30% / STROBO / OFF
- Power source: 4.5 V
- Type of battery: 3x AAA
- Luminous flux: 120 lm
- Light duration: 3-5 h
- Range: 5 m
- Weight: 47 g
- Dimensions: 50x36x42 mm

## ● SLL 55 WHITE ● SLL 55 GREY LIGHT



- 3 WATT HEADLAMP
- LED: CREE XPE Q3
- Material: plastic
- Functions: 3W ON 100% / 3W ON 30% / 2xRED ON 100% / 3W+2xRED ON FLASH / OFF
- Power source: 4.5 V
- Battery type: 3x AAA
- Luminous flux: up to 150 lm
- Lighting time: up to 60 h
- Lighting range: 100 m
- Protection level: IP X5
- Weight: 50 g
- Dimensions: 60 x 45 x 35 mm





## ○ SLL 53 LIGHT

- Professional head torch with 3 W super luminous CREE LED diode
- Body made from aluminium and durable plastics
- Easy manipulation with adjustable joint and head strap
- Ideal for professional usage and sport activities
- 3 lightning modes, 50%, 100% and warning light
- 3W highly luminous CREE LED diode - 3 lightning modes
- Luminous flux: 160 lm
- Power supply: 4.5V, 3× AAA (R03)
- Lightening duration (continuous): with LR03 - 3 h
- Protection: IP×2
- LED: CREE XP-E R3
- Feature: beam width regulation
- Feature: FULL / SEMI / FLASH / OFF



## ○ SLL 50 LIGHT

- Head torch with 8 highly luminous LED diodes
- The body is made of lightweight and durable plastic
- Handling facilitates adjustable joint with lock and adjustable head strap
- Ideal for lighting for short distances without using your hands
- 3 intensities of lightening 2 LED, 4 LED and full shine 8 LED
- 8 highly luminous LED diodes - 3 modes of lightening
- Resistant to moisture, impact and dust
- Afterglow: 15 m
- Luminous flux: 32 lm
- Power supply: 4.5V, 3x AAA (R03)
- Diode lifetime : up to 100 000 h
- Lightening duration (continuous): with LR03 - 20 h



## ○ SLL 49 LIGHT

- LED: 20 WATT
- Material: aluminium
- Function: beam width control
- Function: 100% / 30% / FLASH / OFF
- Type of battery: 6 x AA
- Luminous flux: 1500 lm
- Range: 500 m



## ○ SLL 48 LIGHT

- LED: 10 WATT
- Material: aluminium
- Function: beam width control
- Function: 100% / 30% / FLASH / OFF
- Type of battery: 6 x AAA
- Luminous flux: 1000 lm
- Range: 300 m



## ○ SLL 47 LIGHT

- 10 W - High-bright CREE LED
- LED: CREE XML T6
- Functions: Control the width of the beam
- Features: FULL / SEMI / OFF
- Material: Aluminum
- Beam distance: 500 m
- Luminous flux: 600 lm
- Power supply: 4.5 V, 3 C
- Burn time: 8 to 300 h
- Degree of protection: IP X4



## ○ SLL 46 LIGHT

- LED: 5 WATT
- Material: aluminium
- Function: beam width control
- Function: 100% / 30% / FLASH / OFF
- Type of battery: 3x AAA
- Luminous flux: 500 lm
- Range: 200 m





○ **SLL 45**  
LIGHT

- Top of the line professional flashlight with a very useful and practical adjustable beam width function
- The all-aluminium body and adjustable luminous flux option are ideal features for outdoor activities
- Practical clip for a strap
- Super high-power CREE 3W LED diode with a luminous flux of up to 130 lm and a lifetime of 50,000 hours delivers a lighting range of up to 200m
- 3 lighting modes, 50%, 100% and warning flash



○ **SLL 30**  
LIGHT

- Quality aluminium water and dust resistant flashlight
- 1 W highly luminous LED diode provides a very powerful beam of light and long life
- This flashlight is an ideal tool for use at home and outdoors in all weather conditions
- 1 W - high-luminance LED diode
- Resistant to moisture, impact and dust
- Afterglow: 50 m
- Luminous flux: 70 lm
- Power supply: 4.5V, 3x AAA (R03)
- Diode lifetime : up to 100 000 h
- Lightening duration (continuous): with LR03 - 4 h



○ **SLL 20**  
LIGHT

- Quality aluminium water and dust resistant flashlight
- 16 powerful LED diodes covered by protective glass provides a very powerful beam of light and long life
- This flashlight is an ideal tool for use at home and outdoors in all weather conditions
- 16 high-luminance LED diodes
- Resistant to moisture, impact and dust
- Afterglow: 40 m
- Luminous flux: 64 lm
- Power supply: 4.5V, 3x AAA (R03)
- Diode longlife: up to 100 000 h
- Lightening duration (continuous): with LR03 - 10 h



○ **SLL 19**  
LIGHT

- Practical and compact hand-held flashlight with 3W COB and 1W LED in the front. At the same time it has on its side 5 red LEDs, which serve as a warning light. An interesting addition is the magnet on the front.
- RUBBERIZED FLASHLIGHT
- Material: ABS, rubber
- Function: ON 1 W LED / ON 3 W COB / ON red flashing light / OFF
- Power supply: 4.5 V
- Battery type: 2 x AAA
- Luminous flux: 10 lm - LED / 120 lm - COB
- Lighting time: 4 h - 1W LED / 3 h - 3W COB / 6h - RED
- Illumination: 10 m - LED / 5 m - COB
- Resistance: IP 20
- Weight: 61 g
- Dimensions: 175 x 38 x 25 mm



## ○ SLL 12 LIGHT

- Quality water and dust resistant rubberised flashlight with 3 powerful LED diodes, which ensure a strong beam of light and long life
- This flashlight is an ideal tool for use at home and outdoors in all weather conditions
- 3 high-luminance LED diodes
- Resistant to moisture and dust
- Afterglow: 10 m
- Luminous flux: 15 m
- Power supply: 4.5V, 3 x D (R20)
- Diode lifetime : up to 100 000 h
- Lightening duration (continuous): with LR20 - 90 h.



## ○ SLL 11 LIGHT

- Quality water and dust resistant rubberised flashlight with 3 powerful LED diodes, which ensure a strong beam of light and long life
- This flashlight is an ideal tool for use at home and outdoors in all weather conditions
- 3 high-luminance LED diodes
- Resistant to moisture and dust
- Afterglow: 15 m
- Luminous flux: 15 m
- Power supply: 3 V, 2 x D (R20)
- Diode lifetime : up to 100 000 h
- Lightening duration (continuous): with LR20 - 60 h.



## ○ SLL 10 LIGHT

- Fully rubber lined lamp with 3 powerful LED diodes, which guarantee a strong light beam and a long lifetime
- This dust and dampness resistant lamp is the ideal helper for home and outdoor use under any weather condition.
- RUBBER LINED LAMP
- Material: plastic, rubber
- Function: ON / OFF
- Power source: 3 V
- Type of battery: 2 x AA
- Luminous flux: 15 lm
- Light duration: 20 h
- Range: 10 m
- Protection class: IP 62
- Weight: 63.5 g
- Dimensions: 40 x 142 mm



# CLEANING AGENTS



## ○ SCL 2500 CLEANING AGENT

- DISPLAY BOX, 2 in 1 – Cleaning solution+ microfiber cloth
- Cleaning solution (100 ML) + microfiber cloth (15X15 mm)
- Cleaning solution immediately removes smears, fingerprints and dust.
- Appropriate for: CD/DVD discs, LCD/Plasma TV, PDA/MDA displays, notebooks, cameras, glasses , etc....
- Display box contains : 12x sets of cleaning solution and microfiber cloth



## ○ SCL 2200 CLEANING AGENT

- 4 in 1 – Cleaning cloth + antistatic brush + cleaning solution (60ml) + textile bag for easy storage
- Cleaning microfiber cloth 20x20 cm perfectly removes grease and dust.
- Cleaning solution immediately removes smears, fingerprints and dust - 60ml.
- Soft cleaning brush simply removes dust and smears from the monitor, keyboard without scratching the surface.
- Appropriate for: CD/DVD discs, LCD/Plasma TV, CRT TV, PDA/MDA displays, notebooks, cameras, etc..
- Package contains: Cleaning solution (200ml)+ microfiber cloth + cleaning brush + textile bag



## ○ SCL 2100 CLEANING AGENT

- 3 in 1 - Cleaning solution (200ml) + micro fibre cloth + cleaning brush
- Cleaning solution immediately removes smears, fingerprints and dust - 200ml.
- Soft cleaning brush simply removes dust and smears from the monitor, keyboard without scratching the surface.
- Cleaning microfiber cloth 30x30 cm perfectly removes grease and dust.
- Appropriate for: CD/DVD discs, LCD/Plasma TV, CRT TV, PDA/MDA displays, notebooks, cameras, etc...
- Package contains: Cleaning solution (200ml) + microfiber cloth + cleaning brush



## ○ SCL 2000 CLEANING AGENT

- 2 in 1 – Cleaning solution (100ml) + microfiber cloth 18x11 cm
- Cleaning solution (100ml) + microfiber cloth 18x11 cm
- Cleaning solution immediately removes smears, fingerprints and dust - 100ml.
- Appropriate for: CD/DVD discs, LCD/Plasma TV, PDA/MDA displays, notebooks, cameras, glasses , etc....
- Package contains: Cleaning solution (100ml) + microfiber cloth





## ○ **SSP 850** SURGE PROTECTOR

- Overvoltage protection
- 8x socket
- Overall absorption: 1836 Joules
- 16 A / 250 V (max.2300 W / 230 V)
- EMI and RFI noise filter
- Protection of coax. cable (IEC)
- Protection for telephone and network cable (RJ11 / RJ45)
- Child safety
- 1.5 m



## ○ **SSP 560** SURGE PROTECTOR

- Overvoltage protection
- 5x socket
- Overall absorption: 306 Joules
- 16 A / 250 V (max.3680 W / 230 V)
- USB Charger (5 V / 2.1 A max.)
- Child safety
- 1.5 m



## ○ **SSP 530** SURGE PROTECTOR

- Overvoltage protection
- 5x socket
- Overall absorption: 918 Joules
- 16 A / 250 V (max.2300 W / 230 V)
- EMI and RFI noise filter
- Protection of coax. cable (IEC)
- Child safety
- 1.5 m



## ○ **SSP 520** SURGE PROTECTOR

**NEW**

- Overvoltage protection
- 5x socket
- Overall absorption: 306 Joules
- 16 A / 250 V (max.2300 W / 230 V)
- Child safety
- 1 m



## ○ **SSP 140** SURGE PROTECTOR

- Overvoltage protection
- Overall absorption: 306 Joules
- 16A / 250 V (max.3680 W / 230 V)
- USB Charger (5 V / 2.1 A max.)
- Child safety



## ○ **SSP 110** SURGE PROTECTOR


- Overvoltage protection
- Overall absorption: 918 Joules
- 16A / 250 V (max.3680 W / 230 V)
- EMI and RFI noise filter
- Protection of coax. cable (IEC)
- Child safety



- Tetris electronic game pad
- 16 in 1 games
- „magic diamond
- fill blank shooting
- intelligent plate
- invader
- clever frog
- smart cargator
- shooter
- greedy snake
- tetris
- running tetris
- black and white inversion tetris
- heighten tetris
- tetris combinations“
- durable plastic keys
- large easy to read display
- pause key
- score count
- multiple level
- multiple speed
- sound level adjustable
- save power function
- power : 2 x aa battery
- dimmensions: 176x75x18 mm



# SENCOR®



## Bluetooth Speaker with IPX6

SIRIUS SSS 6400N **BLACK**



Waterproof IPX6



360° Sound




Wireless Stereo



[www.sencor.eu](http://www.sencor.eu)



# POWER EXTENSION

|                                                                                     | MODEL  | LENGTH | NUMBER OF OUTLETS | SWITCH | SAP      | EAN           |
|-------------------------------------------------------------------------------------|--------|--------|-------------------|--------|----------|---------------|
|    | SPC 1  | 1,5 m  | 3                 | ×      | 35030701 | 8590669089505 |
|                                                                                     | SPC 2  | 2 m    | 3                 | ×      | 35030702 | 8590669089512 |
|                                                                                     | SPC 3  | 3 m    | 3                 | ×      | 35030703 | 8590669089529 |
|                                                                                     | SPC 4  | 5 m    | 3                 | ×      | 35030704 | 8590669089536 |
|                                                                                     | SPC 5  | 7 m    | 3                 | ×      | 35030705 | 8590669089543 |
|    | SPC 6  | 1,5 m  | 4                 | ×      | 35030706 | 8590669089550 |
|                                                                                     | SPC 7  | 2 m    | 4                 | ×      | 35030707 | 8590669089567 |
|                                                                                     | SPC 8  | 3 m    | 4                 | ×      | 35030708 | 8590669089574 |
|                                                                                     | SPC 9  | 5 m    | 4                 | ×      | 35030709 | 8590669089581 |
|                                                                                     | SPC 10 | 7 m    | 4                 | ×      | 35030710 | 8590669089598 |
|   | SPC 11 | 1,5 m  | 5                 | ×      | 35030711 | 8590669089604 |
|                                                                                     | SPC 12 | 2 m    | 5                 | ×      | 35030712 | 8590669089611 |
|                                                                                     | SPC 13 | 3 m    | 5                 | ×      | 35030713 | 8590669089628 |
|                                                                                     | SPC 14 | 5 m    | 5                 | ×      | 35030714 | 8590669089635 |
|  | SPC 15 | 2 m    | 6                 | ×      | 35030715 | 8590669089642 |
|                                                                                     | SPC 16 | 3 m    | 6                 | ×      | 35030716 | 8590669089659 |
|                                                                                     | SPC 17 | 5 m    | 6                 | ×      | 35030717 | 8590669089666 |
|  | SPC 18 | 1,5 m  | 3                 | •      | 35030718 | 8590669089673 |
|                                                                                     | SPC 19 | 2 m    | 3                 | •      | 35030719 | 8590669089680 |
|                                                                                     | SPC 20 | 3 m    | 3                 | •      | 35030720 | 8590669089697 |
|                                                                                     | SPC 21 | 5 m    | 3                 | •      | 35030721 | 8590669089703 |
|                                                                                     | SPC 22 | 7 m    | 3                 | •      | 35030722 | 8590669089710 |
|  | SPC 23 | 1,5 m  | 4                 | •      | 35030723 | 8590669089727 |
|                                                                                     | SPC 24 | 2 m    | 4                 | •      | 35030724 | 8590669089734 |
|                                                                                     | SPC 25 | 3 m    | 4                 | •      | 35030725 | 8590669089741 |
|                                                                                     | SPC 26 | 5 m    | 4                 | •      | 35030726 | 8590669089758 |
|                                                                                     | SPC 27 | 7 m    | 4                 | •      | 35030727 | 8590669089765 |
|  | SPC 28 | 1,5 m  | 5                 | •      | 35030728 | 8590669089772 |
|                                                                                     | SPC 29 | 2 m    | 5                 | •      | 35030729 | 8590669089789 |
|                                                                                     | SPC 30 | 3 m    | 5                 | •      | 35030730 | 8590669089796 |
|                                                                                     | SPC 31 | 5 m    | 5                 | •      | 35030731 | 8590669089802 |
|  | SPC 32 | 2 m    | 6                 | •      | 35030732 | 8590669089819 |
|                                                                                     | SPC 33 | 3 m    | 6                 | •      | 35030733 | 8590669089826 |
|                                                                                     | SPC 34 | 5 m    | 6                 | •      | 35030734 | 8590669089833 |
|  | SPC 36 | 1,5 m  | 7                 | •      | 50001244 | 8590669138968 |
|                                                                                     | SPC 37 | 3 m    | 6                 | •      | 50001245 | 8590669138975 |

Diameter wires at all power extension cords is 3 × 1 mm.

# IN MANY VERSIONS



| MODEL   | LENGTH | NUMBER OF OUTLETS | SWITCH | SAP      | EAN           |
|---------|--------|-------------------|--------|----------|---------------|
| SPC 1B  | 1,5 m  | 3                 | ×      | 50001988 | 8590669192397 |
| SPC 3B  | 3 m    | 3                 | ×      | 50001989 | 8590669198375 |
| SPC 18B | 1,5 m  | 3                 | ano    | 50001990 | 8590669192403 |
| SPC 20B | 3 m    | 3                 | ano    | 50002221 | 8590669192373 |
| SPC 21B | 5 m    | 3                 | ano    | 50002222 | 8590669192380 |



| MODEL  | LENGTH | NUMBER OF OUTLETS | WIRE DIAMETERS | SAP      | EAN           |
|--------|--------|-------------------|----------------|----------|---------------|
| SPC 40 | 1,5 m  | 1                 | 1 mm           | 35033595 | 8590669094783 |
| SPC 41 | 2 m    | 1                 | 1 mm           | 35033596 | 8590669094790 |
| SPC 42 | 3 m    | 1                 | 1 mm           | 35033597 | 8590669094806 |
| SPC 43 | 5 m    | 1                 | 1 mm           | 35033598 | 8590669094813 |
| SPC 44 | 7 m    | 1                 | 1 mm           | 35033599 | 8590669094820 |
| SPC 45 | 10 m   | 1                 | 1 mm           | 35033600 | 8590669094837 |



|        |      |   |        |          |               |
|--------|------|---|--------|----------|---------------|
| SPC 46 | 20 m | 1 | 1,5 mm | 35033611 | 8590669094844 |
| SPC 47 | 30 m | 1 | 1,5 mm | 35033612 | 8590669094851 |



|        |      |   |        |          |               |
|--------|------|---|--------|----------|---------------|
| SPC 50 | 25 m | 4 | 1,5 mm | 35033613 | 8590669094868 |
| SPC 51 | 50 m | 4 | 1,5 mm | 35033614 | 8590669094875 |



|        |      |   |        |          |               |
|--------|------|---|--------|----------|---------------|
| SPC 52 | 25 m | 1 | 1,5 mm | 35042761 | 8590669132782 |
| SPC 53 | 50 m | 1 | 1,5 mm | 35042762 | 8590669132799 |



|        |   |   |   |          |               |
|--------|---|---|---|----------|---------------|
| SPC 60 | × | 3 | × | 35033615 | 8590669094882 |
| SPC 61 | × | 4 | × | 35033616 | 8590669094899 |



|        |   |   |   |          |               |
|--------|---|---|---|----------|---------------|
| SPC 62 | × | 3 | × | 35033617 | 8590669094905 |
| SPC 63 | × | 3 | × | 35033618 | 8590669094912 |



|        |   |   |   |          |               |
|--------|---|---|---|----------|---------------|
| SPC 64 | × | × | × | 35033619 | 8590669094929 |
| SPC 65 | × | × | × | 35033620 | 8590669094936 |





**SAV 199-008**  
**SAV 199-015**  
**SAV 199-025**  
**SAV 199-050**  
**SAV 199-100**



- 35040928 (0,8 m)
- 35040929 (1,5 m)
- 35040930 (2,5 m)
- 35040931 (5 m)
- 35040932 (10 m)
- package: blister
- antenna coaxial cable, M 9,5 mm/F 9,5 mm, fully shielded, gold 24K, ferrie cores

**SAV 165-015**  
**SAV 165-025**  
**SAV 165-050**



- 35033621 (1,5 m)
- 35039900 (2,5 m)
- 35039911 (5 m)
- package: blister
- HDMI 19pin, plug/M – plug/M, gold, V1.4

**SAV 167-015W**  
**SAV 167-025W**



- 35042685 (1,5m)
- 35042686 (2,5m)
- package: blister
- HDMI 19pin, plug/M – plug/M, gold, V1.4, white color

**SAV 173-015**



- 35043755 (1,5m)
- package: blister
- HDMI A/M – D/M (micro), V1.4

**SAV 174-015**



- 35040933
- lenght: 1,5 m
- package: blister
- HDMI A/M – C/M mini V1.4

**SAV 176-015**



- 35040935
- lenght: 1,5 m
- package: blister
- HDMI A/M – A/M 90° V1.4

**SAV 177-015**



- 35040936
- lenght: 1,5 m
- package: blister
- HDMI A/M – A/M FLAT V1.4

**SAV 178-015**



- 35042159
- lenght: 1,5 m
- package: blister
- HDMI 19pin
- plug A/M – A/M, gold plated, flat cable, plugs – 360°, V1.4

| MODEL        | SAP      | LENGTH | PACKAGE     | CATEGORY/DESCRIPTION                                      |
|--------------|----------|--------|-------------|-----------------------------------------------------------|
| SAV 115-008  | 35020207 | 0,8 m  | blister     | Optical fiber cable, Toslink plug – gold plated, ø 5 mm   |
| SAV 115-015  | 35020208 | 1,5 m  | blister     | Optical fiber cable, Toslink plug – gold plated, ø 5 mm   |
| SAV 166-015  | 35039913 | 1,5 m  | blister     | HDMI 19pin, plug A/M – plug A/M, gold plated, V1.4        |
| SAV 166-025  | 35039914 | 2,5 m  | blister     | HDMI 19pin, plug A/M – plug A/M, gold plated, V1.4        |
| SAV 166-050  | 35039915 | 5,0 m  | blister     | HDMI 19pin, plug A/M – plug A/M, gold plated, V1.4        |
| SAV 113-008  | 35020201 | 0,8 m  | blister     | SCART plug – SCART plug, 21-pin., composite cable, shield |
| SAV 113-015  | 35020202 | 1,5 m  | blister     | SCART plug – SCART plug, 21-pin., composite cable, shield |
| SAV 113-025  | 35020203 | 2,5 m  | blister     | SCART plug – SCART plug, 21-pin., composite cable, shield |
| SAV 113-050  | 35020204 | 5,0 m  | blister     | SCART plug – SCART plug, 21-pin., composite cable, shield |
| SAV 163 015  | 35029272 | 1,5 m  | blister     | SCART plug – 3 × cinch/RCA plugs, with switch             |
| SAV 151-000  | 35024317 |        | tag         | SCART /M – 3RCA /M + S-video, with switch                 |
| SAV 134-000  | 35020228 |        | tag         | SCART plug – 3 × SCART jack, miniature size, 98×56×24 mm  |
| SAV 120-000  | 35020213 |        | tag         | Cinch/RCA plug – Cinch/RCA plug                           |
| SAV 102-008  | 35020165 | 0,8 m  | tag         | 2 × cinch/RCA plugs – 2 × cinch/RCA plug                  |
| SAV 102-015  | 35020166 | 1,5 m  | tag         | 2 × cinch/RCA plugs – 2 × cinch/RCA plug                  |
| SAV 102-025  | 35020167 | 2,5 m  | tag         | 2 × cinch/RCA plugs – 2 × cinch/RCA plug                  |
| SAV 107-015  | 35020178 | 1,5 m  | tag         | 3 × cinch/RCA plugs – 3 × cinch/RCA plug                  |
| SAV 117-000  | 35020210 |        | tag         | 6,35 mm stereo jack – 3,5 mm stereo jack                  |
| SAV 121-000  | 35020215 |        | tag         | 3,5 mm stereo jack – 2 × 3,5 mm stereo jacks              |
| SAV 149-000  | 35022803 |        | tag         | Adapter 2,5mm stereo jack/M – 3,5mm stereo jack /F        |
| SAV 118-000  | 35020211 |        | tag         | 3,5 mm stereo jack – 2 × cinch/RCA socket                 |
| SAV 104-020  | 35020171 | 2,0 m  | tag         | 3,5 mm stereo jack – 2 × cinch/RCA plug                   |
| SAV 104-050  | 35020172 | 5,0 m  | tag         | 3,5 mm stereo jack – 2 × cinch/RCA plug                   |
| SAV 105-008  | 35020173 | 0,8 m  | tag         | 3,5 mm stereo jack – 3,5 mm stereo jack                   |
| SAV 105-015  | 35020174 | 3 m    | tag         | 3,5 mm stereo jack – 3,5 mm stereo jack                   |
| SAV 105-030  | 35040926 | 1,5 m  | tag         | 3,5 mm stereo jack – 3,5 mm stereo jack                   |
| SAV 106-025  | 35020175 | 2,5 m  | tag         | 3,5 mm stereo jack – 3,5 mm stereo jack                   |
| SAV 106-050  | 35020176 | 5,0 m  | tag         | 3,5 mm stereo jack – 3,5 mm stereo jack                   |
| SAV 2075-100 | 35042684 | 100 m  | spool       | Speaker cable 2 × 0,75 mm²                                |
| SCO 560-010  | 45010199 | 1,0 m  | plastic bag | Patch kabel UTP RJ45- RJ45 CAT5e                          |
| SCO 560-020  | 45010207 | 2,0 m  | plastic bag | Patch kabel UTP RJ45- RJ45 CAT5e                          |
| SCO 560-030  | 45010201 | 3,0 m  | plastic bag | Patch kabel UTP RJ45- RJ45 CAT5e                          |
| SCO 560-050  | 45010202 | 5,0 m  | plastic bag | Patch kabel UTP RJ45- RJ45 CAT5e                          |
| SCO 560-075  | 45010203 | 7,5 m  | plastic bag | Patch kabel UTP RJ45- RJ45 CAT5e                          |
| SCO 560-100  | 45010204 | 10 m   | plastic bag | Patch kabel UTP RJ45- RJ45 CAT5e                          |
| SCO 560-150  | 45010205 | 15 m   | plastic bag | Patch kabel UTP RJ45- RJ45 CAT5e                          |
| SCO 560-200  | 45010206 | 20 m   | plastic bag | Patch kabel UTP RJ45- RJ45 CAT5e                          |



## SCO 512-010 BLUE

- 45010994
- USB A/M-Micro B

## SCO 512-010 GREEN

- 45010993
- USB A/M-Micro

## SCO 512-010 PINK

- 45010995
- USB A/M-Micro B

## SCO 512-010 WHITE

- 45010992
- USB A/M-Micro B

1 m



## SCO 522-015 BK

- 45013053
- USB A/M-Micro B/C

## SCO 522-015 WH

- 45013054
- USB A/M-Micro B/C

1,5 m



## SCO 520-015 BK

- 45013051
- USB 3.1 A/M-C

## SCO 520-015 WH

- 45013052
- USB 3.1 A/M-C

1,5 m

| MODEL        | SAP      | LENGTH | PACKAGE | CATEGORY/DESCRIPTION                                                                      |
|--------------|----------|--------|---------|-------------------------------------------------------------------------------------------|
| SAV 109-008B | 35020181 | 0,8 m  | tag     | Antenna coaxial cable, fully shielded, plug - socket                                      |
| SAV 109-008W | 35020182 | 0,8 m  | tag     | Antenna coaxial cable, fully shielded, plug - socket                                      |
| SAV 109-015B | 35020183 | 1,5 m  | tag     | Antenna coaxial cable, fully shielded, plug - socket                                      |
| SAV 109-015W | 35020184 | 1,5 m  | tag     | Antenna coaxial cable, fully shielded, plug - socket                                      |
| SAV 109-025B | 35020185 | 2,5 m  | tag     | Antenna coaxial cable, fully shielded, plug - socket                                      |
| SAV 109-025W | 35020186 | 2,5 m  | tag     | Antenna coaxial cable, fully shielded, plug - socket                                      |
| SAV 109-050B | 35020187 | 5,0 m  | tag     | Antenna coaxial cable, fully shielded, plug - socket                                      |
| SAV 109-050W | 35020188 | 5,0 m  | tag     | Antenna coaxial cable, fully shielded, plug - socket                                      |
| SAV 109-075B | 35020189 | 7,5 m  | tag     | Antenna coaxial cable, fully shielded, plug - socket                                      |
| SAV 109-075W | 35020190 | 7,5 m  | tag     | Antenna coaxial cable, fully shielded, plug - socket                                      |
| SAV 109-100B | 35020191 | 10,0 m | tag     | Antenna coaxial cable, fully shielded, plug - socket                                      |
| SAV 109-100W | 35020192 | 10,0 m | tag     | Antenna coaxial cable, fully shielded, plug - socket                                      |
| SAV 109-150B | 35039658 | 15,0 m | tag     | Antenna coaxial cable, fully shielded, plug - socket                                      |
| SAV 109-150W | 35039659 | 15,0 m | tag     | Antenna coaxial cable, fully shielded, plug - socket                                      |
| SAV 169-008W | 35039660 | 0,8 m  | tag     | Antenna coaxial cable, fully shielded, plug - socket 90°                                  |
| SAV 169-015W | 35039751 | 1,5 m  | tag     | Antenna coaxial cable, fully shielded, plug - socket 90°                                  |
| SAV 169-025W | 35039752 | 2,5 m  | tag     | Antenna coaxial cable, fully shielded, plug - socket 90°                                  |
| SAV 169-050W | 35039753 | 5,0 m  | tag     | Antenna coaxial cable, fully shielded, plug - socket 90°                                  |
| SAV 169-075W | 35039754 | 7,5 m  | tag     | Antenna coaxial cable, fully shielded, plug - socket 90°                                  |
| SAV 169-100W | 35039755 | 10,0 m | tag     | Antenna coaxial cable, fully shielded, plug - socket 90°                                  |
| SAV 169-150W | 35039756 | 15,0 m | tag     | Antenna coaxial cable, fully shielded, plug - socket 90°                                  |
| SAV 124-000  | 35020218 |        | tag     | TV Coaxial adaptor 1x M - 2x F, nickel                                                    |
| SAV 125-000  | 35020219 |        | tag     | TV Coaxial adaptor 2x M - 1x F, nickel                                                    |
| SAV 126-000  | 35020220 |        | tag     | TV coaxial connector - Male, white PVC, nickel                                            |
| SAV 127-000  | 35020221 |        | tag     | TV coaxial connector - Female, white PVC, nickel                                          |
| SAV 128-000  | 35020222 |        | tag     | TV coaxial connector - Female, white PVC, nickel                                          |
| SAV 129-000  | 35020223 |        | tag     | TV coaxial connector - Male, white PVC, nickel                                            |
| SAV 132-000  | 35020226 |        | tag     | F-type screw connetor, nickel                                                             |
| SAV 6059-100 | 35043254 | 100 m  | box     | Coax cable RG-59 Cu, OD: 6,0mm, 75 Ohm, 100m                                              |
| SAV 6906-100 | 35043253 | 100 m  | box     | Coax cable RG-6 Cu, OD: 6,9mm, 75 Ohm, 100m                                               |
| SCO 501-015  | 35020252 | 1,5 m  | tag     | USB cable - USB 2.0 A cable - USB Mini 5-pin.                                             |
| SCO 509-015  | 35029276 | 1,5 m  | tag     | USB cable - USB 2.0 A connector - USB 2.0 A connector, connecting cable                   |
| SCO 510-015  | 35029277 | 1,5 m  | tag     | USB cable - USB 2.0 A connector - USB 2.0 A connector, prolongation cable                 |
| SCO 511-015  | 35029278 | 1,5 m  | tag     | USB cable - USB 2.0 A connector - USB 2.0 B connector, suitable for printer, external HDD |
| SCO 511-030  | 35039757 | 3,0 m  | tag     | USB cable - USB 2.0 A connector - USB 2.0 B connector, suitable for printer, external HDD |
| SCO 512-002  | 45009402 | 0,2 m  | tag     | USB cable - USB 2.0 A connector - USB 2.0 B Micro connector                               |
| SCO 512-008  | 45009403 | 0,8 m  | tag     | USB cable - USB 2.0 A connector - USB 2.0 B Micro connector                               |
| SCO 512-015  | 35039758 | 1,5 m  | tag     | USB cable - USB 2.0 A connector - USB 2.0 B Micro connector                               |
| SCO 513-001  | 35042687 | 15 cm  | tag     | USB cable - USB 2.0 A/F connector - USB 2.0 Micro B/M, OTG                                |
| SCO 530-015  | 35039759 | 1,5 m  | tag     | USB cable - USB 3.0 A connector - USB 3.0 A conector                                      |
| SCO 531-015  | 35039760 | 1,5 m  | tag     | USB cable - USB 3.0 A connector - USB 3.0 B connector, suitable for printer, external HDD |
| SCO 531-030  | 35039761 | 3,0 m  | tag     | USB cable - USB 3.0 A connector - USB 3.0 B connector, suitable for printer, external HDD |
| SCO 532-015  | 35039762 | 1,5 m  | tag     | USB cable - USB 3.0 A connector - USB 3.0 B micro conector                                |
| SCO 505-015  | 35039912 | 1,5 m  | tag     | VGA/SVGA cable, 15p M - 15p M, ø 8 mm, 2 ferits                                           |
| SCO 505-030  | 35025501 | 3,0 m  | tag     | VGA/SVGA cable, 15p M - 15p M, ø 8 mm, 2 ferits                                           |
| SCO 505-050  | 35025502 | 5,0 m  | tag     | VGA/SVGA cable, 15p M - 15p M, ø 8 mm, 2 ferits                                           |



# SENCOR®



## **Boombox | SPT 5800**

with CD, BT, MP3, USB,  
AUX and FM Radio

**7 Disco Led** Light Modes

**25 W RMS** Output Power



[www.sencor.eu](http://www.sencor.eu)





**SENCOR**

FAST ČR a. s., Černokostelecká 1621, 251 01 Říčany, Czech Republic  
[www.sencor.eu](http://www.sencor.eu)