SENCOR

SPRING 2018

CONSUMER ELECTRONICS

©2018 Sencor
All rights reserved.
Devices in this catalogue can be changed without prior notice, due to the technical innovations, color modifications and stock availabilities in each country.
Some devices can be intended only for certain markets.

CONTENTS

CONSUMER ELECTRONICS

Television

3 UHD SMART
6 UHD
8 FULL HD
12 HD READY

TV accessories

22 SET-TOP-BOXES
23 ANTENNAS

Mobile phones and tablets

29 SMART
30 CLASSIC
33 CLAMSHELL
34 TABLETS
35 ACCESSORIES

Home multimedia

39 MULTIMEDIA CENTRES
40 TABLE DVD
41 PORTABLE DVD
44 PORTABLE TV

Audio

47 BLUETOOTH REPRODUCTORS
51 AUDIO SYSTEMS
54 MICROSYSTEMS
56 TURNTABLES
59 INTERNET RADIOS
60 CD PLAYERS
66 PORTABLE RADIOS
69 RADIO CLOCKS
71 MP3 PLAYERS
73 EARPHONES/HEADPHONES
76 MICROPHONES

Cameras

78 ACTION CAMERAS
82 ACCESSORIES

House

84 WEATHER STATIONS
92 CLOCKS
96 TABLE LAMPS
97 WIRELESS DOORBELLS
98 DIGITAL PHOTOFRAMES

Car accessories

101 CAR RADIOS
105 SUBWOOFERS
106 SPEAKERS
107 FM MODULATORS
108 CAR CAMERAS
109 PARKING SYSTEMS
110 CAR CONVERTERS AND CHARGERS
111 ALCOHOL TESTERS
112 COVERS

Office

114 SHREDDERS
116 TRIMMERS
117 LAMINATORS
118 LAMINATED FOILS

Others

121 TIMERS
122 USB CHARGERS
123 SOCKETS
124 MOBILE RADIOS
125 LIGHTS
129 CLEANING AGENTS
130 SURGE PROTECTORS
132 GAMES

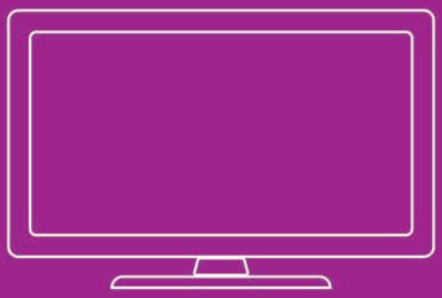

Televisions

3 UHD SMART
6 UHD
8 FULL HD
12 HD READY

USB REC TIMESHIFT DVB-T/T2/C/S2 Smart UHD LED

SLE 55US400TCS

UHD SMART TELEVISON

- **Picture:**
- Panel Size 139 cm (55")
- UHD
- 3840 x 2160 Pixel Resolution
- D-LED
- Brightness 250cd/m²
- Response Time 8ms
- Wide Viewing Angle 178°/178°
- Digital Comb Filter (DCF)
- Dynamic Noise Reduction Circuits (DNR)
- SMART Interface:
- SMART TV Interface
- HbbTV (Hybrid Broadcast Broadband TV)
- Wi-Fi Built in Modul
- DLNA Support
- **Signal Reception:**
- DVB-T2 (H.265, max. 3840 x 2160/60p)
- DVB-T
- DVB-C
- DVB-S2 (H.265, max. 3840 × 2160/60p, Skylink FastScan Tunning)
- PAL/SECAM BG/DK/I/L/L'
- **Sound:**
- Output Power 2 × 8W
- Equalizer
- **Inputs and outputs:**
- 3x HDMI, SCART, Mini AV in, Mini YPbPr, RJ45, Coaxial, Optical, 2x USB 2.0 (5V 0.5A), Headphone Jack
- CI+ interface
- **Supported formats:**
- Video: MKV, AVI, MP4, MOV, XviD
- Audio: MP3, AAC, WAV
- Photo: JPEG, JPG
- Text: TXT
- **Other:**
- Recording to USB Drive (PVR - TS format) / Playback from USB Drive
- Timeshift
- OSD: EN, CZE, POL, HUN, SVK, GER, FRE, ITA, SPA, GRC, HRV, SRP, BUL, SLV, LIT, RUS, DUT
- Electronic Programme Guide (EPG)
- Teletext
- Clock, Timer
- Parental Lock
- Hotel Mode
- Power, Consumption and Dimensions:
- **Power:** AC 100-240V 50/60Hz
- Energy Efficiency: 108W / <0.5W in standby mode
- Dimensions with Stand: 1234x310x766mm
- Dimensions without Stand: 1234x90x711mm
- **Weight:** 14.2kg
- VESA: 200 x 200

LED UHD Smart DVB-T/T2/C/S2 TIMESHIFT USB REC

SLE 50US400TCS

UHD SMART TELEVISON

- **Picture:**
- Panel Size 127 cm (50")
- UHD
- 3840 x 2160 Pixel Resolution
- D-LED
- Brightness 250cd/m²
- Response Time 8ms
- Wide Viewing Angle 178°/178°
- Digital Comb Filter (DCF)
- Dynamic Noise Reduction Circuits (DNR)
- SMART Interface:
- SMART TV Interface
- HbbTV (Hybrid Broadcast Broadband TV)
- Wi-Fi Built in Modul
- DLNA Support
- **Signal Reception:**
- DVB-T2 (H.265, max. 3840 x 2160/60p)
- DVB-T
- DVB-C
- DVB-S2 (H.265, max. 3840 × 2160/60p, Skylink FastScan Tunning)
- PAL/SECAM BG/DK/I/L/L'
- **Sound:**
- Output Power 2 × 8W
- Equalizer
- **Inputs and outputs:**
- 3x HDMI, SCART, Mini AV in, Mini YPbPr, RJ45, Coaxial, Optical, 2x USB 2.0 (5V 0.5A), Headphone Jack
- CI+ interface
- **Supported formats:**
- Video: MKV, AVI, MP4, MOV, XviD
- Audio: MP3, AAC, WAV
- Photo: JPEG, JPG
- Text: TXT
- **Other:**
- Recording to USB Drive (PVR - TS format) / Playback from USB Drive
- Timeshift
- OSD: EN, CZE, POL, HUN, SVK, GER, FRE, ITA, SPA, GRC, HRV, SRP, BUL, SLV, LIT, RUS, DUT
- Electronic Programme Guide (EPG)
- Teletext
- Clock, Timer
- Parental Lock
- Hotel Mode
- Power, Consumption and Dimensions:
- **Power:** AC 100-240V 50/60Hz
- Energy Efficiency: 93W / <0.5W in standby mode
- Dimensions with Stand: 1124x236x692mm
- Dimensions without Stand: 1124x92x648mm
- **Weight:** 11.6kg
- VESA: 200 x 200

USB REC TIMESHIFT DVB-T/T2/C/S2 Smart UHD LED

SLE 43US400TCS

UHD SMART TELEVISON

- **Picture:**
- Panel Size 109 cm (43")
- UHD
- 3840 x 2160 Pixel Resolution
- D-LED
- Brightness 220cd/m²
- Response Time 8ms
- Wide Viewing Angle 178°/178°
- Digital Comb Filter (DCF)
- Dynamic Noise Reduction Circuits (DNR)
- SMART Interface:
- SMART TV Interface
- HbbTV (Hybrid Broadcast Broadband TV)
- Wi-Fi Built in Modul
- DLNA Support
- **Signal Reception:**
- DVB-T2 (H.265, max. 3840 × 2160/60p)
- DVB-T
- DVB-C
- DVB-S2 (H.265, max. 3840 × 2160/60p, Skylink FastScan Tunning)
- PAL/SECAM BG/DK/I/L/L'
- **Sound:**
- Output Power 2 × 6W
- Equalizer
- **Inputs and outputs:**
- 3x HDMI, SCART, Mini AV in, Mini YPbPr, RJ45, Coaxial, Optical, 2x USB 2.0 (5V 0.5A), Headphone Jack
- CI+ interface
- **Supported formats:**
- Video: MKV, AVI, MP4, MOV, XviD
- Audio: MP3, AAC, WAV, AAC
- Photo: JPEG, JPG
- Text: TXT
- **Other:**
- Recording to USB Drive (PVR - TS format) / Playback from USB Drive
- Timeshift
- OSD: EN, CZE, POL, HUN, SVK, GER, FRE, ITA, SPA, GRC, HRV, SRP, BUL, SLV, LIT, RUS, DUT
- Electronic Programme Guide (EPG)
- Teletext
- Clock, Timer
- Parental Lock
- Hotel Mode
- Power, Consumption and Dimensions:
- **Power:** AC 100-240V 50/60Hz
- Energy Efficiency: 62W / <0.5W in standby mode
- Dimensions with Stand: 967x215x606mm
- Dimensions without Stand: 967x95x561mm
- **Weight:** 7.6kg
- VESA: 200 x 200

LED UHD DVB-T/T2/C/S2 TIMESHIFT USB REC

SLE 55U02TCS

UHD TELEVISON

- **Picture:**
- Panel Size 139 cm (55")
- UHD
- 3840 x 2160 Pixel Resolution
- D-LED
- Brightness 250cd/m²
- Response Time 8ms
- Wide Viewing Angle 178°/178°
- Digital Comb Filter (DCF)
- Dynamic Noise Reduction Circuits (DNR)
- **Signal Reception:**
- DVB-T2 (H.265, max. 3840 x 2160/60p)
- DVB-T
- DVB-C
- DVB-S2 (H.265, max. 3840 × 2160/60p, Skylink FastScan Tunning)
- PAL/SECAM BG/DK/I/L/L'
- **Sound:**
- Output Power 2 × 8W
- Equalizer
- **Inputs and outputs:**
- 3x HDMI, SCART, Mini AV in, Mini YPbPr, Coaxial, 2x USB 2.0 (5V 0.5A), Headphone Jack
- CI+ interface
- **Supported formats:**
- Video: MKV, AVI, MP4, MOV, XviD
- Audio: MP3, AAC, WAV
- Photo: JPEG, JPG
- Text: TXT
- **Other:**
- Recording to USB Drive (PVR - TS format) / Playback from USB Drive
- Timeshift
- OSD: EN, CZE, POL, HUN, SVK, GER, FRE, ITA, SPA, GRC, HRV, SRP, BUL, SLV, LIT, RUS, DUT
- Electronic Programme Guide (EPG)
- Teletext
- Clock, Timer
- Parental Lock
- Hotel Mode
- Power, Consumption and Dimensions:
- **Power:** AC 100-240V 50/60Hz
- Energy Efficiency: 108W / <0.5W in standby mode
- Dimensions with Stand: 1234x310x766mm
- Dimensions without Stand: 1234x90x711mm
- **Weight:** 14.2kg
- VESA: 200 x 200

USB REC TIMESHIFT DVB-T/T2/C/S2 UHD LED

SLE 50U02TCS

UHD TELEVISON

- **Picture:**
- Panel Size 127 cm (50")
- UHD
- 3840 x 2160 Pixel Resolution
- D-LED
- Brightness 250cd/m²
- Response Time 8ms
- Wide Viewing Angle 178°/178°
- Digital Comb Filter (DCF)
- Dynamic Noise Reduction Circuits (DNR)
- **Signal Reception:**
- DVB-T2 (H.265, max. 3840 x 2160/60p)
- DVB-T
- DVB-C
- DVB-S2 (H.265, max. 3840 × 2160/60p, Skylink FastScan Tunning)
- PAL/SECAM BG/DK/I/L/L'
- **Sound:**
- Output Power 2 × 8W
- Equalizer
- **Inputs and outputs:**
- 3x HDMI, SCART, Mini AV in, Mini YPbPr, Coaxial, 2x USB 2.0 (5V 0.5A), Headphone Jack
- CI+ interface
- **Supported formats:**
- Video: MKV, AVI, MP4, MOV, XviD
- Audio: MP3, AAC, WAV
- Photo: JPEG, JPG
- Text: TXT
- **Other:**
- Recording to USB Drive (PVR - TS format) / Playback from USB Drive
- Timeshift
- OSD: EN, CZE, POL, HUN, SVK, GER, FRE, ITA, SPA, GRC, HRV, SRP, BUL, SLV, LIT, RUS, DUT
- Electronic Programme Guide (EPG)
- Teletext
- Clock, Timer
- Parental Lock
- Hotel Mode
- Power, Consumption and Dimensions:
- **Power:** AC 100-240V 50/60Hz
- Energy Efficiency: 93W / <0.5W in standby mode
- Dimensions with Stand: 1124x236x692mm
- Dimensions without Stand: 1124x92x648mm
- **Weight:** 11.6kg
- VESA: 200 x 200

LED FULL HD 1920x1080 DVB-T/T2/C/S2 TIMESHIFT USB REC

SLE 58F58TCS

FULL HD TELEVISION

- **Picture:**
- Panel Size 147 cm (58")
- Full HD
- 1920 x 1080 Pixel Resolution
- D-LED Display Backlight
- Brightness 270 cd/m²
- Response Time 9 ms
- Wide Viewing Angle 176°/176°
- Dynamic Noise Reduction Circuits (DNR)
- Digital Comb Filter (DCF)
- **Signal Reception:**
- DVB-T2 (H.265, max. 1920 x 1080/60p)
- DVB-T
- DVB-C
- DVB-S2
- PAL/SECAM BG/DK/I
- **Sound:**
- Power Output 2x8 W
- Equalizer
- **Inputs and outputs:**
- 3x HDMI (1x s MHL), AV in, Coaxial, PC Audio in, SCART, 2x USB 2.0, Headphone jack
- Recording to USB Drive (PVR - TS format) / Playback from USB Drive
- USB Port (HEVC Playback Support)
- CI+ Interface
- **Supported formats:**
- Video: HEVC, MKV, AVI, MP4, MOV
- Audio: MP3
- Photo: JPEG, JPG, PNG, BMP
- **Other:**
- OSD: EN, CZE, POL, HUN, SVK, GRC, ROM, BUL, HRV, SLV, SRB
- Electronic Programme Guide EPG
- Teletext
- AVL
- Clock, Timer
- Hotel mode
- Parental lock
- Power, Consumption and Dimensions:
- **Power:** AC 100–240 V
- Energy Efficiency: 180 W / <0.5 W in Standby Mode
- Dimensions with Stand: 1305 x 231 x 808 mm
- Dimensions without Stand: 1305 x 96 x 764 mm
- **Weight:** 17.4 kg
- VESA: 400 x 200

USB REC TIMESHIFT DVB-T/T2/C/S2 FULL HD 1920x1080 LED

SLE 43F14TCS

FULL HD TELEVISION

- **Picture:**
- Panel Size 109 cm (43")
- Full HD
- Resolution 1920 x 1080 pixels
- D-LED
- Brightness 200cd/m²
- Response Time 8.5ms
- Wide Viewing Angle 178°/178°
- Digital Comb Filter (DCF)
- Dynamic Noise Reduction Circuits (DNR)
- **Signal Reception:**
- DVB-T2 (H.265, max. 1920 x 1080/60p)
- DVB-T
- DVB-C
- DVB-S2 (Skylink FastScan Tunning)
- PAL/SECAM BG/DK/I/L/L'
- **Sound:**
- Output Power 2 × 6W
- Equalizer
- **Inputs and outputs:**
- 3x HDMI, SCART, Mini AV in, Mini YPbPr, VGA in, PC Audio in, Coaxial, USB 2.0 (5V 0.5A), Headphone Jack
- CI+ interface
- **Supported formats:**
- Video: MKV, AVI, MP4, MOV, XviD
- Audio: MP3, AAC, WAV
- Photo: JPEG, JPG
- Text: TXT
- **Other:**
- Recording to USB Drive (PVR - TS format) / Playback from USB Drive
- Timeshift
- OSD: EN, CZE, POL, HUN, SVK, GER, FRE, ITA, SPA, GRC, HRV, SRP, BUL, SLV, LIT, RUS, DUT
- Electronic Programme Guide (EPG)
- Teletext
- Clock, Timer
- Parental Lock
- Hotel Mode
- Power, Consumption and Dimensions:
- **Power:** AC 100-240V 50/60Hz
- Energy Efficiency: 60W / <0.5W in standby mode
- Dimensions with Stand: 967x215x606mm
- Dimensions without Stand: 967x95x561mm
- **Weight:** 7.6kg
- VESA: 200 x 200

LED FULL HD 1920x1080 DVB-T/T2/C/S2 TIMESHIFT USB REC

SLE 40F14TCS

FULL HD TELEVISION

- **Picture:**
- Panel Size 102 cm (40")
- Full HD
- Resolution 1920 x 1080 pixels
- D-LED
- Brightness 200cd/m²
- Response Time 8.5ms
- Wide Viewing Angle 178°/178°
- Digital Comb Filter (DCF)
- Dynamic Noise Reduction Circuits (DNR)
- **Signal Reception:**
- DVB-T2 (H.265, max. 1920 x 1080/60p)
- DVB-T
- DVB-C
- DVB-S2 (Skylink FastScan Tunning)
- PAL/SECAM BG/DK/I/L/L'
- **Sound:**
- Output Power 2 × 6W
- Equalizer
- **Inputs and outputs:**
- 3x HDMI, SCART, Mini AV in, Mini YPbPr, VGA in, PC Audio in, Coaxial, USB 2.0 (5V 0.5A), Headphone Jack
- CI+ interface
- **Supported formats:**
- Video: MKV, AVI, MP4, MOV, XviD
- Audio: MP3, AAC, WAV
- Photo: JPEG, JPG
- Text: TXT
- **Other:**
- Recording to USB Drive (PVR - TS format) / Playback from USB Drive
- Timeshift
- OSD: EN, CZE, POL, HUN, SVK, GER, FRE, ITA, SPA, GRC, HRV, SRP, BUL, SLV, LIT, RUS, DUT
- Electronic Programme Guide (EPG)
- Teletext
- Clock, Timer
- Parental Lock
- Hotel Mode
- Power, Consumption and Dimensions:
- **Power:** AC 100-240V 50/60Hz
- Energy Efficiency: 49W / <0.5W in standby mode
- Dimensions with Stand: 903x215x563mm
- Dimensions without Stand: 903x81x517mm
- **Weight:** 6.3kg
- VESA: 200 x 200

USB REC TIMESHIFT DVB-T/T2/C/S2 FULL HD 1920x1080 LED

SLE 39F14TCS

FULL HD TELEVISION

- **Picture:**
- Panel Size 99 cm (39")
- Full HD
- Resolution 1920 x 1080 pixels
- D-LED
- Brightness 200cd/m²
- Response Time 6.5ms
- Wide Viewing Angle 178°/178°
- Digital Comb Filter (DCF)
- Dynamic Noise Reduction Circuits (DNR)
- **Signal Reception:**
- DVB-T2 (H.265, max. 1920 x 1080/60p)
- DVB-T
- DVB-C
- DVB-S2 (Skylink FastScan Tunning)
- PAL/SECAM BG/DK/I/L/L'
- **Sound:**
- Output Power 2 × 6W
- Equalizer
- **Inputs and outputs:**
- 3x HDMI, SCART, Mini AV in, Mini YPbPr, VGA in, PC Audio in, Coaxial, USB 2.0 (5V 0.5A), Headphone Jack
- CI+ interface
- **Supported formats:**
- Video: MKV, AVI, MP4, MOV, XviD
- Audio: MP3, AAC, WAV
- Photo: JPEG, JPG
- Text: TXT
- **Other:**
- Recording to USB Drive (PVR - TS format) / Playback from USB Drive
- Timeshift
- OSD: EN, CZE, POL, HUN, SVK, GER, FRE, ITA, SPA, GRC, HRV, SRP, BUL, SLV, LIT, RUS, DUT
- Electronic Programme Guide (EPG)
- Teletext
- Clock, Timer
- Parental Lock
- Hotel Mode
- Power, Consumption and Dimensions:
- **Power:** AC 100-240V 50/60Hz
- Energy Efficiency: 48W / <0.5W in standby mode
- Dimensions with Stand: 890x220x563mm
- Dimensions without Stand: 890x89x528mm
- **Weight:** 6.3kg
- VESA: 200 x 200

LED HD ready DVB-T/T2/C/S2 TIMESHIFT USB REC

SLE 3223TCS

HD READY TELEVISION

- **Picture:**
- Panel Size 81 cm (32")
- HD Ready
- Resolution 1366 x 768 pixels
- D-LED
- Brightness 200cd/m²
- Response Time 8ms
- Wide Viewing Angle 178°/178°
- Digital Comb Filter (DCF)
- Dynamic Noise Reduction Circuits (DNR)
- **Signal Reception:**
- DVB-T2 (H.265, max. 1920 x 1080/60p)
- DVB-T
- DVB-C
- DVB-S2 (Skylink FastScan Tunning)
- PAL/SECAM BG/DK/I/L/L'
- **Sound:**
- Output Power 2 × 6W
- Equalizer
- **Inputs and outputs:**
- 3x HDMI, SCART, Mini AV in, Mini YPbPr, VGA in, PC Audio in, Coaxial, USB 2.0 (5V 0.5A), Headphone Jack
- CI+ interface
- **Supported formats:**
- Video: MKV, AVI, MP4, MOV, XviD
- Audio: MP3, AAC, WAV
- Photo: JPEG, JPG
- Text: TXT
- **Other:**
- Recording to USB Drive (PVR - TS format) / Playback from USB Drive
- Timeshift
- OSD: EN, CZE, POL, HUN, SVK, GER, FRE, ITA, SPA, GRC, HRV, SRP, BUL, SLV, LIT, RUS, DUT
- Electronic Programme Guide (EPG)
- Teletext
- Clock, Timer
- Parental Lock
- Hotel Mode
- Power, Consumption and Dimensions:
- **Power:** AC 100-240V 50/60Hz
- Energy Efficiency: 40W / <0.5W in standby mode
- Dimensions with Stand: 731 x 202 x 467mm
- Dimensions without Stand: 731 x 82 x 431mm
- **Weight:** 3.9kg
- VESA: 200 x 100

USB REC TIMESHIFT DVB-T/T2/C/S2 HD ready LED

SLE 3222TCS

HD READY TELEVISION

- **Picture:**
- Panel Size 81 cm (32")
- HD Ready
- Resolution 1366 x 768 pixels
- D-LED
- Brightness 180cd/m²
- Response Time 8.5ms
- Wide Viewing Angle 178°/178°
- Digital Comb Filter (DCF)
- Dynamic Noise Reduction Circuits (DNR)
- **Signal Reception:**
- DVB-T2 (H.265, max. 1920 x 1080/60p)
- DVB-T
- DVB-C
- DVB-S2 (Skylink FastScan Tunning)
- PAL/SECAM BG/DK/I/L/L'
- **Sound:**
- Output Power 2 × 6W
- Equalizer
- **Inputs and outputs:**
- 3x HDMI, SCART, Mini AV in, Mini YPbPr, VGA in, PC Audio in, Coaxial, USB 2.0 (5V 0.5A), Headphone Jack
- CI+ interface
- **Supported formats:**
- Video: MKV, AVI, MP4, MOV, XviD
- Audio: MP3, AAC, WAV
- Photo: JPEG, JPG
- Text: TXT
- **Other:**
- Recording to USB Drive (PVR - TS format) / Playback from USB Drive
- Timeshift
- OSD: EN, CZE, POL, HUN, SVK, GER, FRE, ITA, SPA, GRC, HRV, SRP, BUL, SLV, LIT, RUS, DUT
- Electronic Programme Guide (EPG)
- Teletext
- Clock, Timer
- Parental Lock
- Hotel Mode
- Power, Consumption and Dimensions:
- **Power:** AC 100-240V 50/60Hz
- Energy Efficiency: 40W / <0.5W in standby mode
- Dimensions with Stand: 731 x 202 x 467mm
- Dimensions without Stand: 731 x 82 x 431mm
- **Weight:** 3.9kg
- VESA: 200 x 100

LED HD ready DVB-T/T2/C/S2 TIMESHIFT USB REC

SLE 2814TCS

HD READY TELEVISION

- **Picture:**
- Panel Size 71 cm (28")
- HD Ready
- Resolution 1366 x 768 pixels
- D-LED
- Brightness 200cd/m²
- Response Time 8ms
- Wide Viewing Angle 178°/178°
- Digital Comb Filter (DCF)
- Dynamic Noise Reduction Circuits (DNR)
- **Signal Reception:**
- DVB-T2 (H.265, max. 1920 x 1080/60p)
- DVB-T
- DVB-C
- DVB-S2 (Skylink FastScan Tunning)
- PAL/SECAM BG/DK/I/L/L'
- **Sound:**
- Output Power 2 × 6W
- Equalizer
- **Inputs and outputs:**
- 3x HDMI, SCART, Mini AV in, Mini YPbPr, VGA in, PC Audio in, Coaxial, USB 2.0 (5V 0.5A), Headphone Jack
- CI+ interface
- **Supported formats:**
- Video: MKV, AVI, MP4, MOV, XviD
- Audio: MP3, AAC, WAV, AAC
- Photo: JPEG, JPG
- Text: TXT
- **Other:**
- Recording to USB Drive (PVR - TS format) / Playback from USB Drive
- Timeshift
- OSD: EN, CZE, POL, HUN, SVK, GER, FRE, ITA, SPA, GRC, HRV, SRP, BUL, SLV, LIT, RUS, DUT
- Electronic Programme Guide (EPG)
- Teletext
- Clock, Timer
- Parental Lock
- Hotel Mode
- Power, Consumption and Dimensions:
- **Power:** AC 100-240V 50/60Hz
- Energy Efficiency: 31W / <0.5W in standby mode
- Dimensions with Stand: 637 x 202 x 414mm
- Dimensions without Stand: 637 x 87 x 380mm
- **Weight:** 3.5kg
- VESA: 100 x 100

USB REC TIMESHIFT DVB-T/T2/C/S2 HD ready LED

SLE 2466TCS

HD READY TELEVISION

- **Picture:**
- Panel Size 60cm (24")
- HD Ready
- Resolution 1366 x 768 pixels
- D-LED
- Brightness 180cd/m²
- Response Time 8ms
- Wide Viewing Angle 178°/178°
- Digital Comb Filter (DCF)
- Dynamic Noise Reduction Circuits (DNR)
- **Signal Reception:**
- DVB-T2 (H.265, max. 1920 x 1080/60p)
- DVB-T
- DVB-C
- DVB-S2 (Skylink FastScan Tunning)
- PAL/SECAM BG/DK/I/L/L'
- **Sound:**
- Output Power 2 × 3W
- Equalizer
- **Inputs and outputs:**
- HDMI, SCART, Mini AV in, Mini YPbPr, VGA in, PC Audio in, Coaxial, USB 2.0 (5V 0.5A), Headphone Jack
- CI+ interface
- **Supported formats:**
- Video: MKV, AVI, MP4, MOV, XviD
- Audio: MP3, AAC, WAV, AAC
- Photo: JPEG, JPG
- Text: TXT
- **Other:**
- Recording to USB Drive (PVR - TS format) / Playback from USB Drive
- Timeshift
- OSD: EN, CZE, POL, HUN, SVK, GER, FRE, ITA, SPA, GRC, HRV, SRP, BUL, SLV, LIT, RUS, DUT
- Electronic Programme Guide (EPG)
- Teletext
- Clock, Timer
- Parental Lock
- Hotel Mode
- Power, Consumption and Dimensions:
- **Power:** AC 230V 50/60Hz (Adaptor AC 230V / DC 12V)
- Energy Efficiency: 23W / <0.5W in standby mode
- Dimensions with Stand: 557 x 367 x 165mm
- Dimensions without Stand: 557 x 333 x 75mm
- **Weight:** 2.9kg
- VESA: 100 x 100
- Accessories: Remote Control, 230V Adaptor, 12V Adaptor, User Manual

LED HD ready DVB-T/T2/C TIMESHIFT USB REC

SLE 2465DTC

HD READY TELEVISION

- **Picture:**
- Panel Size 60 cm (24")
- HD Ready
- HD DVB-T/T2/C Tuners with HEVC Support
- Intergrated DVD Player
- USB Recording and Playback
- **Picture:**
- Panel Size 60cm (24")
- HD Ready
- Resolution 1366 x 768 pixels
- D-LED
- Brightness 180cd/m
- Response Time 8.5ms
- Wide Viewing Angle 176°/176°
- 3D Digital Comb Filter (DCF)
- Dynamic Noise Reduction Circuits (DNR)
- **Signal Reception:**
- DVB-T2 HEVC/H.265 (1080P 60fps)
- DVB-T
- DVB-C
- PAL/SECAM BG/DK/I/L
- **Sound:**
- Output Power 2 × 3W
- Equalizer
- **Inputs and outputs:**
- HDMI, SCART, AV in, YPbPr, VGA, CVBS, PC Audio, Coaxial, USB, Headphone Jack
- Recording to USB Drive (PVR - TS format) / Playback from USB Drive
- Timeshift
- CI+ interface
- **Supported formats:**
- Supported DVD formats: DVD±R/W, SVCD, CD-DA, CD-R/RW, MP3, WMA, JPEG
- USB Video: MKV, AVI, MP4, WMV, MOV, DivX, XviD
- USB Audio: MP3
- USB Photo: JPEG, JPG
- USB Text: TXT
- **Other:**
- OSD: EN, CZE, POL, HUN, SVK, GER, FRE, ITA, SPA, GRC, HRV, SRP, BUL, SLV, LIT, RUS, DUT
- Electronic Programme Guide (EPG)
- Teletext
- Clock, Timer
- Parental Lock
- Hotel Mode
- Power, Consumption and Dimensions:
- **Power:** AC 230V 50/60Hz
- Energy Efficiency: 40W / <0.5W in standby mode
- Dimensions with Stand: 557 x 159.5 x 358mm
- Dimensions without Stand: 557 x 81.5 x 336mm
- **Weight:** 2.43kg
- VESA: 100 x 100

USB REC TIMESHIFT DVB-T/T2/C/S2 HD ready LED

SLE 2058TCS

HD READY TELEVISION

- **Picture:**
- Panel Size 50 cm (20")
- HD Ready
- 1366 x 768 Pixel Resolution
- D-LED Display Backlight
- Dynamic Contrast 1,000,000:1
- Brightness 200 cd/m²
- Response Time 12 ms
- Wide Viewing Angle 170°/170°
- Dynamic Noise Reduction Circuits (DNR)
- Digital Comb Filter (DCF)
- **Signal Reception:**
- DVB-T2 (H.265, max. 1920 x 1080/60p)
- DVB-T
- DVB-C
- DVB-S2
- PAL/SECAM BG/DK/I
- **Sound:**
- Power Output 2x2 W
- Equalizer
- **Inputs and outputs:**
- 1x HDMI, Coaxial, SCART, PC Audio In, Mini YPbPr, Mini AV, USB 2.0, Headphone jack
- CI+ Interface
- **Supported formats:**
- Video: HEVC, MKV, AVI, MP4, MPEG, MOV, VOB, TS
- Audio: MP3
- Photo: JPEG, JPG, PNG, BMP
- **Other:**
- OSD: EN, CZE, POL, HUN, SVK, GRC, ROM, BUL, HRV, SLV SRB
- Recording to USB Drive (PVR - TS format) / Playback from USB Drive
- USB Port (HEVC Support)
- Electronic Programme Guide EPG
- Timeshift
- Teletext
- Clock, Timer
- Hotel Mode
- Parental Lock
- Power, Consumption and Dimensions:
- **Power:** AC 220-240V 50/60Hz
- Energy Efficiency: 40 W / <0.5 W in Standby Mode
- Dimensions with Stand: 490 x 157 x 307 mm
- Dimensions without Stand: 463 x 91 x 272 mm
- **Weight:** 2.0 kg
- VESA: 100 x 100

LED HD ready DVB-T/T2/C/S2 TIMESHIFT USB REC

SLE 1961TCS

HD READY TELEVISION

- **Picture:**
- Panel Size 48cm (19")
- HD Ready
- Resolution 1366 x 768 pixels
- D-LED
- Brightness 180cd/m²
- Response Time 8ms
- Wide Viewing Angle 178°/178°
- Digital Comb Filter (DCF)
- Dynamic Noise Reduction Circuits (DNR)
- **Signal Reception:**
- DVB-T2 (H.265, max. 1920 x 1080/60p)
- DVB-T
- DVB-C
- DVB-S2 (Skylink FastScan Tunning)
- PAL/SECAM BG/DK/I/L/L'
- **Sound:**
- Output Power 2 × 3W
- Equalizer
- **Inputs and outputs:**
- HDMI, SCART, Mini AV in, Mini YPbPr, VGA in, PC Audio in, Coaxial, USB 2.0 (5V 0.5A), Headphone Jack
- CI+ interface
- **Supported formats:**
- Video: MKV, AVI, MP4, MOV, XviD
- Audio: MP3, AAC, WAV, AAC
- Photo: JPEG, JPG
- Text: TXT
- **Other:**
- Recording to USB Drive (PVR - TS format) / Playback from USB Drive
- Timeshift
- OSD: EN, CZE, POL, HUN, SVK, GER, FRE, ITA, SPA, GRC, HRV, SRP, BUL, SLV, LIT, RUS, DUT
- Electronic Programme Guide (EPG)
- Teletext
- Clock, Timer
- Parental Lock
- Hotel Mode
- Power, Consumption and Dimensions:
- **Power:** AC 230V 50/60Hz (adapter AC 230V / DC 12V)
- Energy Efficiency: 18W / <0.5W in standby mode
- Dimensions with Stand: 440 x 296 x 161mm
- Dimensions without Stand: 440 x 265 x 61mm
- **Weight:** 2.2kg
- VESA: 100 x 100
- Accessories: Remote Control, 230V Adaptor, 12V Adaptor, User Manual

MODEL	SLE 55US400	SLE 50US400	SLE 43US400	SLE 55U02	SLE 50U02	SLE 58F58	SLE 43F14	SLE 40F14	SLE 39F14
Picture / display									
Diagonal in inch / cm	55"/139cm	50"/127cm	43"/109cm	55"/139cm	50"/127cm	58"/147cm	43"/109cm	40"/102cm	39"/99cm
Panel resolution	3840x2160	3840x2160	3840x2160	3840x2160	3840x2160	1920x1080	1920x1080	1920x1080	1920x1080
Frequency	50Hz	50Hz	50Hz	50Hz	50Hz	50Hz	50Hz	50Hz	50Hz
LED illumination	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Viewing angle	178/178	178/178	178/178	178/178	178/178	176/176	178/178	178/178	178/178
Response time	8	8	8	8	8	9	8,5	8,5	6,5
Features									
TV tuner	HD DVB-T2/C/S2	HD DVB-T2/C/S2	HD DVB-T2/C/S2	HD DVB-T2/C/S2	HD DVB-T2/C/S2	HD DVB-T2/C/S2	HD DVB-T2/C/S2	HD DVB-T2/C/S2	HD DVB-T2/C/S2
Built-in DVD	No	No	No	Ne	Ne	No	No	No	No
Off-timer	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
ConNection possibilities									
USB	Ano (0,5A)	Ano (0,5A)	Ano (0,5A)	Ano (0,5A)	Ano (0,5A)	Ano (0,5A)	Ano (0,5A)	Ano (0,5A)	Ano (0,5A)
Playback from USB	Video/Foto/Music	Video/Foto/Music	Video/Foto/Music	Video/Foto/Music	Video/Foto/Music	Video/Foto/Music	Video/Foto/Music	Video/Foto/Music	Video/Foto/Music
TV broadcast record on USB	Ano	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
CI slot	Ano	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
SCART amount	1	1	1	1	1	1	1	1	1
VGA	No	No	No	Ne	Ne	Ne	Yes	Yes	Yes
CompoNent input YPbPr	Yes	Yes	Yes	Yes	Yes	Ne	Yes	Yes	Yes
HeadphoNes conNection	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
HDMI amount	3	3	3	3	3	3	3	3	3
Dimensions and color									
Color	Black	Black	Black	Black	Black	Silver	Black	Black	Black
Dimensions with stand (HxWxd) mm	1234x310x766	1124x236x692	967x215x606	1234x310x766	1124x236x692	1305 x 231 x 808	967x215x606	903x215x563	890x2280x563
Dimensions w/o stand (HxWxD) mm	1234x90x711	1124x92x648	967x95x561	1234x90x711	1124x92x648	1305 x 96 x 764	967x95x561	903x81x517	890x89x528
Weight	14,2Kg	11,6Kg	7,6Kg	14,2Kg	11,6Kg	17,4Kg	7,6Kg	6,3Kg	6,3Kg

MODEL	SLE 3223	SLE 3222	SLE 2814	SLE 2466	SLE 2465	SLE 2058	SLE 1961
Picture / display							
Diagonal in inch / cm	32"/81cm	32"/81cm	28"/71cm	24"/60cm	24"/60cm	20"/50cm	19"/47cm
Panel resolution	1366x768	1366x768	1366x768	1366x768	1366x768	1366x768	1366x768
Frequency	50Hz	50Hz	50Hz	50Hz	50Hz	50Hz	50Hz
LED illumination	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Viewing angle	178/178	178/178	178/178	178/178	176/176	170/170	178/178
Response time	8	8,5	8	8	8,5	12	8
Features							
TV tuner	HD DVB-T2/C/S2	HD DVB-T2/C/S2	HD DVB-T2/C/S2	HD DVB-T2/C/S2	HD DVB-T2/C/S2	HD DVB-T2/C/S2	HD DVB-T2/C/S2
Built-in DVD	No	No	No	No	Yes	No	No
Off-timer	Yes	Yes	Yes	Yes	Yes	Yes	Yes
ConNoction possibilities							
USB	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Playback from USB	Video/Foto/Music	Video/Foto/Music	Video/Foto/Music	Video/Foto/Music	Video/Foto/Music	Video/Foto/Music	Video/Foto/Music
TV broadcast record on USB	Yes	Yes	Yes	Yes	Yes	Yes	Yes
CI slot	Yes	Yes	Yes	Yes	Yes	Yes	Yes
SCART amount	1	1	1	1	1	1	1
VGA	Yes	Yes	Yes	Yes	Yes	Ne	Ne
CompoNont input YPbPr	Yes	Yes	Yes	Yes	Yes	Yes	Yes
HeadphoNos conNoction	Yes	Yes	Yes	Yes	Yes	Yes	Yes
HDMI amount	3	3	3	1	1	1	1
Dimensions and color							
Color	Black	Black	Black	Black	Black	Black	Black
Dimensions with stand (HxWxd) mm	731x202x467	731x202x467	637x202x414	557x165x367	557x160x358	490×157×307	440×161×296
Dimensions w/o stand (HxWxD) mm	731x82x431	731x82x431	637x87x380	557x75x333	557x82x336	463×91×272	440×61×265
Weight	3,9Kg	3,9Kg	3,5Kg	2,9Kg	2,4Kg	2,0Kg	2,2Kg

TV accessories

22 SET-TOP-BOXES
23 ANTENNAS

SDB 5003

SET-TOP-BOX

- **Signal Reception:**
- DVB-T2 - HEVC/H.265 (1080P 60fps)
- DVB-T - MPEG-2/MPEG-4 (H.264)
- PAL/SECAM BG/DK/I/L
- **Inputs and outputs:**
- Antenna Power Supply 5V/50mA - RF In and Out
- HDMI 1.3 Video Output (1080p)
- SCART Video Output
- USB Port
- Coaxial
- Supported USB formats:
- Video: AVI, TS, TRP, MP4, MKV, MOV
- Audio: MP3, FLAC
- **Picture:** JPG, JPEG, MPG, MPEG
- **Other:**
- USB - Recording, Timeshift, Media Playback
- 7 Days EPG (Electronic Programme Guide)
- Teletext
- TV + Radio Channel List
- Favorite Channel List
- Parental Lock
- Aspect Ratio Handling
- Booking Timer (Up to 8 Events), Sleep Timer
- 16:9/4:3 Format Compatible
- Power Supply: 220-240V~ 50/60Hz
- Power Consumption: Max 6W
- Stand-By Power Consumption: Max 1W
- Dimension: 168 x 36 x 90mm

DVB-T/T2 HDMI CERTIFIED USB TIMESHIFT USB REC

SDB 5002

SET-TOP-BOX

- **Signal Reception:**
- DVB-T2 - HEVC/H.265 (1080P 60fps)
- DVB-T - MPEG-2/MPEG-4 (H.264)
- PAL/SECAM BG/DK/I/L
- **Inputs and outputs:**
- Antenna Power Supply 5V/50mA - RF In and Out
- HDMI 1.3 Video Output (1080p)
- SCART Video Output
- USB Port
- RJ45
- Coaxial
- Supported USB formats:
- Video: AVI, TS, TRP, MP4, MKV, MOV
- Audio: MP3, FLAC
- **Picture:** JPG, JPEG, MPG, MPEG
- **Other:**
- USB - Recording, Timeshift, Media Playback
- 7 Days EPG (Electronic Programme Guide)
- Teletext
- TV + Radio Channel List
- Favorite Channel List
- Parental Lock
- Aspect Ratio Handling
- Booking Timer (Up to 8 Events), Sleep Timer
- 16:9/4:3 Format Compatible
- Power Supply: 220-240V~ 50/60Hz
- Power Consumption: Max 7W
- Stand-By Power Consumption: Max 1W
- Dimension: 168 x 37 x 118mm

DVB-T/T2 HDMI CERTIFIED USB TIMESHIFT USB REC

SDA 640

OUTDOOR DVB-T ANTENNA

- Frequency Range: UHF470 862 MHz
- Impedance 75 OHM
- Received Channels: 21-69
- Gain 16 dB
- Front to Back Ratio: 25 dB
- Resistant and Robust Outdoor Design
- Built Symmetrization Element
- Horizontal Polarization
- Number of Element: 42
- Range: 120 km
- Antenna is suitable for regions with low signal level
- Connector: F-connector
- To connect the antenna, you can use Sencor antenna cable SAV 153-150 and connector Sencor SAV 129-000

DVB-T2/T1 LTE Filter

SDA 630

OUTDOOR DVB-T ANTENNA

- Frequency Range: UHF470 862 MHz
- Impedance 75 OHM
- Received Chanels: 21-69
- Gain 11 dB
- Front to Back Ratio: 24 dB
- Resistant and Robust Outdoor Design
- Clever folding structure for easy installation
- Built-in Symmetrization Element
- Horizontal Polarization
- Number of Elements: 20
- Range: 75 km
- Connection: F-connector

DVB-T2/T1

SDA 612

OUTDOOR DVB-T ANTENNA

- Frequency Range: UHF470 862 MHz
- Impedance 75 Ohm
- Accepted channels: 21-69
- 25 dB gain
- Front to back ratio: 25 dB
- Durable structure
- Built symetrizationí member
- Number of elements: 20
- Range: 80 km
- Connection via F-connector

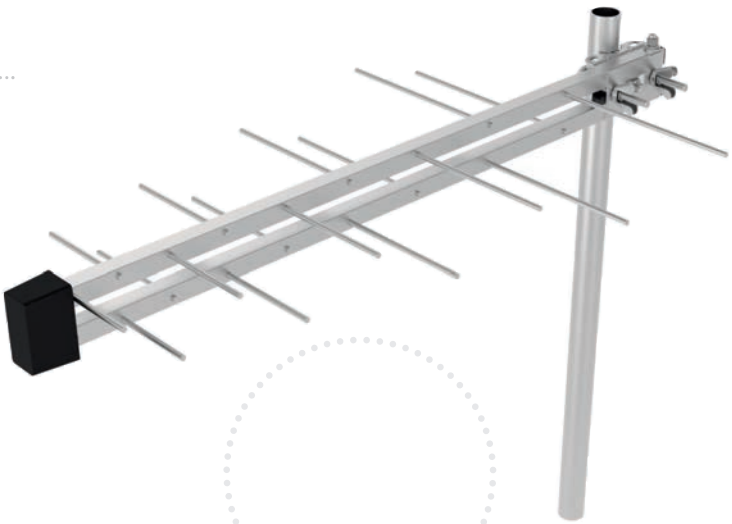

DVB-T2/T1 LTE Filter ***New***

SDA 610

OUTDOOR DVB-T ANTENNA

- Frequency Range: UHF470 862 MHz
- Impedance 75 Ohm
- Accepted channels: 21-69
- 12 dB gain
- Front to back ratio: 25 dB
- Durable and rugged outdoor
- Built symetrizationí member
- Number of elements: 42
- Range: 95 km
- Connection via F-connector

DVB-T2/T1

SDA 600

OUTDOOR DVB-T ANTENNA

- Frequency Range: UHF470 862 MHz
- Impedance 75 OHM
- Received Channels: 21-69
- Gain 9 dB
- Front to Back Ratio: 24 dB
- Resistant and Robust Outdoor Design
- Clever Folding Structure for Easy Installation
- Built-in Symmetrization Element
- Horizontal Polarization
- Number of Elements: 10
- Range: 75 km
- Connection: F-connector

DVB-T2/T1

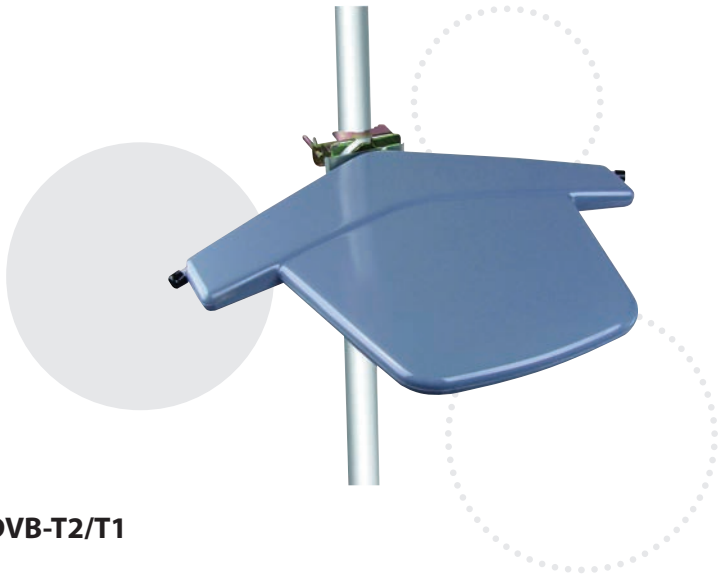

SDA 510

OUTDOOR DVB-T ANTENNA

- Frequency Range: UHF 470 870MHz
- VHF 47 - 230MHz, FM
- Impedance 75 Ω
- HDTV READY
- Horizontal and Vertical Polarisation
- Built-in High Performance Low Noise Amplifier
- Gain 25dB
- Power Supply 12V/100mA (230V/12V Adapter Included)
- Waterproof Outdoor Design
- Resistant against UV Radiation
- Connection through an F-Connector (Adapter to IEC Included)
- 2 Installation Options, Balcony/Pole

DVB-T2/T1

SDA 500
OUTDOOR DVB-T ANTENNA

- Frequency Range: UHF 470 870MHz
- VHF 47 - 230MHz, FM
- Impedance 75Ω
- HDTV READY
- Horizontal and Vertical Polarisation
- Built-in High Performance Low Noise Amplifier
- Gain 25dB
- Power Supply 6 V/100mA (230V/6V Adapter Included)
- Set-Top-Box or DTV Power Supply Optional
- Waterproof Outdoor Design
- Resistant against UV Radiation
- Connection through an F-Connector (Adapter to IEC Included)
- 2 Installation Options, Balcony/Pole
- In order to connect this antenna, you can use Sencor antenna cable SAV 153-150 and Sencor connector SAV 129-000.

DVB-T2/T1

SDA 310
INDOOR DVB-T ANTENNA

- Frequency Range: UHF 470 870MHz
- Stylish Modern Design
- Impedance 75Ω
- HDTV READY
- Horizontal Polarisation
- Built-in High Performance Low Noise Amplifier
- Gain 25dB
- Continuous Setting of Amplifier Performance
- Power Supply 12V/100mA (230V/12V Adapter included)
- Subscriber Line Included
- Power on LED Indicator

DVB-T2/T1

SDA 300
INDOOR DVB-T ANTENNA

- Frequency Range: UHF 470 870MHz
- Stylish Modern Design
- VHF 47 - 230MHz
- Impedance 75Ω
- HDTV READY
- Horizontal and Vertical Polarisation
- Built-in High Performance Low Noise Amplifier
- Gain 20dB
- Power Supply 6V/100mA (230V/6V Adapter Included)
- Set-Top-Box or DTV Power Supply Optional
- Subscriber Line Included
- Power on LED Indicator

DVB-T2/T1

SDA 210

INDOOR DVB-T ANTENNA

- Frequency Range: UHF 470 870MHz
- VHF 47 - 230MHz
- Stylish Modern Design
- Impedance 75Ω
- HDTV READY
- SMD Technology
- Horizontal and Vertical Polarisation
- Built-in High Performance Low Noise Amplifier
- Gain 20dB
- Continuous Setting of Amplifier Performance
- Power Supply 6V/100mA (230V/6V Adapter Included)
- Set-Top-Box or DTV Power Supply Optional
- USB Power Supply Optional
- Subscriber Line Included v

DVB-T2/T1

SDA 110

INDOOR DVB-T ANTENNA

- Frequency Range: UHF 470 870 MHz
- VHF 47-230 MHz, FM
- Impedance 75 Ohm
- HDTV READY
- horizontal polarization
- Powerful built-in low noise amplifier
- Gain 25 db
- Infinitely variable power amplifier
- 2 telescopic rods for better reception of VHF and FM
- Power supply 12 V / 100 mA (adapter 230 V / 12 V pack)
- Subscriber cord included
- LED power indicator

DVB-T2/T1

SDA 100

INDOOR DVB-T ANTENNA

- Frequency Range: UHF 470 870MHz
- VHF 47 - 230MHz, FM
- Impedance 75 OHM
- DTV READY
- Horizontal polarisation
- In-built low noise amplifier
- Gain 20dB
- Continuous setting of amplifier performance
- 2 telescopic rods for better VHF and FM reception
- Power supply 12V/100mA (220V/12V adapter included)
- Subscriber line included
- LED on indicator

DVB-T2/T1

Mobile phones and tablets

29 SMART
30 CLASSIC
33 CLAMSHELL
34 TABLETS
35 ACCESSORIES

New ***5,7"***

SENCOR P5700

MOBILE PHONE

- **Display**
- Display Size: 5.7" IPS Technology
- Full Lamination On-cell Display with 2.5D Full Frame Tempered Glass
- Resolution: HD 1440 x 720 Pixels 18:9
- Acceleration Sensor, Light Sensor, Proximity Sensor, Gravity sensor
- **Chipset**
- CPU: MTK MT6737H (Quad Core 1.3Ghz)
- GPU: Mali-720
- **Memory**
- RAM Memory: 2GB DDR3
- Flash Memory: 16GB
- Micro SDHC slot (up to 64GB)
- **Camera**
- Front Camera: 5MP
- Rear Camera: 13MP
- (Auto Focus, Panorama, Digital Zoom, LED Flash Light)
- Network/Connectivity
- Dual Band WiFi: 2.4GHz + 5GHz (802.11 b/g/n)
- Bluetooth: BT 4.0 A2DP
- GPS
- GSM 850/900/1800/1900MHz
- FDD LTE 800/900/1800/2100/2600
- WCDMA 900/2100
- **Features**
- Fingerprinter
- Dual SIM
- FM Radio (87.5 - 108MHz)
- Others
- OS: Android 7.0
- Battery: 3000mAh Li-Pol Battery
- Jack 3.5mm
- USB-C
- **Power:** 5V 1000mA
- **Dimensions**: 154.5 x 72.8 x 8.5 mm
- **Weight:** 186 g (including battery)
- **Accessories:** USB C Cable, AC Adaptor

New ***5,5"***

SENCOR P5504

MOBILE PHONE

- **Display**
- Display Size: 5.5" IPS Technology
- Full Lamination Display with 2.5D Full Frame Tempered Glass
- Resolution: HD 1280 x 720 Pixels
- Acceleration Sensor, Light Sensor, Proximity Sensor, Gravity sensor
- **Chipset**
- CPU: MTK MT6737 (Quad Core 1.2Ghz)
- GPU: Mali-720
- **Memory**
- RAM Memory: 2GB DDR3
- Flash Memory: 16GB
- Micro SDHC slot (up to 64GB)
- **Camera**
- Front Camera: 5MP
- Rear Camera: 13MP
- (Auto Focus, Panorama, Digital Zoom, LED Flash Light)
- Network/Connectivity
- WiFi: 2.4GHz (802.11 b/g/n)
- Bluetooth: BT 4.0 A2DP
- GPS A-GPS
- GSM 850/900/1800/1900MHz
- FDD LTE 800/900/1800/2100/2600
- WCDMA 900/2100
- Features
- Fingerprinter
- Dual SIM
- FM Radio (87.5 - 108MHz)
- Others
- OS: Android 7.0
- Battery: 3000mAh Li-Pol Battery
- Jack 3.5mm
- Micro USB 2.0
- **Power:** 5V 1000mA
- **Dimensions:** 155.5 x 77.6 x 9.2 mm
- **Weight:** 180g (including battery)
- **Accessories:** USB Cable, AC Adaptor

ELEMENT P030
MOBILE PHONE

- **Display:**
- Size: 2.8" TFT
- Resolution: 240 x 320 px
- Chipset:
- CPU: MTK6261D
- Memory:
- RAM: 32MB
- ROM: 32MB
- Micro SDHC Slot (up to 8GB)
- **Camera:**
- Rear: 0.3 Mpx (VGA)
- Network/Connectivity:
- GSM Dual Band 900/1800MHz
- Bluetooth 2.1
- **Features:**
- FM Radio
- Torch Light
- Vibration Motor
- Video and Music Player
- Keypad Lock
- **Others:**
- Earphone Jack 3.5 mm
- Micro USB 2.0
- Battery: Li-Ion 1500mAh
- Dimensions: 132 x 57.5 x 10.8 mm
- Weight: 93 g
- **Accessories:**
- AC Adaptor, Earphones, User Manual

2,8" TFT 240 x 320 BT 2.1 1500 mAh

ELEMENT P020
MOBILE PHONE

- **Display:**
- Size: 2.4" (Color TFT LCD)
- Resolution: 240 x 320 px
- Chipset:
- CPU: SC6531DA
- **Memory:**
- Micro SDHC slot (up to 8GB)
- Camera:
- Rear: VGA
- Network/Connectivity:
- GSM Dual Band 900/1800MHz
- Bluetooth 2.1
- **Features:**
- FM Radio
- DUAL SIM Standby
- Video and Music Player
- Keypad Lock
- Torch Light
- **Others:**
- Earphone Jack 3.5 mm
- Micro USB 2.0
- Battery: Li-Ion 1100mAh
- Dimensions: 122 x 51.5 x 11.3 mm
- **Accessories:**
- AC Adaptor, Earphones, User Manual

2,4" TFT 240 x 320 BT 2.1 1100 mAh

ELEMENT P009
MOBILE PHONE

- **Display:**
- Size: 1.77" TFT
- Resolution: 128 x 160 px
- Chipset:
- CPU: SC6531DA
- Memory:
- RAM: 32MB
- ROM: 32MB
- Micro SDHC Slot (up to 8GB)
- **Camera:**
- Rear: 0.08 Mpx (VGA)
- Network/Connectivity:
- GSM Band 850/900/1800/1900MHz
- Bluetooth 2.1
- **Features:**
- Torch Light
- FM Radio
- Vibration Motor
- Video and Music Player
- Keypad Lock
- **Others:**
- Micro USB
- Battery: Li-Ion 800mAh
- Dimensions: 113 x 48 x 13.2 mm
- Weight: 75 g
- **Accessories:**
- AC Adaptor, User Manual

800 mAh ***BT 2.1*** **128 x 160** **1,7" TFT**

ELEMENT P007
MOBILE PHONE

- **Display:**
- Size: 2.2" TFT
- Resolution: 240 x 320 px
- Chipset:
- CPU: MTK6261D
- **Memory:**
- RAM: 32MB
- ROM: 32MB
- Micro SDHC Slot (up to 8GB)
- **Camera:**
- Rear: 0.3 Mpx
- Network/Connectivity:
- GSM Dual Band 850/900/1800/1900 MHz
- Bluetooth 3.0
- **Features:**
- IP 68 Protection
- FM Radio
- Torch Light
- Vibration Motor
- Video and Music Player
- Keypad Lock
- **Others:**
- Micro USB 2.0
- Battery: Li-Ion 1000mAh
- Dimensions: 120 x 52 x 11 mm
- Weight: 114 g
- **Accessories:**
- AC Adaptor, Screwdriver, User Manual

1000 mAh ***BT 3.0*** ***240 x 320*** **2,2" TFT**

2,4" TFT 240 x 320 BT 2.1 2000 mAh

ELEMENT P004
MOBILE PHONE

- **Display:**
- Size: 2.4" TFT
- Resolution: 240 x 320 px
- Chipset:
- CPU: MTK6261D
- **Memory:**
- RAM: 32MB
- ROM: 32MB
- Micro SDHC Slot (up to 8GB)
- **Camera:**
- Rear: 0.08 Mpx (VGA)
- Network/Connectivity:
- GSM Dual Band 900/1800MHz
- Bluetooth 2.1
- **Features:**
- FM Radio
- Torch Light
- Vibration Motor
- Video and Music Player
- Keypad Lock

1,7" TFT 128 x 160

ELEMENT P001
MOBILE PHONE

- **Display:**
- Size: 1.77" (Color TFT LCD)
- Resolution: 128 x 160 px
- Chipset:
- CPU: MTK 6260M
- **Memory:**
- Micro SDHC slot (up to 16GB)
- Network/Connectivity:
- GSM Dual Band 850/900/1800/1900MHz
- **Features:**
- Video Player
- FM Radio
- DUAL SIM Standby
- SOS Emergency Key
- Keypad Lock
- Fast Call Keys
- Torch Light
- **Others:**
- Micro USB 2.0

ELEMENT MINI
MOBILE PHONE

- Element MINI telephone is about the size of a credit card with a thickness of only 4.5 mm. It is ideal for situations where you do not want to carry with you big or expensive smartphones. When using one number for two SIM cards you do not need to change the SIM card from one phone to another - you just turn the phone on (for more information on this service, contact your operator). Element MINI can be used as a handset for your smartphone via Bluetooth so that you can leave it safely in your work bag or backpack, for example during a mountain hike. A single charge lasts 2-7 days (depending on the use of the device).
- **Display:**
- Size: 0.96"
- Resolution: 128 x 64 px
- Chipset:
- CPU: MTK6261D
- **Memory:**
- RAM: 32MB
- ROM: 32MB
- Network/Connectivity:
- GSM Band 900/1800MHz
- Bluetooth

ELEMENT P031
MOBILE PHONE

- **Display:**
- Size: 2.4" TFT
- Resolution: 240 x 320 px
- Chipset:
- CPU: SC6531
- **Memory:**
- RAM: 64MB
- ROM: 64MB
- Micro SDHC Slot (up to 8GB)
- **Camera:**
- Rear: 0.3 Mpx (VGA)
- Network/Connectivity:
- GSM Dual Band 900/1800MHz
- Bluetooth 2.0
- **Features:**
- Notification Symbols (Call, Message, Battery)
- FM Radio

800 mAh BT 2.0 240 x 320 2,4" TFT

ELEMENT P008
MOBILE PHONE

- **Display:**
- Size: 1.77" TFT
- Resolution: 176 x 144 px
- Chipset:
- CPU: SC6531
- **Memory:**
- RAM: 32MB
- ROM: 32MB
- Micro SDHC Slot (up to 8GB)
- **Camera:**
- Rear: 0.08Mpx (VGA)
- Network/Connectivity:
- GSM Dual Band 900/1800MHz
- Bluetooth 2.1
- **Features:**
- FM Radio
- Vibration Motor

600 mAh BT 2.1 **176 x 144 1,7" TFT**

ELEMENT P006
MOBILE PHONE

- **Display:**
- Size: 2.4" TFT
- Resolution: 240 x 320 px
- Chipset:
- CPU: MTK6261D
- **Memory:**
- RAM: 32MB
- ROM: 32MB
- Micro SDHC Slot (up to 8GB)
- **Camera:**
- Rear: 0.08Mpx (VGA)
- Network/Connectivity:
- GSM Dual Band 850/900/1800/1900MHz
- **Features:**
- FM Radio
- Torch Light
- Vibration Motor

700 mAh ***240 x 320 2,4" TFT***

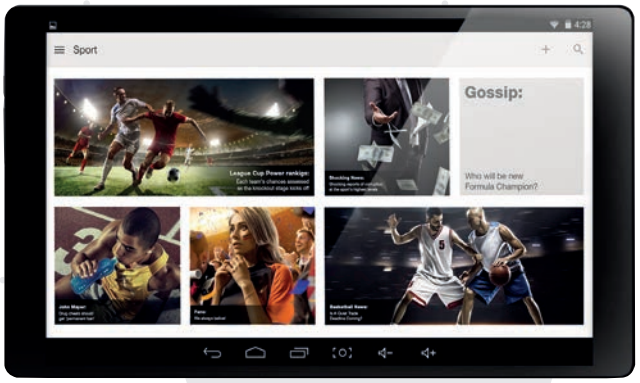

SENCOR 10.1Q102

TABLET

- **Display:**
- Display Size: 10.1" IPS Technology
- Resolution: HD 1280 x 800 Pixels 16:10
- Acceleration Sensor, Gravity sensor
- Chipset and Memory
- CPU: Rockchip 3126 (Quad Core 1.2Ghz)
- GPU: Mali-400MP2
- RAM Memory: 1GB DDR3
- Flash Memory: 16GB E-NAND
- Micro SDHC slot (up to 64GB)
- Camera
- Front Camera: 0.3MP
- Rear Camera: 2MP
- Network/Connectivity
- WiFi: 2.4GHz (802.11 b/g/n)
- Bluetooth: BT 4.0
- Audio-Video Supported Formats
- Video: MPEG-4 H.264/H.263, AVI, MKV, WMV, MOV, MP4, FLV, MPG, etc.
- Audio: MP3, WAV, AAC, AMB, FLAC, etc.
- **Picture:** JPEG, BMP, GIF, PNG, etc.
- Others
- OS: Android 7.1.2
- Supported Android Applications (via Google Play)
- Jack 3.5mm
- MicroUSB 2.0 (OTG Support / USB Host)
- Battery: 5000mAh Li-Pol Battery
- **Power:** 5V 2A
- Dimensions: 254.5 x 153 x 9.3 mm
- Weight: 511g (including battery)
- Accessories: Micro USB Cable, AC Adaptor

New 10.1"

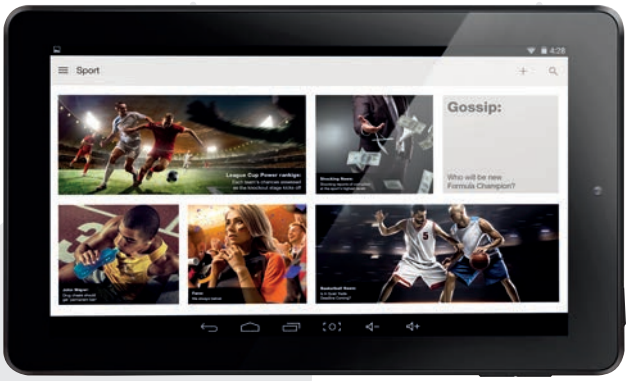

SENCOR 7Q105

TABLET

- **Display:**
- Display Size: 7" IPS Technology
- Resolution: HD 1024 x 600 Pixels 16:9
- Acceleration Sensor, Gravity sensor
- Chipset and Memory
- CPU: Rockchip 3126 (Quad Core 1.2Ghz)
- GPU: Mali-400MP2
- RAM Memory: 1GB DDR3
- Flash Memory: 16GB E-NAND
- Micro SDHC slot (up to 64GB)
- Camera
- Front Camera: 0.3MP
- Rear Camera: 2MP
- Network/Connectivity
- WiFi: 2.4GHz (802.11 b/g/n)
- Bluetooth: BT 4.0
- Audio-Video Supported Formats
- Video: MPEG-4 H.264/H.263, AVI, MKV, WMV, MOV, MP4, FLV, MPG, etc.
- Audio: MP3, WAV, AAC, AMB, FLAC, etc.
- **Picture:** JPEG, BMP, GIF, PNG, etc.
- Others
- OS: Android 7.1.2
- Supported Android Applications (via Google Play)
- Jack 3.5mm
- MicroUSB 2.0 (OTG Support / USB Host)
- Battery: 2000mAh Li-Pol Battery
- **Power:** 5V 1.5A
- Dimensions: 111.2 x 186 x 10 mm
- Weight: 271g (including battery)
- Accessories: Micro USB Cable, AC Adaptor

New 7"

SCO 516 WH
SCO 516 BL
SCO 516 RD
SCO 516 BK

ACCESSORIES

- USB KIT
- 1m USB cable 2.0 A/M -Micro B/M
- Wall Charger 1xUSB: 2000 mA
- Car Carger 1xUSB: 2000 mA
- Specifications
- Wall Charger
- Input: 100-240V AC; 50/60Hz; 350mA
- Output: DC 5V; 2A
- Car Charger
- Input: 12-24V DC
- Output: DC 5V; 2A

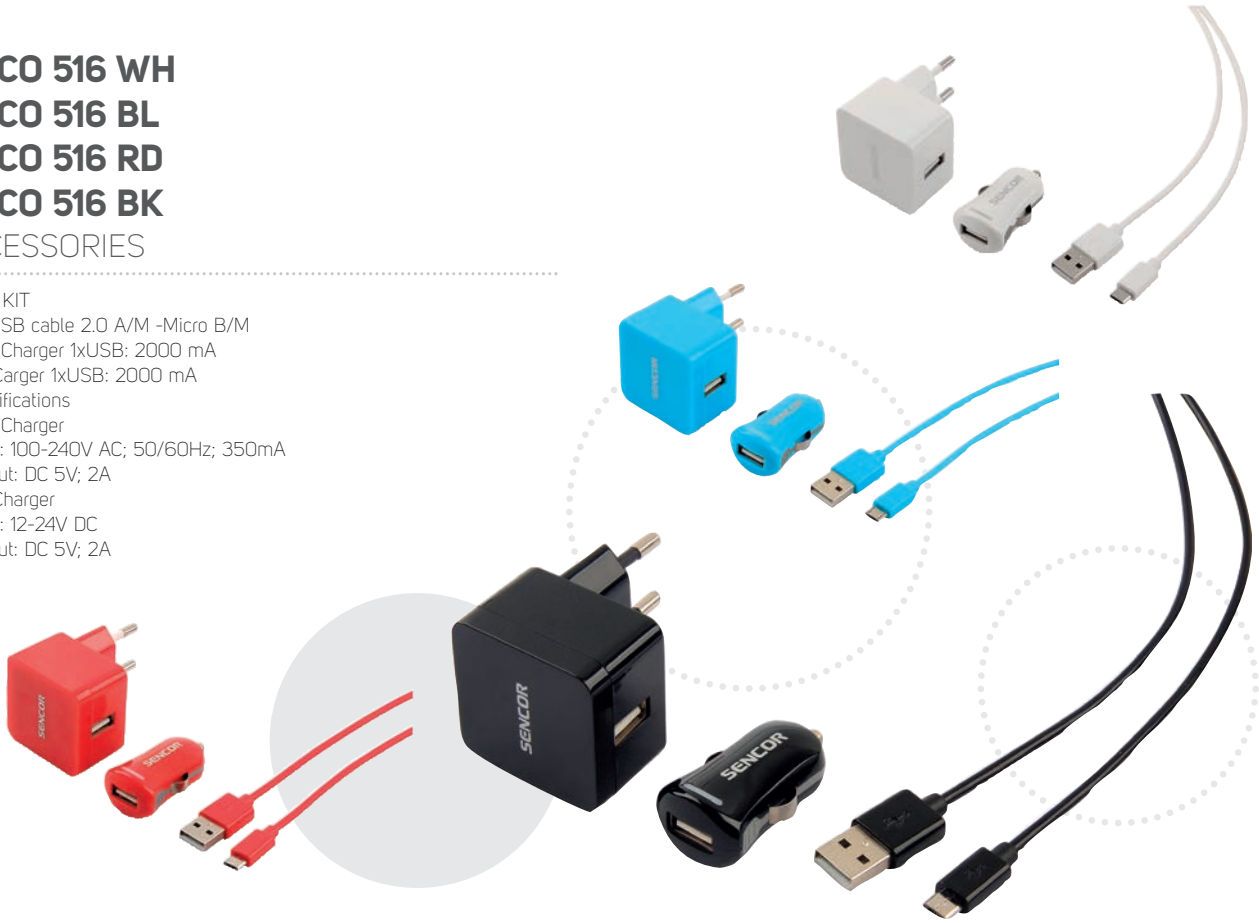

SCO 515 WH
SCO 515 BK

ACCESSORIES

- USB KIT
- 1m USB cable 2.0 A/M -Micro B/M
- Wall Charger 1xUSB: 1000 mA
- Car Carger 1xUSB: 1000 mA

MODEL	Sencor P5700	Sencor P5504	Element P031	Element P008	Element P006
Display size	5,7"(resolution 1440x720)	5,5"(resolution 1280x720)	2,4"(resolution 240x320)	1,77"(resolution 176x144)	2,4"(resolution 240x320)
Touch display	Full lamination on cell - IPS	Full lamination IPS	TFT LCD	TFT LCD	TFT LCD
CPU	MTK MT6737	MTK MT6737	SC6531	SC6531DA	MTK6261D
GPU	Mali-720	Mali-720	-	-	-
RAM	2GB	2GB	64MB	32MB	32MB
Operation system	Android 7.0	Android 7.0	-	-	-
Integrated memory	16 GB	16 GB	-	-	-
Card slot	micro SDHC (max 64GB)	micro SDHC (max 64GB)	micro SDHC (max 8GB)	micro SDHC (max 8GB)	micro SDHC (max 8GB)
Camera resolution	13MPx	13MPx	0,3MPx	0,08 Mpx (VGA)	0,08MPx VGA
Flash	Yes	Yes	No	No	No
ZOOM	Yes	Yes	No	No	No
Connectivity	Bluetooth	Bluetooth	Bluetooth	Bluetooth	Bluetooth
Player	Yes	Yes	Yes	Yes	Yes
FM tuner	Yes	Yes	Yes	Yes	Yes
GPS modul	Yes	Yes	No	No	No
Data transfer	Yes	Yes	No	No	No
Dual SIM	Yes	Yes	Yes	Yes	Yes
Connector 3,5 mm	Yes	Yes	Yes	No	Yes
Battary capacity	3000mAH	3000mAH	800mAh	600mAh	700 mAh
Construction	Touch	Touch	Clamshell	Clamshell	Clamshell
Increased resistance	No	No	No	No	No
Height (mm)	154,5	155,5	103,5	95	104
Width (mm)	72,8	77,5	53	46	53
Depth (mm)	8,5	9,2	13,5	16	18,5
Weight (g) including battery	186	180	114	73	95
Color	Black	Black	Black	Black	Black

color

MODEL	Element P030	Element P020	ElementP009	Element P007	Element P004	Element P001	Element Mini
Display size	2,8"(resolution 240x320)	2.4"(resolution 240x320)	1,77"(resolution 128x160)	2,2"(resolution 240x320)	2.4"(resolution 240x320)	1,77" (resolution 128 x 160)	0,96 " (resolution 128xx64)
Touch display	TFT LCD	TFT LCD	TFT LCD	TFT LCD	TFT LCD	TFT LCD	-
CPU	MTK 6261D	MTK6260D	SC6531DA	MTK6261D	MTK6261D	MTK 6260M	MTK6261D
GPU	-	-	-	-	-	-	-
RAM	32MB	32MB	32MB	32MB	32MB	32MB	32MB
Operation system	-	-	-	-	-	-	-
Integrated memory	-	-	-	-	-	-	32MB
Card slot	micro SDHC (max 8GB)	micro SDHC (max 8GB)	micro SDHC (max 8GB)	micro SDHC (max 8GB)	micro SDHC (max 8GB)	micro SDHC (max 16GB)	No
Camera resolution	0,3MPx	VGA	0,08 Mpx (VGA)	0,3MPx	VGA	No	No
Flash	No	No	No	No	No	No	No
ZOOM	No	No	No	No	No	No	No
Connectivity	Bluetooth	Bluetooth	Bluetooth	Bluetooth	Bluetooth	-	Bluetooth
Player	Yes	Yes	Yes	Yes	Yes	Yes	No
FM tuner	Yes	Yes	Yes	Yes	Yes	Yes	No
GPS modul	No	No	No	No	No	No	No
Data transfer	No	No	No	No	No	No	No
Dual SIM	Yes	Yes	Yes	Yes	Yes	Yes	No
Connector 3,5 mm	Yes	Yes	No	No	No	Yes	No
Battary capacity	1500mAh	500mAh	800mAh	1000mAh	2000 mAh	600 mAh	320mAh
Construction	Classic	Classic	Classic	Classic	Classic	Classic	Classic
Increased resistance	No	No	No	Yes	No	No	No
Height (mm)	132	122	113	120	124	114	53
Width (mm)	57,5	51,5	48	53	52	51,4	85
Depth (mm)	10,8	11,3	13,2	11	11,4	13,6	4,5
Weight (g) including battery	93	179	75	114	149	109	28
Color	Black	Silver	Black	Black	Black	Black	Black, White



Home multimedia

39 MULTIMEDIA CENTRES
40 TABLE DVD
41 PORTABLE DVD
44 PORTABLE TV

SMP 9004 PRO
MULTIMEDIA PLAYER

- Features:
- KODI Home Theater System Integrated
- 4K Movie Playback
- 3D Movie Playback
- Dual Band WiFi Module 2.4GHz + 5GHz (802.11 ac/a/b/g/n)
- WiFi Hotspot
- Bleutooth 4.0
- DLNA Entertainment Sharing/DLNA server
- Miracast
- Web Browser (support HTML 5)
- Subtitle Multi Feature Setting (Size, Color, Position, Sync, Outline Color)
- Integrated Android 6.0.1 (32bit)
- Chipset and Memory:
- Processor: Amlogic S912 Octa core Cortex A53 1.5GHz
- GPU: ARM Mali-T820 MP3 GPU up to 750MHZ/DVFS

Andriod 6.0.1 **DLNA** **BT 4.0**

SMP 5004 PRO
MULTIMEDIA PLAYER

- Features:
- KODI Home Theater System Integrated
- 4K Movie Playback
- 3D Movie Playback
- WiFi Module 2.4GHz (802.11 b/g/n)
- WiFi Hotspot
- Bleutooth 4.0
- DLNA Entertainment Sharing / DLNA server
- Miracast
- Web Browser (support HTML 5)
- Subtitle Multi Feature Setting (Size, Color, Position, Sync, Outline Color)
- Integrated Android 6.0.1 (32bit)
- Chipset and Memory:
- Processor: Amlogic S905X Quad core Cortex A53 64bit 2GHz
- GPU: Penta-core Mali-450MP GPU @ 750MHz

Andriod 6.0.1 **DLNA** **BT 4.0**

SMP 5001 PRO
MULTIMEDIA PLAYER

- Features:
- KODI Home Theater System Integrated
- 3D Movie Playback
- WiFi Module 2.4GHz (802.11 b/g/n)
- WiFi Hotspot
- DLNA Entertainment Sharing
- Miracast
- Web Browser (support HTML 5)
- Subtitle Multi Feature Setting (Size, Color, Position, Sync, Outline Color)
- Integrated Android 5.1
- Chipset and Memory:
- Processor: Amlogic S805 QUAD CORE ARM Cortex A5 (1.5GHz)
- GPU: OCTA CORE Mali-450MP (600MHz, 3D Graphics Acceleration)
- RAM: 1GB DDRIII
- Flash Memory: 8GB NAND Flash

Andriod 5.1 **DLNA** **BT 4.0**

SDV 7406H
DVD PLAYER

- USB - Playback
- Playback Disc Formats: DVD-VIDEO, DVD±R/RW, CD, CD-R/RW
- Video Formats: MPEG-1(VCD), MPEG-2(SVCD, DVD), MPEG-4, DIVX (3.x, 4.x, 5.x, 6.x), XVID, Picture CD
- Audio Formats: MPEG1, AC3, MP3, MP3-PRO, HDCD, CD-G
- Dolby Digital 2.0
- Dolby Digital AC-3, MPEG multichannel Compatible
- 16:9/4:3, PAL/NTSC Compatible
- External Subtitles Support
- ZOOM
- Front USB Connection
- Rear Connections: HDMI, Coaxial Out
- Power: 100-240 V ~ 50/60 Hz
- Max. Power Consuption: 15 W / <1 W (Stand-By Mode)
- Dimension: (WxHxD): 430x38x185 mm
- Weight: 2 kg

SDV 2512H
DVD PLAYER

- USB - Playback
- Playback Disc Formats: DVD-VIDEO, DVD±R/RW, CD, CD-R/RW
- Video Formats: MPEG-1(VCD), MPEG-2(SVCD, DVD), MPEG-4, XVID, Picture CD
- Audio Formats: MP3
- Dolby Digital 2.0
- 16:9/4:3, PAL/NTSC Compatible
- External Subtitles Support
- Multi-language OSD Menu
- Front USB Connection
- Rear Connections: HDMI, SCART, AV Out (CINCH)
- Power: 100-240 V ~ 50/60 Hz
- Max. Power Consuption: 15 W / <1 W (Stand-By Mode)
- Dimension: (WxHxD): 225x40x200 mm
- Weight: 0,9 kg

SDV 1204H
DVD PLAYER

- USB - Playback
- SCART output
- Playback Disc Formats: DVD-VIDEO, DVD±R/RW, CD, CD-R/RW
- Video Formats: MPEG-1(VCD), MPEG-2(SVCD, DVD), MPEG-4, XVID, Picture CD
- Audio Formats: MP3
- Dolby Digital 2.0
- 16:9/4:3, PAL/NTSC Compatible
- External Subtitles Support
- Multi-language OSD Menu
- Front USB Connection
- Rear Connections: SCART
- Power: 100-240 V ~ 50/60 Hz
- Max. Power Consuption: 15 W / <1 W (Stand-By mode)
- Dimension: (WxHxD): 225x40x200 mm
- Weight: 0,7 kg

SPV 7972
PORTABLE DVD PLAYER

- **Display:**
- Two 9" TFT LCD Displays
- Resolution: 800x480 px
- DVB-T (MPEG4) Tuner
- **Supported formats:**
- DVD±R/RW, CD, CD-R/RW
- MPEG-1 (VCD), MPEG-2 (SVCD, DVD), MPEG-4, XviD
- JPEG, MP3
- Subtitles (SUB, SRT, TXT)
- **Inputs and outputs:**
- USB (Up To 32 GB)
- SD (Up To 32 GB)
- Audio/Video Output (Jack 3.5 mm)
- **Other:**
- Built-In Stereo Speakers, Dolby Digital
- AntiShock Memory
- Multi-Language Menu
- Parental Control
- Built-in Li-Ion Battery 1200 mAh
- Power Supply: 9V / 1.5A DC
- Main Unit Size: 224 x 170 x 37 mm
- Monitor Unit Size: 224 x 170 x 21.5 mm
- Accessory:
- Antenna, Connection Cable, Car Charger, Power Adapter, Remote Control, Instruction Manual

Dolby Digital **800 x 480** CERTIFIED USB **Dual** **9" LCD**

SPV 7971
PORTABLE DVD PLAYER

- **Display:**
- Two 9" TFT LCD Displays
- Resolution: 800x480 px
- **Supported formats:**
- DVD±R/RW, CD, CD-R/RW
- MPEG-1 (VCD), MPEG-2 (SVCD, DVD), MPEG-4, XviD
- JPEG, MP3
- Subtitles (SUB, SRT, TXT)
- **Inputs and outputs:**
- USB (Up To 32 GB)
- SD (Up To 32GB)
- Audio/Video Output (Jack 3.5mm)
- **Other:**
- Built-In Stereo Speakers, Dolby Digital
- AntiShock Memory
- Multi-Language Menu
- Parental Control
- Built-in Li-Ion Battery 1000mAh
- Power Supply: 9V / 1.5A DC
- Main Unit Size: 224 x 170 x 37 mm
- Monitor Unit Size: 224 x 170 x 21.5 mm
- Accessory:
- Connection Cable, Car Charger, Power Adapter, Remote Control, Instruction Manual

Dolby Digital **800 x 480** CERTIFIED USB **Dual** **9" LCD**

SPV 7926

PORTABLE DVD PLAYER

- **Display:**
- 9" TFT LCD Rotating Display
- Resolution: 800x480 Pixels
- **Supported formats:**
- DVB-T (MPEG4) Tuner
- DVD±R/RW, CD, CD-R/RW
- MPEG-1 (VCD), MPEG-2 (SVCD, DVD), MPEG-4, XviD
- Picture CD, JPEG, MP3
- Subtitle Support (SUB, SRT, TXT)
- **Inputs and outputs:**
- USB Input (Supported up to 32 GB)
- SD Card Slot (Supported up to 32GB)
- Audio/Video Output (Jack 3.5mm)
- Headphones Output (Jack 3.5mm)
- HDMI Out
- **Other:**
- Built-in Li-Ion Battery 1000mAh
- **Accessory:** Antenna, Car Charger, Power Adapter, Remote Control, Instruction Manual, Car Case
- Power Supply: 9V / 1.5A DC
- **Dimension:** 275 x 108 x 235 mm
- **Weight:** 1.37 kg

9" LCD CERTIFIED USB **800 x 480** **Dolby Digital**

SPV 7772

PORTABLE DVD PLAYER

- **Display:**
- Two 7" TFT LCD Displays
- Resolution: 800 x 480 px
- **Supported formats:**
- DVB-T (MPEG4) Tuner
- DVD±R/RW, CD, CD-R/RW
- MPEG-1 (VCD), MPEG-2 (SVCD, DVD), MPEG-4, XviD
- JPEG, MP3
- Subtitle Support (SUB, SRT, TXT)
- Dolby Digital (AC-3) Decoder
- **Inputs and outputs:**
- USB (Up to 32 GB)
- SD (Up to 32 GB)
- Audio/Video Output (3,5 mm Jack)
- **Other:**
- Built-In Stereo Speakers, Dolby Digital
- AntiShock Memory
- Built-in Li-Ion Battery 1200 mAh
- **Accessory:**
- 2x Headphones, Car Charger, Power Adapter, Remote Control, Instruction Manual

7" LCD **Dual** CERTIFIED USB **800 x 480** **Dolby Digital**

● SPV 2920 BLACK
● SPV 2920 DARK ROSE
PORTABLE DVD PLAYER

- **Display:**
- 9" TFT LCD Display with LED Backlight
- Resolution: 800x480 px
- Swivel Screen Design
- **Supported formats:**
- DVD±R/RW, CD, CD-R/RW
- MPEG-1 (VCD), MPEG-2 (SVCD, DVD), MPEG-4, XviD
- CD, JPEG, AC3, MP3
- Subtitle Support (SUB, SRT, TXT)
- **Inputs and outputs:**
- USB (Up to 32 GB)
- Audio/Video Output (Jack 3.5mm)
- **Other:**
- Built-In Stereo Speakers, Dolby Digital
- AntiShock Memory
- Multi-Language Menu
- Built-in Li-Ion Battery 1000 mAh
- Power supply: 9 V / 1 A
- **Dimension:** 216x40x170 mm
- Weight: 762 g
- **Accessory:**
- Power Adapter, Car Charger, Remote Control, Instruction Manual

Dolby Digital **800 x 480** CERTIFIED USB **9" LCD**

● SPV 2722 BLACK
○ SPV 2722 WHITE
PORTABLE DVD PLAYER

- **Display:**
- 7" TFT LCD Display with LED Backlight
- Resolution: 800x480 px
- Swivel Screen Design
- **Supported formats:**
- DVD±R/RW, CD, CD-R/RW
- MPEG-1 (VCD), MPEG-2 (SVCD, DVD), MPEG-4, XviD
- CD, JPEG, AC3, MP3
- Subtitle Support (SUB, SRT, TXT)
- **Inputs and outputs:**
- USB (Up to 32 GB)
- Audio/Video Output (Jack 3.5mm)
- **Other:**
- Built-In Stereo Speakers, Dolby Digital
- AntiShock Memory
- Multi-Language Menu
- Parental Control
- Built-in Li-Ion Battery
- Maximum Playback Time 2h
- Power supply: 9 V / 1 A
- **Accessory:**
- Power Adapter, Remote Control, Battery, Instruction Manual

Dolby Digital **800 x 480** CERTIFIED USB **7" LCD**

10,1" LCD CERTIFIED USB **1024 x 600** **Dolby Digital**

SPV 7011
PORTABLE TV

- **Display:**
- 10.1" Portable LCD TV
- Resolutions: 1024x600 px
- Built-In TV Tuner HD DVB-T
- **Supported formats:**
- MPEG2, MPEG4, XviD
- MP3
- JPEG
- **Inputs and outputs:**
- USB (Up to 32 GB)
- Coaxial
- Audio/Video Output (Jack 3.5mm)
- HDMI 1.4 Output
- **Other:**
- Built-In Stereo Speakers 2x 1.5 W, Dolby Digital
- Built-in Lithium-Polymer Baterry (2200mAh)
- Supply Voltage: =12V
- **Dimensions:** 245x158x27 mm
- **Weight:** 0,59kg

MODEL	SPV 7972	SPV 7971	SPV 7926
Diagonal in inch / cm	9" / 23cm	9" / 23cm	9" / 23cm
TV tuNor	DVB-T	No	DVB-T
DVD drive	Yes	Yes	Yes
DivX support	Yes	Yes	No
USB	Yes	Yes	Yes
Playback from USB	Video/Foto/MP3	Video/Foto/MP3	Video/Foto/MP3
TV broadcasting record on USB	Yes	No	No
Card slot	SD/SDHC	SD/SDHC	SD
HeadphoNo conNoction	Yes	Yes	Yes
Car holder	No	No	Yes
Car adapter	Yes	Yes	Yes

color

color

MODEL	SPV 7772	SPV 2920	SPV 2722
Diagonal in inch / cm	7" / 18cm	9" / 23cm	7" / 18 cm
TV tuNor	DVB-T	No	No
DVD drive	Yes	Yes	Yes
DivX support	Yes	Yes	Yes
USB	Yes	Yes	Yes
Playback from USB	Video/Foto/MP3	Video/Foto/MP3	Video/Foto/MP2
TV broadcasting record on USB	Yes	No	No
Card slot	SD/SDHC	No	No
HeadphoNo conNoction	Yes	Yes	Yes
Car holder	No	No	No
Car adapter	Yes	Yes	No

Audio

47 BLUETOOTH REPRODUCTORS
51 AUDIO SYSTEMS
54 MICROSYSTEMS
56 TURNTABLES
59 INTERNET RADIOS
60 CD PLAYERS
66 PORTABLE RADIOS
69 RADIO CLOCKS
71 MP3 PLAYERS
73 EARPHONES/HEADPHONES
76 MICROPHONES

SSS 81

BLUETOOTH REPRODUCTOR

- SSS 81 is the smallest SENCOR wireless speaker. With a built-in 2000mAh rechargeable battery can play music up to 12 hours at medium volume level. Two stereo speakers and two passive bass radiators with a maximum power of 10W take care of the quality sound. You can enjoy your favorite music via Bluetooth wireless access with range up to 20 meters, USB stick, harddrive, memory card or another device with a 3.5mm Jack connector.
- LED Display
- Small Size with Power Sound
- Amplifier Class D (for rich sound and optimum performance with minimum energy consumption)
- Built-in Rechargeable Battery
- **Sound:**
- Power Output: 2 x 5W (Impedance: 4Ω)
- Frequency Response: 65Hz - 18.5KHz
- Total Harmonic Distortion: ≤0.5% (1KHz 1W)
- 2 Speakers (Stereo) + 2 Passive Radiators
- **Inputs:**
- Bluetooth Audio 2.0
- FM PLL Radio
- Audio Aux Input (3.5mm Stereo Jack)
- Micro SD (Supported up to 32GB)
- USB
- **Others:**
- Alarm
- Built-in Battery: 2000 mAh Li-Ion
- USB Charging Slot (5V / min 500 mA)
- Dimension: 223 x 70 x 71mm
- Weight: 0.7kg

BT 2.0 **LED display** **2 x 5 W**

SSS 101

BLUETOOTH REPRODUCTOR

- SSS 101 is a portable wireless speaker from SENCOR range. With a built-in 2000mAh rechargeable battery can play music up to 12 hours at medium volume level. Two stereo speakers and two passive bass radiators with a maximum power of 10W take care of the quality sound. You can enjoy your favorite music via Bluetooth wireless connection with range up to 20 meters, USB stick, harddrive, memory card or another device with a 3.5mm Jack connector.
- LED Display
- Lightweight and Compact Design
- Amplifier class D (for rich sound and optimum performance with minimum energy consumption)
- Built-in rechargeable battery
- **Sound:**
- Power Output: 2 x 5W (Impedance: 4Ω)
- Frequency Response: 65Hz - 18KHz
- Total Harmonic Distortion: ≤0.5% (1kHz 1W)
- 2 Speakers (Stereo) + 2 Passive Radiators
- **Inputs:**
- Bluetooth Audio 2.0
- FM PLL Radio
- Audio Aux Input (3.5mm stereo Jack)
- Micro SD (supported up to 32GB)
- USB
- **Others:**
- Built-in battery: 2000mAh Li-Ion
- USB Charging (5V / min. 500mA)
- Dimension: 241 x 138 x 72mm
- Weight: 0.9kg

BT 2.0 **LED display** **2 x 5 W**

SSS 1050 RED
SSS 1050 GREEN
SSS 1050 BLACK
SSS 1050 BLUE

BLUETOOTH REPRODUCTOR

- SSS 1050 is a compact waterproof speaker, with which you can enjoy your favorite music from smartphone or tablet via Bluetooth wireless access with connection distance up to 15m. Two speakers with a maximum power of 5W, will take care of the powerful and clear sound. The speaker construction is designed for against rain or splashing water. Dont be afraid to listen to music in adverse weather or next by the pool. You can listen music up to 13 hours with a large in-bult rechargeable battery. The speaker is equipped with a 1/4 "thread that can be attached to a bicycle, boat, or wherever you want. SSS 1050 can be the perfect partner for any situation and wherever you go.
- Splash Proof Construction with IPX5
- Amplifier class D (for rich sound with minimum energy consumption)
- Built-in rechargeable battery
- **Sound:**
- Power Output: 5W (Impedance: 4#)
- Frequency Response: 180Hz - 18KHz
- Total Harmonic Distortion: #1%
- 1 Speaker + 1 Passive Radiator
- **Inputs:**
- Bluetooth Audio 4.1
- Connection Distance up to 15m
- Audio Aux Input (3.5mm stereo Jack)
- **Others:**
- 1/4" Screw-thread for Attaching
- Handsfree Function
- Built-in battery: 1500mAh Li-Ion

5 W **BT 4.1**

SSS 1100 BLACK
SSS 1100 RED
SSS 1100 GREEN
SSS 1100 BLUE

BLUETOOTH REPRODUCTOR

- SSS 1100 is a compact waterproof speaker, with which you can enjoy your favorite music from smartphone or tablet via Bluetooth wireless access with connection distance up to 15m. Three speakers with a maximum power of 10W, will take care of the powerful and clear sound. The speaker construction is designed for against rain or splashing water. Dont be afraid to listen to music in adverse weather or next by the pool. You can listen music up to 13 hours with a large in-bult 2000mAh rechargeable battery. The speaker is equipped with a 1/4 "thread that can be attached to a bicycle, boat, or wherever you want. SSS 1100 can be the perfect partner for any situation and wherever you go.
- Splash Proof Construction with IPX5
- Amplifier class D (for rich sound with minimum energy consumption)
- Built-in rechargeable battery
- **Sound:**
- Power Output: 10W (Impedance: 4#)
- Frequency Response: 150Hz - 18KHz
- Total Harmonic Distortion: #1%
- 2 Speakers + 1 Passive Radiator
- **Inputs:**
- Bluetooth Audio 4.1
- Connection Distance up to 15m
- Audio Aux Input (3.5mm stereo Jack)
- **Others:**
- 1/4" Screw-thread for Attaching
- Handsfree Function
- Built-in battery: 2000mAh Li-Ion
- Playback Time up to 13 Hours
- Micro USB Charging
- Charging Time max 5 Hours

10 W **BT 4.1**

SSS 6200N BEIGE
SSS 6200N BLACK
BLUETOOTH REPRODUCTOR

- SSS 6200N is a compact premium speaker, with which you can enjoy your favorite music from smartphone or tablet via Bluetooth wireless access with connection distance up to 15m. Four speakers with a maximum power of 20W and Equalizer selection directly on speaker, will take care of the powerful and clear sound. You can listen music up to 8 hours with a large in-bult 5000mAh rechargeable battery. The speaker is equipped with NFC technology, which allows easy and quick connection with your phone. The stylish look of the speaker has won the prestigious Reddot Design Award 2016. SSS 6200N can be the perfect partner for any situation and wherever you go.
- Aluminium Body with Premium Fabric Speaker Cover
- NFC Easy Connection
- Digital Sound Processor DSP
- Winner of the Reddot Desing Award 2016
- **Sound:**
- Power Output: 20W (Impedance: 4ohm)
- Frequency Response: 120Hz - 18KHz
- Total Harmonic Distortion: 1%
- 2 Speakers + 2 Passive Radiators
- **Inputs:**
- Bluetooth Audio 4.1
- Connection Distance up to 15m
- Audio Aux Input (3.5mm stereo Jack)
- **Others:**
- Amplifier class D (for rich sound with minimum energy consumption)
- Handsfree Function
- Built-in battery: 5000mAh Li-Ion
- Playback Time up to 8 Hours
- Micro USB Charging

BT 4.1 20 W

SSS 6300N
BLUETOOTH REPRODUCTOR

- SSS 6300N is a compact waterproof speaker, with which you can enjoy your favourite music from smartphone or tablet via Bluetooth wireless access with connection distance up to 15m. Two speakers with a maximum power of 24W and two passive radiators, will take care of the powerful and clear sound. The speaker is equipped with NFC technology, which allows easy and quick connection with your smartphone and TWS technology, which allows connect two speakers together. The speaker construction is fully-waterproof, so it can be dive to a depth of 1m for 30 minutes. Don't be afraid to listen to music in adverse weather or next by the pool. You can listen music up to 7 hours with a large in-built 5000mAh rechargeable battery. You can also use speaker like Powerbank, so your smartphone or tablet can be charging directly from device. Unique SSS 6300N SIRIUS can be the perfect partner for any situation and wherever you go.
- Features:
- Water Proof Construction with IPX7
- Premium Fabric Speaker Cover
- NFC Easy Connection
- TWS Function (True Wireless Stereo)
- EXTRA BASS Function
- Powerbank function
- **Sound:**
- Power Output: 24W (2x12W, Impedance: 4Ω)
- 2 Speakers + 2 Passive Radiators
- Digital Sound Processor DSP
- Frequency Response: 20Hz - 16KHz
- Total Harmonic Distortion: ≤1%
- **Inputs:**
- Bluetooth Audio 4.2
- Connection Distance up to 15m
- Audio Aux Input (3.5mm stereo Jack)
- USB Charging 1A
- **Others:**
- Carabiner for Easy Handle

BT 4.2 24 W

60 W ***BT 2.1***

SSS 6500N

BLUETOOTH REPRODUCTOR

- Wireless speaker SSS 6500N sounds small or bigger places according your ideas. Speaker is covered by premium fabric for minimize sound distortion and top panel is made from brushed aluminum to connection with modern interior. System DSP provide completely new standards for dynamic, purity and sound quality. Two stereo mid-range and two treble speakers with a maximum power of 60W take care of the quality sound. With NFC function you can be wirelessly connected in seconds. You can enjoy your favorite music via Bluetooth wireless access with range up to 15 meters, USB stick, harddrive or another device with a 3.5mm Jack connector. The package includes remote control and 3.5mm AUX cable.
- Brushed Aluminium Top Panel and Premium Fabric Speaker Cover
- NFC Easy Connection
- Digital Sound Processor DSP
- **Sound:**
- Power Output: 60W (Impedance: 4ohm)
- Frequency Response: 50Hz - 20KHz
- Total Harmonic Distortion: 1%
- 3 Speaker (2 Mid-Range + 1 Subwoofer)
- **Inputs:**
- Bluetooth Audio 2.1
- Connection Distance up to 15m
- Audio Aux Input (3.5mm stereo Jack)
- USB Input for Playback
- **Others:**
- LED Status Indicator
- USB Charging for Mobile Devices (1A)
- **Power Supply:** AC 100-240V~50/60 Hz
- Standby Consumption: #0.5W
- Dimension: 398 x 226 x 139mm
- Weight: 3000g

70 W ***BT 4.0***

SSS 6600N

BLUETOOTH REPRODUCTOR

- Wireless speaker SSS 6600N sounds small or bigger places according your ideas. Speaker is covered by premium fabric for minimize sound distortion and stand is made from brushed aluminum to connection with modern interior. System DSP provide completely new standards for dynamic, purity and sound quality. Two stereo mid-range and two treble speakers with a maximum power of 70W take care of the quality sound. With NFC function you can be wirelessly connected in seconds. You can enjoy your favorite music via Bluetooth wireless access with range up to 15 meters, USB stick, harddrive or another device with a 3.5mm Jack connector. The package includes remote control and 3.5mm AUX cable.
- Brushed Aluminium Stand and Premium Fabric Speaker Cover
- NFC Easy Connection
- Digital Sound Processor DSP
- **Sound:**
- Power Output: 70W (Impedance: 4 Mid-range, 6 Subwoofer)
- Frequency Response: 50Hz - 20KHz
- Total Harmonic Distortion: 1%
- 3 Speaker (2 Mid-Range + 1 Subwoofer)
- **Inputs:**
- Bluetooth Audio 4.0
- CSR Bluetooth Chip (For Cleaner, More Stable and Better Sound Transmission)
- Connection Distance up to 15m
- Audio Aux Input (3.5mm stereo Jack)
- USB Input for Playback
- **Others:**
- LED Status Indicator
- Support Hands-free Calling
- USB Charging for Mobile Devices (1A)
- **Power Supply:** AC 100-240V~50/60 Hz
- Standby Consumption: 0.5W
- Dimension: 539 x 170 x 219mm
- Weight: 3800g

SSS 4001
AUDIO SYSTEM

- **Power:** 400W
- 2 Bass + 2 Treble Speakers
- Frequency Response: 40Hz - 16KHz
- Total Harmonic Distortion: #10% (1KHz 1W)
- 5 Band Graphic Equalizer
- Equalizer Modes (Pop, Funk, Rock, Jazz, Samba)
- BASS Boost Button
- 7 Colors (Blue, Green, Red, Yellow, Purple, Turquoise, White)
- 5 Flashing Modes with Possibility Turn Off Lights
- Station Presets: 50 FM
- Bluetooth Audio 2.1
- Audio Aux (3.5mm Stereo Jack)
- Micro SD (Supported up to 32GB)
- 2x USB (Playback and Charging)
- 2x Microphone Port (Jack 6.3mm)
- Karaoke (Echo, Volume)
- **Power Supply:** AC 230 V
- Energy Efficiency: <0.5W
- Dimension: 326 x 340.5 x 953 mm
- Weight: 13.9 kg

BT 2.1 ***LED display*** ***400 W***

SSS 3800
AUDIO SYSTEM

- **Power:** 60W
- LCD Display
- Flashing LED Lights
- **Sound:**
- 4 Speakers (2 Mid-Range + 2 Treble)
- Frequency Response: 40Hz-15KHz
- Total Harmonic Distortion: ≤10% (1KHz)
- Equalizer Modes (FLAT, CLASSIC, ROCK, POP, JAZZ)
- SUPER BASS Button
- **Light:**
- 7 Colors Light Show
- 5 Flashing Modes
- Reception:
- FM PLL Radio
- Station Presets: 30 FM
- **Inputs:**
- Bluetooth Audio 2.1
- Audio Aux (3.5mm Stereo Jack)
- 2x USB (Playback)
- 2x Microphone Port (Jack 6.3mm)
- **Others:**
- In-built Recheargable Battery 4000mAh
- Karaoke (Echo, Volume)
- **Power Supply:** AC 100-240V
- Energy Efficiency: <0.5W
- Dimension: 259 x 272 x 595mm
- Weight: 7.16kg
- **Accessories:**
- Wired Microphone, User Manual

BT 2.1 **60 W**



SSS 2600
AUDIO SYSTEM

- **Power:** 2 x 15W + 30W
- Holder for Smartphone or Tablet
- **Sound:**
- 2 Treble Speakers + 1 Bass
- Frequency Response: 80 Hz - 17 kHz
- Total Harmonic Distortion: L/R #5% (1 kHz), Bass #10% (65 Hz)
- Equalizer Modes: FLAT/ROCK/POP/JAZZ/CLASSIC
- **Display:**
- LED Display
- Orange Color
- Reception:
- FM PLL Radio 87.5 MHz - 108MHz
- Station Presets: 40 (FM)
- **Inputs:**
- Bluetooth - Wireless Audio Streaming
- USB Playback
- SD Card Slot
- Line In (3.5mm Stereo Jack)
- Rear Aux Input (Audio Cinch L/R)
- **Others:**
- USB Charging
- **Power Supply:** AC 100-240V, 50/60Hz
- Consumption: Max. 30W
- Energy Efficiency: <0,5W
- Dimension: 216 x 950 x 216 mm
- Weight: 7.5 kg
- **Accessories:**
- IR Remote Controler, Battery, Manual

60 W ***LED display*** ***BT***

SSS 601
AUDIO SYSTEM

- **Power:** 2 x 10W + 2 x 20W
- Aluminium Body
- Premium Fabric Speaker Cover for Minimize Sound Distortion
- LED Slide-Touch Volume Control
- Built-in rechargeable battery
- **Sound:**
- Frequency Response: 40 Hz - 19 KHz
- Total Harmonic Distortion: <(><<)> 2%
- 4 Speakers (Stereo) + 2 Passive Radiators
- **Inputs:**
- Bluetooth Audio 4.0
- Bluetooth Range: <(><<)> 10 M
- Audio Aux Input (3.5 mm stereo jack)
- **Others:**
- Built-in battery: 2200 mAh Li-Ion
- Maximum Playing Time: 5-6 Hours
- **Power Supply:** 100-240 V AC 50/60 Hz
- Dimension: 282 x 293 x 167 mm
- Weight: 2.4 kg

60 W ***BT 4.0***

SSS 3200
AUDIO SYSTEM

- **Power:** 60W
- Brushed Aluminium Top Panel and Premium Fabric Speaker Cover
- NFC Easy Connection
- Digital Sound Processor DSP
- **Sound:**
- Frequency Response: 50Hz - 20KHz
- Total Harmonic Distortion: 1%
- 3 Speaker (2 Mid-Range + 1 Subwoofer)
- **Inputs:**
- Bluetooth Audio 2.1
- Connection Distance up to 15m
- Audio Aux Input (3.5mm stereo Jack)
- USB Input for Playback
- **Others:**
- LED Status Indicator
- USB Charging for Mobile Devices (1A)
- **Power Supply:** AC 100-240V~50/60 Hz
- Standby Consumption: 0.5W

BT 3.0 ***LED display*** **30 W**

SSS 801
AUDIO SYSTEM

- **Power:** 80W
- Wooden and Aluminium Body
- **Sound:**
- 2 Treble Speakers + 1 Bass
- Frequency Response: 40Hz - 20KHz
- Total Harmonic Distortion: L/R ≤5%
- Equalizer Modes (Rock, Flat, Classic, Jazz, Pop)
- **Display:**
- White color
- 3-Level Dimmer
- **Reception:**
- FM PLL Radio 87.5 MHz - 108MHz
- Radio Data System (RDS)
- Station Presets: 40 (FM)
- **Inputs:**
- CD Playback CD/MP3/CD-R/CD-RW
- Audio Aux (3.5mm Stereo Jack)

BT 2.1 **80 W**

SSS 301
AUDIO SYSTEM

- **Power:** 30W
- Wooden and Aluminium Body
- **Sound:**
- 2 Treble Speakers
- Frequency Response: 50Hz - 18KHz
- Total Harmonic Distortion: L/R ≤1% (1KHz)
- Equalizer Modes (Rock, Flat, Classic, Jazz, Pop)
- **Display:**
- White color
- 3-Level Dimmer
- **Reception:**
- FM PLL Radio 87.5 MHz - 108MHz
- Radio Data System (RDS)
- Station Presets: 40 (FM)
- **Inputs:**
- CD Playback CD/MP3/CD-R/CD-RW
- Bluetooth Wireless Audio Streaming 2.1
- Audio Line-In (3.5mm Stereo Jack)
- USB Playback (Charging 5V/500mA)

BT 2.1 **30 W**

SMC 4300
MICROSYSTEM

- **Power:** 30W
- Premium Aluminium Design
- **Sound:**
- 2 Speakers
- Frequency Response: 84 Hz - 16 kHz
- Total Harmonic Distortion: L/R ≤5% (1KHz)
- Equalizer Modes: FLAT/ROCK/POP/JAZZ/CLASSIC
- **Display:**
- LED Display
- Orange Color
- **Reception:**
- FM PLL Radio 87.5 MHz - 108MHz
- Radio Data System (RDS)
- Station Presets: 40 (FM)
- **Inputs:**
- CD Playback CD/MP3/CD-R/CD-RW
- Bluetooth - Wireless Audio Streaming
- USB Playback
- Line In (3.5mm Stereo Jack)
- **Others:**
- Sleep Function
- USB Charging
- **Power Supply:** AC 100-240V, 50/60Hz
- Consumption: Max. 20W
- Energy Efficiency: <0.5W
- Dimension (Main Unit): 180 x 135 x 245 mm
- Dimension (Speaker): 155 x 254 x 129 mm
- Weight: 4.2 kg (set)
- **Accessories:**
- IR Remote Controler, Battery, Manual

30 W **LED display** **BT** CERTIFIED USB

SMC 4120
MICROSYSTEM

- **Power:** 12W
- Premium Aluminium Design
- **Sound:**
- 2 Speakers
- Frequency Response: 84 Hz - 18 kHz
- Total Harmonic Distortion: L/R ≤5% (1KHz)
- Equalizer Modes: FLAT/ROCK/POP/JAZZ/CLASSIC
- **Display:**
- LED Display
- Orange Color
- **Reception:**
- FM PLL Radio 87.5 MHz - 108MHz
- Station Presets: 40 (FM)
- **Inputs:**
- CD Playback CD/MP3/CD-R/CD-RW
- Bluetooth - Wireless Audio Streaming
- USB Playback
- Line In (3.5mm Stereo Jack)
- **Others:**
- Sleep Function
- USB Charging
- **Power Supply:** AC 100-240V, 50/60Hz
- Consumption: Max. 20W
- Energy Efficiency: <0,5W
- Dimension (Main Unit): 180 x 120 x 245 mm
- Dimension (Speaker): 150 x 240 x 126 mm
- Weight: 4 kg (Set)
- **Accessories:**
- IR Remote Controler, Battery, Manual

12 W **LED display** **BT** CERTIFIED USB

SMC 2100
MICROSYSTEM

- **Power:** 10W
- Premium Radiator Speakers
- **Sound:**
- 2 Speakers
- Frequency Response: 118 Hz - 16 kHz
- Total Harmonic Distortion: L/R ≤5% (1 kHz)
- Equalizer Modes: Flat, Classic, Pop, Rock, Jazz
- **Display:**
- LED Display
- Orange Color
- Reception:
- FM PLL Radio 87.5 MHz - 108MHz
- Station Presets: 40 (FM)
- **Inputs:**
- CD Playback CD/MP3/CD-R/CD-RW
- Bluetooth - Wireless Audio Streaming
- USB Playback
- Line In (3.5mm Stereo Jack)
- **Others:**
- Sleep Function
- **Power Supply:** AC 100-240V, 50/60Hz
- Consumption: Max. 20W
- Energy Efficiency: <0,5W
- Dimension (Main Unit): 140 x 140 x 190 mm
- Dimension (Speaker): 130 x 140 x 120 mm
- Weight: 1.9 kg (set)
- **Accessories:**
- IR Remote Controler, Battery, Manual

CERTIFIED USB BT LED display 10 W

SMC 605
MICROSYSTEM

- **Power:** 10W
- CD/CD-R/CD-RW/MP3 Compatible
- USB Connector
- LCD Display with Blue Backlight
- Digital FM Radio
- Remote Control
- Headphone Output 3,5 mm
- Plastic Speaker
- **Power:** AC 230 V/ 50 Hz
- Host Dimension(W*H*D): 140 x 140 x 190 mm
- Speaker Dimension (W*H*D): 129 x 140 x 125 mm
- Weight: 1,65 kg

CERTIFIED USB 10 W

STT 500
TURNTABLE

- Dynamic Cartridge (MM) with Pre-amplifier
- Auto-Stop and Auto-Arm-Return
- Turntable Pitch Control
- Aluminium Turntable Platter
- Motor:
- Dual Speed 33/45 RPM
- Belt Drive System
- DC Servo Motor
- Connectivity
- Line Output (Cinch L/R)
- USB Type-B Output (for Recording to PC)
- **Others:**
- Power Consumption: 230V~ 50Hz, max. 3W
- Dimension: 450 x 355 x 121mm
- Weight: 6.5kg
- **Accessories:**
- USB Cable, Rubber Pad, MM Cartridge, 45 RPM Adaptor, Audacity CD Software, External Power Adaptor, Instruction Manual

STT 312
TURNTABLE

- Dynamic Cartridge (MM) with Pre-Amplifier
- Belt Drive System
- DC servo motor
- Auto-Stop and Auto-Arm-Return
- Dual Speed 33/45 RPM
- Line Output (RCA L / R)
- Package Incl. Recording USB Cable to PC from All Analogue Devices (from Stereo Audio Cinch Connectors L / R)
- Power Consumption: 230V / ~ 50Hz, 3W max
- **Accessory:**
- USB Recording Cable, Stereo RCA Cable, Rubber Pad, 45RPM Adapter, Instruction Manual

STT 211
TURNTABLE

- Turnatable with Autostop Function
- Triple Speed 33/45/78 RPM
- PLL Digital FM/AM Tuner (30 Presets for FM, 20 Presets for AM)
- Automatic Searching
- USB/SD Slot
- Direct Encoding to USB/SD from LP Disc, Radio and External Sources
- MP3 Compatible
- Line Output (Cinch L/R)
- Integrated Stereo Speakers (2x 5W RMS)
- Power Consumption: 12W / #1W Standby Mode
- Dimension: 305x288x118mm
- Weight: 1.9kg
- **Accessories:**
- Remote Control, Instruction Manual

STT 210
TURNTABLE

- Turnatable with Autostop Function
- Triple Speed 33/45/78 RPM
- PLL Digital FM/AM Tuner (30 Presets for FM, 20 Presets for AM)
- Automatic Searching
- USB/SD Slot
- Direct Encoding to USB/SD from LP Disc, Radio and External Sources
- MP3 Compatible
- Line Output (Cinch L/R)
- Integrated Stereo Speakers (2x 5W RMS)
- Power Consumption: 8W / #1W Standby Mode
- Dimension: 430x375x160mm
- Weight: 4.4 kg
- **Accessories:**
- Remote Control, Instruction Manual

STT 016
TURNTABLE

- RETRO Stereo Turntable
- Autostop Function
- USB Slot
- CD/MP3 player and Cassette Deck
- Triple Speed 33/45/78 RPM
- CD/MP3 Player
- Cassette Deck
- FM/AM Tuner
- USB slot
- Direct Encoding to USB from LP Disc, CD, FM/AM Tuner and Cassette Deck
- MP3/WMA Compatible
- Line Input (Chinch L/R)
- Integrated Stereo Speakers (2x 3W RMS)
- **Power Consumption :** 19W
- Dimension: 500 x 340 x 210 mm
- Weight: 7.8kg
- **Accessories:**
- Remote Control, Instruction Manual

STT 018
TURNTABLE

- RETRO Stereo Turntable
- Speed 33/45/78 RPM
- CD/MP3 Player
- FM/AM Tuner
- Manual Searching
- USB Slot
- MP3 Compatible
- Integrated Stereo Speakers (2x 8W RMS)
- Accessories: Instruction Manual
- Power Consumption: 18W
- Dimension: 433x376x457mm

STT 019
TURNTABLE

- RETRO Stereo Turntable
- Triple Speed 33/45/78 RPM
- CD/MP3 Player
- FM/AM Radio Tuner
- Manual Searching
- USB Playback and Encoding
- Direct Encoding to USB from LP Disc and CD
- MP3/WMA Compatible
- Integrated Stereo Speakers (2x 2W RMS)
- Power: AC 230V 50Hz
- Power Consumption: 19W

SIR 5000WDB

INTERNET RADIO

- Easy Operation with Unique Control Button
- More than 26 000 Internet Radio Stations
- AirMusic Control App (iOS/Android)
- Internet Radio:
- Easy Connection via Wifi
- Local Station Search by Auto/Country/City
- Favorite Station List
- Station Presets: 250 (Internet)
- Manage Radio Station via MediaU Website
- **Sound:**
- Power Output: 6W (Impedance: 4Ω)
- Frequency Response: 84 Hz - 16kHz
- Total Harmonic Distortion: L/R ≤5% (1KHz)
- 8 Equalizer Modes
- **Display:**
- 2.4" Full Color LCD Display
- Dimmer
- Reception:
- DAB+ Tuner (Digital Audio Broadcasting)
- FM PLL Radio Tuner
- Radio Data System (RDS)
- Station Presets: 20 (FM)
- **Inputs:**
- Bluetooth - Wireless Audio Streaming
- Line In (3.5mm Stereo Jack)
- **Others:**
- Weather Forecast for 5000 cities
- Support UPnP/DLNA
- Time, Alarm, Sleeper
- Headphones Output (3.5mm Stereo Jack)
- **Power Supply:** Adaptor 9V, 1.5A
- Consumption: Max. 16W
- Energy Efficiency: <(><<)>3W
- Dimension (Main Unit): 220 x 110 x 110mm
- Weight: 1.1kg
- **Accessories:**
- IR Remote Controler, Battery, Adaptor, 3.5mm Aux Jack, Manual

AUX mp3 CERTIFIED USB CD BT 2.1 25W RMS

SPT 5800

CD PLAYER

- Boombox with CD, BT, MP3, USB, AUX and FM Radio
- Output Power: 25 W RMS (2 x 12.5 W)
- Two Active 4 Ohm Speakers 4"
- Two Passive Speakers to Increase the Bass Sound Effect
- Disco LED Light Mode (7 Colors) with Flashing Modes Selection
- Equalizer Function (Rock, Pop, Jazz, Flat, Classic)
- Rubberized Surface
- Remote Control
- CD-R / RW, Bluetooth, MP3 and USB Compatible
- Programmable Playback with 20 Track Memory for CD and 99 Track Memory for MP3
- Bluetooth V2.1 + EDR
- USB Interface
- AUX-IN Jack 3.5 mm
- AUX-OUT Jack 3.5 mm (Headphones)
- Stereo FM Receiver 87.5 - 108 MHz
- Digital Tuning and Frequency Display
- Preset Memory - 30 Channels in FM Band
- Telescopic FM Antenna
- FM Stereo Indicator on Display
- Stand-by Indicator: 3 mm Red LED
- LCD Display with Backlight
- Power: AC 230 V / 50 Hz or 8 x 1.5 V Battery Type D / LR20 (Not Included)
- Consumption: 48 W
- Dimensions: (w / h / d) 500 x 196 x 211 mm
- Weight: 3.4 kg

SPT 5280
CD PLAYER

New

- Boombox with CD, BT, MP3, USB, AUX and FM Radio
- Output Power: 16 W RMS (2 x 8 W)
- 4 Speakers (2 x Wideband Speaker + 2 x Treble)
- Equalizer Function (Rock, Pop, Jazz, Flat, Classic)
- CD-R / RW, Bluetooth, MP3 and USB Compatible
- Programmable Playback with 20 Track Memory for CD and 99 Track Memory for MP3
- Bluetooth V3.0
- USB Interface
- AUX-IN Jack 3.5 mm
- AUX-OUT Jack 3.5 mm (Headphones)
- Stereo FM Receiver 87.5 - 108 MHz
- Digital Tuning and Frequency Display
- Preset Memory - 20 Channels in FM Band
- Clock
- Sleep Timer
- Waking Up with Music (Radio / CD / USB)
- Remote Control
- Telescopic FM Antenna
- FM Stereo Indicator
- LCD Display with Backlight, ID3 Tag
- Power: AC 230 V / 50 Hz or 8 x 1.5 V Battery Type D / LR20 (Not Included)
- Consumption: 40 W
- Dimensions: (w / h / d) 513 x 162 x 287 mm
- Weight: 3.5 kg

BT 3.0 **CD** CERTIFIED USB **mp3** **AUX** **16W RMS**

SPT 280
CD PLAYER

- Portable CD Player with MP3, USB and FM Radio
- Programmable Playback with 20 Track Memory for CD and 99 Track Memory for MP3
- Search, Skip, Repeat CD, USB Playback
- Select of Folders
- Display Information of MP3 Files
- Preset Memory - 20 Channels in FM Band
- Clock
- Timer and Sleep Function
- Waking Up The Music
- Power: AC 230 V / 50Hz , 8 x 1,5V Battery Type D or UM 1 (Not Included)
- Stereo Speakers: 2 x Wideband Speaker and 2 x Tweeter
- Output Power: 2 x 8 W RMS
- Remote Control
- Stereo Headphone Jack 3.5 mm
- Auxiliary Input Jack 3.5 mm
- Consumption: 40 W
- Dimensions: 513x287x162 mm
- Weight: 3,5 kg

CD CERTIFIED USB **mp3** **AUX** **16W RMS**

SPT 4200
CD PLAYER

- Portable CD Player with BT, MP3, USB, SD, AUX and FM Radio
- Output Power: 4 W RMS (2 x 2 W)
- 6 Speakers
- 2 x 2.5" 4 Ohm 3 W Speaker and 4 x Piezo Ceramic Buzzer
- Remote Control
- CD-R / RW, Bluetooth, MP3 and USB Compatible
- Programmable Playback with 20 Track Memory for CD and 99 Track Memory for MP3
- Bluetooth V2.1
- USB Interface
- SD / MMC Card Reader
- AUX-IN Jack 3.5 mm
- AUX-OUT Jack 3.5 mm (Headphones)
- Stereo FM Receiver 87.5 - 108 MHz
- Digital Tuning and Frequency Display
- Preset Memory - 30 Channels in FM Band
- Telescopic FM Antenna
- FM Stereo Indicator on Display
- Clock
- LCD Display with Backlight
- Power: AC 230 V / 50 Hz or 6 x 1.5 V Battery Type C / LR14 (Not Included)
- Consumption: 15 W
- Dimensions: (w / h / d) 330 x 116 x 224 mm
- Weight: 1.35 kg

mp3 CERTIFIED USB **CD** **BT 2.1** **AUX** **4W RMS** **SD**

SPT 3800
CD PLAYER

- Portable CD Player with BT, MP3, USB, AUX and FM Radio
- Output Power: 4 W RMS (2 x 2 W)
- Remote Control
- CD-R / RW, Bluetooth, MP3 and USB Compatible
- Programmable Playback with 20 Track Memory for CD and 99 Track Memory for MP3
- Bluetooth V2.1
- USB Interface
- AUX-IN Jack 3.5 mm
- Stereo FM Receiver 87.0 - 108 MHz
- Digital Tuning and Frequency Display
- Preset Memory - 20 Channels in FM Band
- Telescopic FM Antenna
- FM Stereo Indicator
- Clock
- Negative Display with White Digits
- Power: AC 230 V / 50 Hz or 8 x 1.5 V Battery Type C / LR14 (Not Included)
- Consumption: 15 W
- Dimensions: (w / h / d) 301 x 140 x 218 mm
- Weight: 1.92 kg

mp3 CERTIFIED USB **CD** **BT 2.1** **AUX** **4W RMS**

SPT 3310

CD PLAYER

- Portable CD Player with BT, MP3, USB, AUX and FM Radio
- Output Power: 4 W RMS (2 x 2 W)
- CD-R / RW, Bluetooth, MP3 and USB Compatible
- Programmable Playback with 20 Track Memory for CD and 99 Track Memory for MP3
- Bluetooth V2.1
- USB Interface
- AUX-IN Jack 3.5 mm
- Stereo FM Receiver 87.0 - 108 MHz
- Digital Tuning and Frequency Display
- Preset Memory - 20 Channels in FM Band
- Telescopic FM Antenna
- FM Stereo Indicator
- Clock
- LCD Display with Backlight
- Power: AC 230 V / 50 Hz or 8 x 1.5 V Battery Type C / LR14 (Not Included)
- Consumption: 15 W
- Dimensions: (w / h / d) 301 x 140 x 218 mm
- Weight: 1.97 kg

New

BT 2.1 **CD** **USB** **mp3** **AUX** **4W RMS**

SPT 228 BO
SPT 228 BG

CD PLAYER

- Portable Radio Receiver with CD/MP3/USB/ Player
- CD/CDR / CDRW / MP3 /USB/SD Compatible
- Programmable CD Playback with 20 Track Memory and 100 Track for USB/SD
- Search,Play/Pause, Skip,Repeat One/All Function
- USB Connector for Connecting Memory Stick (Max. 32 GB)
- AM / FM Stereo Analogue Receiver
- Telescopic FM Antenna
- FM Stereo Indicator
- Blue Backlight LCD Display
- Stereo Speakers 2 x 1,5W (RMS)
- Auxiliary Line Input
- AC 230 V / 50Hz , 8 x 1,5V Battery Size C
- Dimensions: 140 x 280 x 249 mm
- Weight: 1,70 kg

CD **USB** **mp3** **AUX** **SD** **3W RMS**

New

SPT 2320
CD PLAYER

- Portable CD Player with BT, MP3, USB, AUX and FM Radio
- Output Power: 3 W RMS (2 x 1.5 W)
- CD-R / RW, Bluetooth, MP3 and USB Compatible
- Programmable Playback with 20 Track Memory for CD and 99 Track Memory for MP3
- Bluetooth V2.1
- USB Interface
- AUX-IN Jack 3.5 mm
- AUX-OUT Jack 3.5 mm (Headphones)
- Stereo FM Receiver 87.5 - 108 MHz
- Digital Tuning and Frequency Display
- Preset Memory - 20 Channels in FM Band
- Telescopic FM Antenna
- Clock
- Negative Display with White Digits
- Power: AC 230 V / 50 Hz or 6 x 1.5 V Battery Type C / LR14 (Not Included)
- Consumption: 9 W
- Dimensions: (w / h / d) 256 x 128 x 225 mm
- Weight: 1.16 kg

mp3 CERTIFIED USB **CD** **BT 2.1** **AUX** **3W RMS**

SPT 207
CD PLAYER

- Portable Radio Receiver with CD and Cassette Player
- CD/CDR-W Compatible
- Repeat 1 / All Tracks
- Analogue Tuning Radio
- Stereo AM / FM Receiver
- Telescopic FM Antenna
- FM Stereo Indicator
- 2 Digit Red LED Display
- Single Cassette Recording (Record,Play, Pause, Fast Forward, Rewind, Stop, Record)
- Stereo Speakers 2 x 1 W(RMS)
- Power: AC 230 V / 50Hz or Battery 6 x 1,5 V Type C or UM-2 (Not Included)
- Consumption: 10 W
- Dimensions: 290 x 238 x 141 mm
- Weight: 1,8 kg

mp3 CERTIFIED USB **CD** **2W RMS**

SPT 1600 BGN
SPT 1600 BOR
SPT 1600 BS

CD PLAYER

- Portable CD Player with MP3, USB and FM Radio
- CD-R/RW, MP3 Compatible
- Programmable Playback with 20 Track Memory for CD and 99 Track Memory for MP3
- USB Interface
- Search, Skip, Repeat CD, USB Playback
- Select of Folders
- Stereo FM Receiver 87.5 - 108 MHz
- Digital Tuning and Frequency Display
- Preset Memory - 20 Channels in FM Band
- Telescopic FM Antenna
- FM Stereo Indicator on Display
- Output Power: 2 x 1 W RMS
- Auxiliary Input Jack 3.5 mm
- Power: AC 230 V / 50 Hz or 6 x 1.5 V Battery Type C / LR14 / UM 2 (Not Included)
- Consumption: 12 W
- Dimensions: (w / h / d) 230 x 115 x 220 mm
- Weight: 1.2 kg

CD CERTIFIED USB mp3 AUX 2W RMS

SPT 1200

CD PLAYER

- Portable CD Player with FM / AM Radio
- CD-R / RW Compatible
- Skip, Repeat CD, Program Play Mode
- FM Receiver 87.5 - 108 MHz
- AM Receiver 522 - 1620 kHz
- Analog Tuning
- Telescopic Antenna
- FM Stereo Indicator on Display
- Output Power: 2 x 1 W RMS
- Auxiliary Input Jack 3.5 mm
- Power: AC 230 V / 50 Hz or 6 x 1.5 V Battery Type C / LR14 / UM 2 (Not Included)
- Consumption: 12 W
- Dimensions: (w / h / d) 197 x 105 x 230 mm
- Weight: 1.16 kg

CD mp3 AUX 2W RMS

Li-Ion 4W RMS AUX DAB+

SRD 6600

PORTABLE RADIO

- Digital Radio DAB+ / FM-PLL with Rechargeable Battery
- DAB Tuner, FM Band III
- PLL Tuning, RDS (Radio Data System)
- Preset 20 Station (10 x DAB / 10 x FM)
- Stereo Speakers
- Metal Holder
- Stereo FM Receiver 87.5 - 108 MHz
- DAB+ Receiver 174.928 - 239.200 MHz
- Dot Matrix LCD Display, White Color Backlight
- Sleep Timer
- Telescopic Antenna
- 12/24 Hours Clock Setting
- Output Power 2 x 2 W RMS
- Auxiliary Input Jack 3.5 mm
- Silver and Black Color
- 4-5 Hours Playback Time at 50% Volume Level
- Li-ion Rechargeable Battery 1000 mAh (3.7V)
- Micro USB 5V Charging Port
- 5V / 1A AC Adaptor with Micro USB
- Consumption: 9 W

SRD 6400
PORTABLE RADIO

- Digital Radio DAB+ / FM-PLL with Rechargeable Battery
- DAB Tuner, FM Band III
- PLL Tuning, RDS (Radio Data System)
- Preset 20 Station (10 x DAB / 10 x FM)
- Stereo FM Receiver 87.5 - 108 MHz
- DAB+ Receiver 174.928 - 239.200 MHz
- Dot Matrix LCD Display, White Color Backlight
- Sleep Timer
- Telescopic Antenna
- 12 / 24 Hours Clock Setting
- Output Power 1.5 W RMS
- Headphone Jack 3.5 mm
- Silver and Black Color
- 6-8 Hours Playback Time at 50% Volume Level
- Li-ion Rechargeable Battery 1000 mAh (3.7V, BL-5C)
- Micro USB 5V Charging Port
- 5V / 1A AC Adaptor with Micro USB
- Consumption: 7 W
- Dimensions: (w / h / d) 170 x 100 x 35 mm
- Weight: 0.3 kg

DAB+ Li-Ion 1,5W RMS

SRD 230 BRD
SRD 230 BGN
SRD 230 BBU
PORTABLE RADIO

- Portable Radio with FM PLL Tuning and USB/SD/MP3 Player
- FM 87,5 - 108 MHz
- 50 Presets
- Telescopic FM Antenna
- USB Port and SD Card Slot Support max 16GB Memory
- LCD Display with Backlight
- Clock Function with Two Alarms, Sleep and Snooze
- AUX-IN Connector Jack 3,5 mm
- Headphone Connector Jack 3,5 mm
- Power Output: 2 x 1W (RMS)
- AC Operated Version: AC 100 V -230 V/50 -60 Hz
- DC Operated: 4 x 1,5 V Type C(Batteries not Included)
- Consumption: 4 W
- Unit Dimension: 187 x 174 x 94 mm
- Weight: 0,6 kg

CERTIFIED USB AUX SD 2W RMS

SRD 215 W
SRD 215 B
PORTABLE RADIO

- Pocket Receiver
- FM Band Receiver with Digital Readout
- FM Range: 88MHz to 108MHz
- FM Telescopic Antenna
- USB Connector
- Micro SD Slot (Max 8 GB)
- Support MP3 Format Music Files
- External Earphone Jack
- Audio Input Jack 3,5 mm
- Charge Input MINI USB
- Power: 2W(RMS)
- Play Time: about 10 Hours
- AC 230 V / 50 Hz Power
- Power: Lithium Baterry
- Two Colors Version: Black and White
- Dimensions: 72 x 110 x 29 mm

CERTIFIED USB micro SD Li-Ion 2W RMS

SRD 210 BGN
SRD 210 BS
SRD 210 B
PORTABLE RADIO

- Portable Radio
- High Sensitivity and Excellent Sound Performance
- Power Output: 1W RMS
- Speaker Size: 3" Speaker
- Analogue AM/FM receiver
- Frequency : AM 530 - 1600 kHz
- FM 87,5 - 108 MHz
- Telescopic FM Antenna
- 3.5mm Headphone Jack
- With Carrying Handle
- AC Operated Version: 230V 50Hz
- DC Operated: 4.5V (3 x UM-2/C Cell)Batteries not Included
- Consumption: 3,5W
- Unit Dimension: 210(L) x 53(D) x 139(H) mm
- Weight: 635g

1W RMS

SRD 1100 W
SRD 1100 B
PORTABLE RADIO

- Pocket Receiver
- Portable FM / AM Radio Reciever
- FM Receiver 87.5 - 108 MHz
- AM Receiver 530 - 1600 kHz
- Analog Tuning
- Telescopic Antenna
- Output Power: 0.3 W RMS
- Headphone Jack 3.5 mm
- Compact size and low weight
- Belt Clip
- **Power:** 2 x 1,5 V type AAA (Batteries Not Included)
- Dimensions: (w / h / d) 61 x 122 x 27 mm
- Weight: 82 g

0,3W RMS

SRD 020
PORTABLE RADIO

- Retro Design
- Backlight Control
- Power Output: 3W
- Speaker Size: 6.5 cm
- Analogue AM/FM Receiver
- AM Frequency: 530 - 1600 kHz
- FM Frequency: 87,5 - 108 MHz
- FM Antenna
- AC Operated Version: 230V ~ 50Hz
- Power Consumption: Max 9 W
- Unit Dimension: 310x195x147 mm
- Weight: 2.15 kg

3W RMS

SRC 340
RADIO CLOCK

- Clock Projection
- Digital Display of Clock and Frequency
- Year/Month/Date
- White LED Display 1,8 "(4,6 cm)
- Red Projection of Clock
- Image 180° Rotation with Focus Adjustment
- PLL FM Radio with 10 Presets
- Dual Alarm with Weekend Cancellation
- Wake up With Buzzer or Radio
- Snooze
- Sleep
- Dimmer Display with 3 levels
- Battery Back-Up CR 2032 (Battery not Included)
- AC Power 230V 50 Hz
- Consumption: 5W
- Dimensions:180 x 100 x 75 mm
- Weight: 455 g

FM **Projection Clock** **LED display**

SRC 330 OR
SRC 330 GN
RADIO CLOCK

- Clock Projection
- Digital Display of Clock and Frequency
- Year/Month/Date
- LED Display 1,2 "(3 cm)
- Red Projection of Clock
- Image 180° Rotation with Focus Adjustment
- PLL FM Radio with 10 Presets
- Indoor Temperature
- Dual Alarm with Weekend Cancellation
- Wake up With Buzzer or Radio
- Snooze
- Sleep
- High/Low Dimmer Display
- Battery Back-Up (Battery not Included)
- AC Power 230V 50 Hz
- Dimensions:188 x 82 x 72 mm

FM **Projection Clock** **LED display**

SRC 3100 W
SRC 3100 B
RADIO CLOCK

- Clock Projection
- PLL FM Radio with 10 Presets
- FM Receiver 87.5 - 108 MHz
- Amber LED display 0.9"
- Dimmer Function
- Red Projection of Clock
- 180° Rotating Lens with Adjustable Focus
- Dual Alarm
- Wake Up with Buzzer or Radio
- Sleep Function
- Snooze Function
- Battery Back-Up CR-2032 1 x 3 V (Battery Not Included)
- **Power:** AC 230 V / 50 Hz
- Consumption: 5 W
- Dimensions: (w / h / d) 160 x 60 x 57 mm
- Weight: 370 g

FM **Projection Clock** **LED display**

LED display FM

SRC 170 GN
SRC 170 OR
RADIO CLOCK

- Digital Display of Clock and Frequency
- Year/Month/Date
- LED Display 1,2 "(3 cm)
- PLL FM Radio
- Indoor Temperature
- Dual Alarm with Weekend Cancellation
- Wake up With Buzzer or Radio
- Snooze
- Sleep
- High/Low Dimmer Display
- Battery Back-Up (Battery not Included)
- AC Power 230V 50 Hz
- Dimensions:155 x 82 x 72 mm

LED display FM

SRC 136 WH
SRC 136 RD
SRC 136 GN
SRC 136 B
SRC 136 BU
RADIO CLOCK

- Digital Display of Clock
- 0,6" LED Display(1,5 cm)
- PLL FM Radio
- 20 Preset Memory Station
- Dual Alarm Setting
- Hi/Lo Dimmer
- Wake to Radio or Buzzer
- Snooze, Sleep Function
- Battery Back Up: 2 x 1,5 V Type AA(Not Included)
- **Power:** AC 230 V, 50 Hz
- Consumption: 3,5 W
- Dimension: 120 x 50 x 120 mm

LED display FM

SRC 1100 W
SRC 1100 B
RADIO CLOCK

- Digital Display of Clock
- PLL FM Radio with 10 Presets
- FM Receiver 87.5 - 108 MHz
- Amber LED display 0.6"
- Dimmer Function
- Dual Alarm
- Wake Up with Buzzer or Radio
- Sleep Function
- Snooze Function
- Battery Back-Up CR-2032 1 x 3 V (Battery Not Included)
- **Power:** AC 230 V / 50 Hz
- Consumption: 5 W
- Dimensions: (w / h / d) 140 x 57 x 52 mm
- Weight: 290 g

SFP 6270
MP3 PLAYER

- MP3/MP4 Player 8GB
- MP3, WMA Playback
- Plays Music, Video, Photos, Text
- 1,8" TFT LCD Full-Color Display
- Integrated FM Radio
- ID3 Tag and Lyrics Support
- Convert and Play Video File
- Multilingual Menu (ENG, CZ, SK, H, PL)
- USB 2.0 Hi Speed Interface
- Micro SD Card Slot (Max 32GB)
- Programable Playback (Repeat One, All, Random, Folder, Playlist)
- Equalizer
- Build-in Loudspeaker
- Integrated Rechargeable Battery
- Accesories: Ear Phones, USB Cable
- Dimension: 84,5 x 42,5 x10 mm
- Weight: 25 g

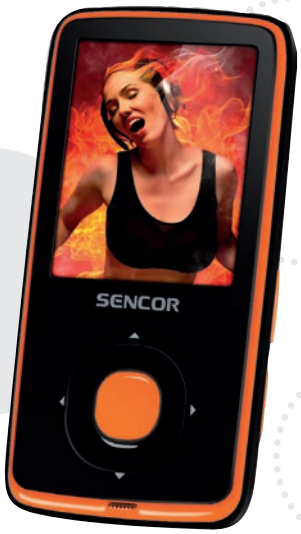

LCD 8GB FM

SFP 6070
MP3 PLAYER

- MP3/MP4 Player 8GB
- MP3, WMA Playback
- Plays Music, Video, Photos, Text
- 1,8" TFT LCD Full-Color Display
- Integrated FM Radio
- ID3 Tag and Lyrics Support
- Convert and Play Video File
- Multilingual Menu (ENG, CZ, SK, H, PL)
- USB 2.0 Hi Speed Interface
- Micro SD Card Slot (Max 32GB)
- Programable Playback (Repeat One, All, Random, Folder, Playlist)
- Equalizer
- Build-in Loudspeaker
- Integrated Rechargeable Battery
- Accesories: Ear Phones, USB Cable
- Dimension: 84,5 x 42,5 x10 mm
- Weight: 25 g

micro SD LCD 8GB FM

SFP 5870 BYL
SFP 5870 BS
SFP 5870 BBU
MP3 PLAYER

- MP3/MP4 Player 8GB
- MP3, WMA Playback
- Plays Music, Video, Photos, Text
- 1,8" TFT LCD Full-Color Display
- Integrated FM Radio
- ID3 Tag and Lyrics Support
- Convert and Play Video File
- Multilingual Menu (ENG, CZ, SK, H, PL)
- USB 2.0 Hi Speed Interface
- Micro SD Card Slot (Max 32GB)
- Programable Playback (Repeat One, All, Random, Folder, Playlist)
- Equalizer
- Build-in Loudspeaker
- Integrated Rechargeable Battery
- Accesories: Ear Phones, USB Cable
- Dimension: 84,5 x 42,5 x10 mm
- Weight: 25 g

micro SD LCD 8GB FM

SFP 1460 LG

MP3 PLAYER

- Music Format - MP3 and WMA
- Memory 4 GB
- Slot for Micro SD Card
- Clip for Fasten
- Button for Next and Previous, Volume
- LED Diod for Indication of Actually Function or Battery
- Volume Protection
- USB 2.0 Hi-speed
- Playing Time: 5 - 6,5 Hours
- Built-in Rechargeable Li-Pol Battery 3,7 V, 110mAh
- Accesories: Earphones, USB Cable
- Unit Size: 47,5 x 32 x 17 mm
- Weight: 15 g

4GB **micro SD**

SFP 1360 GN
SFP 1360 RD

MP3 PLAYER

- Music Format - MP3 and WMA
- Memory 4 GB
- Button for Next and Previous, Volume
- Mp3 Playing Time: more than 6 Hours
- USB 2.0 Hi-speed
- Built-in Rechargeable Battery
- Accesories: Earphone, USB Cable
- Unit Size: 45,5 × 35 × 18 mm (Incl. Clip)
- Weight: 15g

4GB

SFP 1000

MP3 PLAYER

- MP3 player
- Changing the covers
- Only the slot for micro SD card (with no internal memory)
- Button to play forward and rewind, volume control
- USB 2.0 interface
- rechargeable battery
- Accessories: earphone, USB cable, 3x exchange cover
- Dimensions: 45 x 10 mm
- Weight: 15g

micro SD

- **SEP 300 BLACK**
- **SEP 300 BLUE**
- **SEP 300 GOLD**
- **SEP 300 GREY**
- **SEP 300 KHAKI**
- **SEP 300 PINK**
- **SEP 300 RED**
- **SEP 300 WHITE**

EARPHONES

- Speaker Diameter: Ø 10 mm
- Sensitivity:96±3dB(at 1kHz 0.5Vrms)
- Impedance: 32 Ω +/- 10 %
- Frequency Response:20~20kHz
- Cord Length:≤120cm
- Microphone

- **SEP 189 WHITE**
- **SEP 189 BLACK**

EARPHONES WITH MICROPHONE

- Speaker Diameter: Ø 10 mm
- Impedance: 32 +/- 10% #
- Frequency Response: 20 Hz - 20 kHz
- Sensitivity: 98 db +/- 3 dB / 1 mW (the level of acoustic. Pressure at 1 kHz)
- Cable length: 1.25 m ± 5%
- Jack: 3.5 mm
- Microphone Sensitivity: -42 db ± 3 db
- Microphone Frequency range: 20 Hz - 20 kHz
- Microphone impedance: 2.2 K # +/- 5%

SPORT

- **SEP 170 VC YELLOW**
- **SEP 170 VC WHITE**
- **SEP 170 VC RED**
- **SEP 170 VC PURPLE**
- **SEP 170 VC GREEN**
- **SEP 170 VC BLUE**
- **SEP 170 VC BLACK**

EARPHONES

- Speaker Diameter: Ø 10 mm
- Sensitivity:116±3dB(at 1kHz 0.5Vrms)
- Impedance: 16 Ω +/- 10 %
- Frequency Response:18~20kHz
- Cord Length:≤120cm
- Connector: 3.5 mm

SEP 120 BLACK
SEP 120 PINK
SEP 120 GREEN
SEP 120 TURQOUISE
SEP 120 RED
SEP 120 YELLOW
SEP 120 WHITE

EARPHONES

- Speaker Diameter: Ø 10 mm
- Impedance: 16 Ω + / - 10%
- Frequency response: 20 Hz - 20 kHz
- Sensitivity: 95 db + / - 3 dB / 1 mW (acoustic level. Pressure at 1 kHz)
- Cable length: 1.2 m ± 5%
- Connector: 3.5 mm

SEP 255 PK
SEP 255 BL

HEADPHONES

- Speaker diameter: Ø 30 mm
- Children Noise Protection, 85 dB max.
- Impedance: 32 Ohm +/- 10 %
- Frequency Range: 20 Hz - 20 kHz
- Sensitivity: 85 dB +/- 3 dB /1 mW (accoustic pressure level at 1 kHz)
- Cord Length: 1.2 m +/- 5 %
- Connector: 3.5 mm

SEP 626

HEADPHONES

- Speaker diameter: Ø 40 mm
- Stylish Modern Design
- Comfortable Ear Upholstery and Headband
- Impedance: 32 Ohm +/- 10 %
- Frequency Range: 20 Hz - 20 kHz
- Sensitivity: 106 dB +/- 3 dB /1 mW (accoustic pressure level at 1 kHz)
- Cord Length: 2.2 m +/- 5 %
- Connector: 3.5 mm Diameter

● SEP 428 BLACK
● SEP 428 GREY
HEADPHONES

- Speaker Diameter: Ø 30 mm
- Stylish modern design
- Comfortable padded headphones
- Impedance: 32 Ω + / - 10%
- Frequency Response: 18 Hz - 20 kHz
- Sensitivity: 116 dB + / - 3 dB / 1 mW (level of acoustic. Pressure at 1 kHz)
- Cable length: 1.2 m ± 5%
- Connector: 3.5 mm

○ SEP 275 BK
● SEP 275 GD
HEADPHONES

- Ultra Light Finish
- Comfortable Leatherette Upholstery
- Speaker Diameter: 40 mm Diameter
- Impedance: 32 Ohm +/- 10 %
- Frequency Range: 20 Hz - 20 kHz
- Sensitivity: 106 dB +/- 3 dB /1 mW (accoustic pressure level at 1 kHz)
- Cord Length: 2.2 m +/- 5 %
- Connector: 3.5 mm Diameter

○ SEP 629
HEADPHONES WITH MICROPHONE

- Speaker Diameter: Ø 40 mm
- Stylish modern design
- Comfortable leatherette upholstery
- Impedance: 32 Ω + / - 10%
- Frequency Response: 20 Hz - 20 kHz
- Sensitivity: 106 dB + / - 3 dB / 1 mW (level of acoustic. Pressure at 1 kHz)
- Cable length: 2,2 m ± 5%
- Connector: 3.5 mm
- Microphone: Ø 6.0x5.0 mm /: -42 dB + / - 3 dB

○ SEP 252
HEADPHONES WITH MICROPHONE

- Speaker Diameter: Ø 30 mm
- Impedance: 32 Ω + / - 10%
- Frequency Response: 20 Hz - 20 kHz
- Sensitivity: 95 dB + / - 3 dB / 1 mW (level of acoustic. Pressure at 1 kHz)
- Cable length: 1.2 m ± 5%
- Connector: 2 x 3.5 mm
- Microphone Sensitivity: 58 db-± 3dB Microphone frequency range: 30 Hz - 16 kHz

SEP 14

MICROPHONE

- Table PC Microphone
- Microphone Frequency range: 30 Hz - 16 kHz
- Microphone Sensitivity: -43 db ± 4 db
- Cable Length: 1.5m ± 5 %
- Jack: 3.5 mm

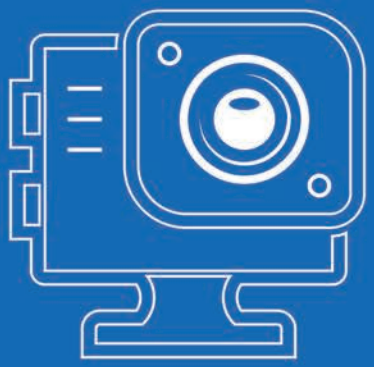

Cameras

78 ACTION CAMERAS
82 ACCESSORIES

3CAM 4K50WRB

ACTION CAMERA

- 4K Recording
- Remote Controller
- 2.0" TFT Color Display
- **Hardware:**
- CMOS Sony 117 Image Sensor
- Ambarella A12 Processor
- 6 -Layer Glass Lens
- Integrated WiFi
- Integrated Bluetooth for Remote Controller IPX7
- **Video Features:**
- 170° View Angle
- High Dynamic Range (HDR)
- Optical Image Stabilization
- **Video Resolution:**
- 4K - 3840 x 2160 (30/25fps)
- 2.8K 4:3 2880 x 2160 (30fps)
- 2.7K - 2704 x 1520 (30fps), Superview (30fps)
- 2.7K 4:3 - 2704 x 2028 (30fps)
- 1440p - 2560 x 1440 (60/30fps)
- 1440p - 1920 x 1440 (60/30fps)
- 1080p - 1920 x1080 (120/60/30fps), Superview (60/30fps)
- 960p - 1280 x 960 (120/60/30fps)
- 720p - 1280 x 720 (240/120/60/30), Superview (120/30fps)
- **Photo:**
- 16 Mpx / 14 Mpx / 12 Mpx / 8.3 Mpx / 5 Mpx / 3 Mpx (JPEG)
- Recording Modes:
- Slow Motion Recording
- Sport Mode
- Motion Detection
- Loop Recording
- **Others:**
- Waterproof: 60m

3CAM 4K20WR

ACTION CAMERA

- 4K Recording
- CMOS Sony Image Sensor
- 6 -Layer Glass Lens
- Remote Controller
- 2.0" TFT Color Display
- Integrated WiFi
- **Video Resolution:**
- 3840 x 2160 (30fps, MP4)
- 2688 x 1520 (30fps, MP4)
- 1920 x 1080 (60fps or 30fps, MP4)
- 1280 x 720 (120fps, 60fps or 30fps, MP4)
- **Photo:**
- 16 Mpx / 12 Mpx / 8 Mpx / 5 Mpx / 2 Mpx (JPEG)
- **Other:**
- 170° View Angle
- High Dynamic Range (HDR)
- Waterproof: 30m
- Slow Motion Recording
- Sport Mode
- Loop recording
- Anti-Shaking
- Support up to 32GB Micro SDHC card (not included)
- Battery: 3.7V/900 mAh Li-Ion
- Built-in Speaker
- Micro USB, Micro HDMI
- Dimension: 84 x 47 x 34mm
- Weight: 130g
- **Accessories:**
- 2x Batteries, Helmet mount set, Selfie or Tripod Mount Set, Handlebar or Pole Mount Set, Set for Mounting on Many Sports Equipment, 3M Adhesive Tapes, USB Data Cable, Charger, Docking Station for Battery Charging, User's Manual, Remote Controller with Band

3CAM 4K03WR
ACTION CAMERA

- 4K Recording
- CMOS Sony Image Sensor
- 6 -Layer Glass Lens
- Remote Controller
- 2.0" TFT Color Display
- Integrated WiFi
- **Video Resolution:**
- 3840 x 2160 (30fps, MP4)
- 2688 x 1520 (30fps, MP4)
- 1920 x 1080 (60fps or 30fps, MP4)
- 1280 x 720 (120fps, 60fps or 30fps, MP4)
- **Photo:**
- 16 Mpx / 12 Mpx / 8 Mpx / 5 Mpx / 2 Mpx (JPEG)
- **Other:**
- 170° View Angle
- High Dynamic Range (HDR)
- Waterproof: 60m
- Slow Motion Recording
- Sport Mode

3CAM 4K02W
ACTION CAMERA

- 4K Recording
- 6 -Layer Glass Lens
- 2.0" TFT Color Display
- 3840x2160 (30fps), 1920x1080 (60fps), 1280x720 (120fps)
- Integrated WiFi
- 170° View Angle
- High Dynamic Range (HDR)
- **Photo:** 16/12/8/5/2 MPx (JPEG)
- **Waterproof:** 60m
- Slow Motion Recording
- G-Sensor
- Sport Mode, Anti-Shaking
- Support up to 32GB Micro SDHC card (not included)
- Battery: 2x 3.7V/900 mAh Li-Ion
- Built-in Speaker
- Micro USB, Mini HDMI
- Dimension: 59 x 41 x 29mm
- Weight: 65g

3CAM 4K01W
ACTION CAMERA

- 4K Recording
- 6 -Layer Glass Lens
- 2.0" TFT Color Display
- Integrated WiFi
- 170° View Angle
- High Dynamic Range (HDR)
- **Video Resolution:**
- 3840 x 2160 (15fps, MP4)
- 2688 x 1520 (30fps, MP4)
- 1920 x 1080 (60fps or 30fps, MP4)
- 1280 x 720 (120fps, 60fps or 30fps, MP4)
- **Photo:**
- 16/12/8/5/2 MPx (JPEG)
- **Other:**
- **Waterproof:** 60m
- Slow Motion Recording
- G-Sensor
- Sport Mode
- Motion detection
- Loop recording
- Anti-Shaking

3CAM 5200W

ACTION CAMERA

- Full HD Recording
- 1.5" TFT Color Display
- Integrated WiFi modul
- 170° View Angle
- Waterproof: 60m
- High Dynamic Range (HDR)
- Video Resolution:
- 1920 x 1080 (30fps, AVI, interpolated)
- 1280 x 720 (30fps, AVI)
- **Photo:**
- 12/8/5 MPx (JPEG)
- **Other:**
- 170° View Angle
- Sport Mode
- Motion detection
- Loop recording
- G-Sensor
- Support up to 32GB Micro SDHC card (not included)
- Battery: 3.7V/900 mAh Li-Ion
- Built-in Speaker
- Micro USB, Micro HDMI
- Dimension: 59 x 41 x 29mm
- Weight: 65g
- **Accessories:**
- Battery, waterproof case, helmet mount set, set for mounting without waterproof case, selfie or tripod mount set, clothes attachment clip, handle bar or pole mount set, cable ties, 3M adhesive tapes, metal cable, USB data cable, USB charger, user's manual, wiping cloth

3CAM 2000

ACTION CAMERA

- Full HD Recording
- 1.5" TFT Color Display
- Waterproof: 60m
- High Dynamic Range (HDR)
- **Video Resolution:**
- 1920 x 1080 (30fps, AVI, interpolated)
- 1440 x 1080 (30fps, AVI, interpolated)
- 1280 x 720 (30fps, AVI)
- 840 x 480 (30fps, AVI)
- 640 x 480 (30fps, AVI)
- **Photo:**
- 12/10/8/5/3/2/1.3 MPx (JPEG)
- **Other:**
- 120° View Angle
- Sport Mode
- Motion detection
- Loop recording
- Support up to 32GB Micro SDHC card (not included)
- Battery: 3.7V/900 mAh Li-Ion
- Built-in Speaker
- Micro USB, Micro HDMI
- Dimension: 59 x 41 x 29mm
- Weight: 65g
- **Accessories:**
- Battery, waterproof case, helmet mount set, set for mounting without waterproof case, selfie or tripod mount set, clothes attachment clip, handle bar or pole mount set, cable ties, 3M adhesive tapes, metal cable, USB data cable, USB charger, user's manual, wiping cloth

3CAM HOLDER SET

ACCESSORIES

- Universal holder for head and chest for action video cameras
- Universal holder for most types of action video cameras
- Adjustable size for comfortable wear
- Attachment using universal system used by manufacturers of action video cameras
- Suitable for all types of sports and activities
- **Material:** ABS + Stretch Nylon
- **Weight:** 77 g (head), 150 g (chest)
- Tripod
- Plastic rubberized body for controlled attachment to all surfaces
- Adjustable size using removable parts of the structure
- **Material:** TPR (Thermoplastic rubber)
- Dimensions: 5 × 5 × 26 cm
- **Weight:** 151 g

3CAM CAR SET

ACCESSORIES

- Universal kit of holder and car charger for action video cameras
- Universal holder for most types of action video cameras
- Setting in 3 directions
- Attachment using universal system used by manufacturers of action video cameras
- **Material:** ABS + PVC
- Maximum load: 500 g
- Adapter
- Mini USB connector
- **Input voltage:** 12–24 V DC
- **Output voltage:** 5 V/1 A DC

3CAM WATER SET

ACCESSORIES

- Universal holder for most types of action video cameras
- Float
- **Material:** Neoprene SBR CR + High Density Pearl Cotton
- **Weight:** 20 g
- Floating Grip
- **Material:** PC Material + Iron Nickel Plating Screw
- **Dimension:** 155 x 42 x 60 mm
- **Weight:** 50 g

3CAM BATTERY

ACCESSORIES

- Spare Battery for SENCOR 3CAM
- 3.7V Li-Ion, 900mAh 3.33Wh

3CAM CHARGER SET

ACCESSORIES

- Dual Docking Charger Universal for all types of SENCOR
- Action Cameras Batteries
- **Input:** 5V/2A
- **Output:** 4.2V/0.75A (2x)
- Adapter
- **Input:** AC 100-240V ~ 60/50Hz
- **Output:** DC 5V/2A
- Cable with Micro USB Connector

House

84 WEATHER STATIONS
92 CLOCKS
96 TABLE LAMPS
97 WIRELESS DOORBELLS
98 DIGITAL PHOTOFRAMES

DCF signal

Colour displey

SWS 9700

WEATHER STATION

- Professional Weather Station with Wireless Thermometer and Hygrometer
- Wireless 5-in-1 Sensor
- 256 Colors Changing Display
- TRUE COLOR Display with Diagonal 5,8 inch (14,7 cm)
- 3 Color Changing Mode with TRUE BLACK Background:
- 12 ~ 24 Hour Forecast Based on Changing Air Pressure and Temperature
- Icon Weather Forecast (Sunny, Slightly Cloudy, Cloudy, Rainy, Stormy, Snowy)
- Barometric Pressure in Relative or Absolute Readings
- Max / Min Memory Records with Time-Date Stamps
- Past 24 Hours Hourly Record
- Alert Setting High / Low (Indoor / Outdoor Temperature and Humidity, Wind-Speed, and Rainfall)

SWS 8400
WEATHER STATION

- Weather Station with Wireless Thermometer and Hygrometer
- Wireless Sensor
- 256 Colors Changing Display
- TRUE COLOR Display with Diagonal 7,56´ (19,2 cm)
- 4 Color Changing Mode with TRUE BLACK Background:
- 1) LOOP: 256 Color Auto-Loop On / Off
- 2) RAINBOW: 8 Rainbow Color
- 3) OUTDOOR TEMP: 17 Color Change by Outdoor Temperature
- 4) ROTARY KNOB: 256 Color Fine Tuning Manually
- PMVA TRUE COLOR Display: Ultra High Contrast Ratio, Wide Viewing Angel, Sunlight Readability
- 12 ~ 24 Hour Forecast Based on Changing Air (Barometric) Pressure and Temperature
- Weather Forecast Icon (Sunny, Partly Cloudy, Cloudy, Rainy, Snowy)
- Indoor Temperature and Humidity Reading
- Outdoor Temperature and Humidity Reading
- Max / Min Memory Records
- Ice Alert Function

Colour display **DCF signal**

SWS 270
WEATHER STATION

- Weather Station with Wireless Thermometer and Hygrometer
- Radio Controlled Clock DCF
- Color Display with Diagonal 4,7´ (12 cm)
- Indoor Temperature Range: 0 to 50°C
- Outdoor Temperature Range: -50 to 70°C
- Indoor and Outdoor Humidity Range: 20 to 95% RH
- 12 Hour Forecast Based on Changing Air Pressure
- Power of Sensor: 2 x 1,5 V Type AAA (Not Included)
- Dimensions of Weather Station : 148 x 138 x 17,5 mm (wxhxd)
- Weight of Weather Station: 215 g
- Dimensions of Sensor: 50 x 105 x 34 mm
- Weight of Sensor: 45 g

Colour display **DCF signal**

SWS 215
WEATHER STATION

- Weather Station with Wireless Thermometer
- Radio Controlled Clock DCF
- Alarm with Snooze Function
- Display of Indoor and Outdoor Temperature
- 4 Icons of Weather Forecast
- Curved Large Blue LED Display 0,9" (2,3 cm)
- Temperature Range:
- Indoor: 0°C to +50°C
- Outdoor: -40°C to 70°C
- Accuracy:+1°C
- Hi - Lo Dimmer
- Transmission Range: up to 30 m in Open Area
- Wireless Sensor 433 MHz
- Desk Top Version
- Weight of Weather Station: 220 g
- Dimensions of Sensor: 50 x 105 x 35 mm
- Weight of Sensor: 45 g

DCF signal

DCF signal

SWS 240
WEATHER STATION

- Wireless Thermometer
- Radio controlled clock DCF
- Internal and external temperature
- Weather forecast with 4 icons
- Broadcasting frequency: 433 MHz
- The internal temperature of 0 ° C to 50 ° C
- Outdoor temperature: -25 ° C to 70 ° C
- Weather Station Power: 1 x 3V Battery CR2032 (not included) and AC adapter (included)
- Sensor supply: 2 x 1.5V AAA (not included)
- Weather Station Dimensions: 130 x 140 x 25 mm (WxHxD)
- Weather Station Weight: 195 g
- Sensor Dimensions: 50 x 105 x 34 mm
- Weight sensor: 45 g

DCF signal

SWS 212
WEATHER STATION

- Wireless Thermometer
- Radio Controlled Clock DCF
- Wireless Sensor for Measuring of Outdoor Temperature
- Curved Large Blue LED Display 0,9" (2,3 cm)
- Adjustable Display Brightness
- Radio Frequency: 433 MHz
- Transmission Range: up to 50 m in Open Area
- Temperature Range:
- Indoor: 0°C to +45 °C
- Outdoor: -40 °C to +70 °C
- Accuracy: +1°C
- Power: Mains Adaptor DC 4,5V/200mA (Included)
- Back-up Battery 1 x 3V Type CR2032 (Not Included)
- Power of Sensor: 2 x 1,5V Type AAA

Colour display **DCF signal**

SWS 280
WEATHER STATION

- Wireless Thermometer
- Color LCD Display
- Radio Controlled Time and Date
- Day of Week in 8 Languages Selectable
- Daily Snooze Alarm Function
- Indoor and Outdoor Temp - Humidity
- Indoor Measurable Range: -10 to 50°C
- Outdoor Measurable Range: -20 to 50°
- Indoor & Outdoor Measurable Range: 20 to 99% RH
- 24 Hour Max and Min Temp – Humidity
- Wall Mount or Desktop
- 433MHz RF Transmitting Frequency
- 30 m Transmission Range in an Open Area
- Power Supply:
- Main Unit: Battery 3 x 1,5 V Type AA (Not Included)
- Adaptor DC 4,5 V (Included)
- Sensor: 2 x 1.5V Type AAA
- Unit: 121 x 28 x 195 mm , Weight: 335 g

SWS 290
WEATHER STATION

- Wireless Thermometer
- Color LCD Display
- Time
- 12/24 Hour Selectable
- Indoor Temperature, Outdoor Temperature
- Indoor temperature range: -9 to +50
- Outdoor temperature range: -30 to + 55
- Temperature Accuracy: +1,5°C
- Outdoor Temperature Trend
- Record MIN/MAX Temperature
- Only One Sensor
- RF: 433 MHz
- Distance in open area up to 30 m
- Power – Main Unit: Battery 2 x 1,5V Type AAA(Not Included)
- Transmitter: Battery 2 x1,5 Type AAA (Not Included)
- Dimensions of Main Unit: 76 x 28 x 106 mm
- Weight: 81 g
- Dimensions of Transmitter: 60 x 27 x 96 mm
- Weight: 53 g

Colour display

SWS 260
WEATHER STATION

- Wireless Thermometer
- Time
- 12/24 Hour Selectable
- Indoor Temperature, Outdoor Temperature
- Indoor temperature range: -9 to +50
- Outdoor temperature range: -30 to + 55
- Temperature Accuracy: +1,5°C
- Outdoor Temperature Trend
- Record MIN/MAX Temperature
- Only One Sensor
- RF: 433 MHz
- Distance in open area up to 30 m
- Power – Main Unit: Battery 2 x 1,5V Type AAA(Not Included)
- Transmitter: Battery 2 x1,5 Type AAA (Not Included)
- Dimensions of Main Unit: 76 x 28 x 106 mm
- Weight: 81 g
- Dimensions of Transmitter: 60 x 27 x 96 mm
- Weight: 53 g

DCF signal ***Colour display***

SWS 65
WEATHER STATION

- Weather Station with Wireless Thermometer and Hygrometer
- Radio controlled clocks
- Range of measuring the internal temperature from 0 to 50 ° C
- Outdoor temperature measuring range of -20 to 60 ° C
- Indoor humidity measuring range 20% to 99% RH
- Measuring range of outdoor humidity 20% to 99% RH
- Baragraf for measuring atmospheric pressure
- Connection of up to 3 wireless sensors
- Transmission frequency: 433MHz
- Range outdoor up to 30 m
- The main station: 3 x 1.5V AAA
- Sensor: 2 x 1.5V AAA
- Dimensions (W x H x D): 125 x 173x 22 mm
- Weight: 300 g
- Sensor Dimensions: 95 x 60 x 25 mm
- Weight: 60 g

DCF signal

DCF signal

○ SWS 51 W
● SWS 51 B
WEATHER STATION

- Weather Station with Wireless Thermometer and Hygrometer
- Large Backlight Display
- Radio Controlled Clock
- Time, Date, Month, Day, Moon Phase
- 12/24 Hour Selectable, Alarm, Snooze
- Max./Min. Memory for Hygro-Thermometer
- Icons of Comfort Index
- Icons of Weather Forecast
- Humidity Measurement Accuracy: +8%
- No of Remote Unit: Up to 3 Units
- Radio Frequency: 433MHz, Max.30m in the Open Air
- Power:
- Main Unit: 3 x 1,5V Type AA
- Transmitter: 2 x 1.5V Type AAA
- Battery Not Included

New

○ SWS 3000 W
● SWS 3000 B
WEATHER STATION

- Weather Station with Wireless Sensor
- Weather Forecast Icon (Sunny, Slightly Cloudy, Cloudy, Rainy, Snow)
- Indoor Temperature and Humidity Reading
- Outdoor Temperature and Humidity Reading
- Indoor and Outdoor Temperature Trend
- Max / Min Memory Records
- Indoor Temperature Range: 0°C to +60°C
- Outdoor Temperature Range: - 20°C to +60°C
- Indoor and Outdoor Humidity Range: 20% to 90% RH
- Temperature Display with °C / °F Selectable
- Moon Phase, Digital Time
- Date and Weekday (Weekday in 7 languages: EN / IT / ES / DE / FR / NE / DA)
- Alarm and Snooze Function
- 12 / 24 Hours Selectable Format
- LCD Display with Short White Backlight
- Low Battery Indicator
- Desktop Placement or Wall Mountable

New

○ SWS 2900
WEATHER STATION

- Weather Station with Wireless Thermometer and Hygrometer
- LCD Display with Short Blue Backlight
- Digital Time
- 12 / 24 Hours Selectable Format
- Calendar
- Wake Up with Buzzer
- Alarm and Snooze Function
- Temperature Display with °C / °F Selectable
- Indoor Temperature Range: 0°C ~ +50°C
- Indoor Humidity Range: 20% ~ 90%
- Min / Max Temperature and Humidity Recording
- Power: 1 x 1,5 V type AA (Battery Not Included)
- Dimensions: (w / h / d) 93 x 94 x 38 mm
- Weight: 101 g

SWS 125
WEATHER STATION

- Wireless Thermometer
- Radio Controlled Clock and Calendar
- 12/24 Hour Selectable
- LCD with Blue Backlight
- Alarm and Snooze
- Indoor Temperature Range: 0°C to +50°C
- Outdoor Temperature Range: -20 to + 50
- Temperature Accuracy: +1,5°C
- Outdoor Temperature Trend
- Record MIN/MAX Temperature
- Display 3 Different Places of Temperature in 3 Different Channels
- RF: 433 MHz
- Distance in Open Area up to 30 m
- Power – Main Unit: Battery 2 x 1,5V Type AAA(Not Included)
  - Transmitter: Battery 2 x1,5 Type AAA (Not Included)

DCF signal

SWS 25 WS
SWS 25 BS
WEATHER STATION

- Wireless Thermometer
- Time
- 12/24 Hour Selectable
- Indoor Temperature, Outdoor Temperature
- Indoor temperature range: -9 to +50
- Outdoor temperature range: -30 to + 55
- Temperature Accuracy: +1,5°C
- Outdoor Temperature Trend
- Record MIN/MAX Temperature
- Only One Sensor
- RF: 433 MHz
- Distance in open area up to 30 m
- Power – Main Unit: Battery 2 x 1,5V Type AAA(Not Included)
  - Transmitter: Battery 2 x1,5 Type AAA (Not Included)
- Dimensions of Main Unit: 76 x 36 x 106 mm
- Weight: 75 g
- Dimensions of Transmitter: 60 x 27 x 96 mm
- Weight: 53 g

SWS 1500 W
SWS 1500 RD
SWS 1500 GN
SWS 1500 BU
SWS 1500 B
WEATHER STATION

- Thermometer with Alarm Clock
- Indoor Temperature and Humidity
- LCD Display with Short Blue Backlight
- Digital Time
- 12 / 24 Hours Selectable Format
- Calendar
- Wake Up with Buzzer
- Alarm and Snooze Function
- Temperature Display with °C / °F Selectable
- Indoor Temperature Range: 0°C ~ +50°C
- Indoor Humidity Range: 20% ~ 90%
- Min / Max Temperature and Humidity Recording
- Power: 1 x 1,5 V type AA (Battery Not Included)
- Dimensions: (w / h / d) 93 x 94 x 38 mm

MODEL	SWS 9700	SWS 8400	SWS 270	SWS 215	SWS 240	SWS 212	SWS 280	SWS 290
Radio controlled time	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No
Indoor temperature index	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Outdoor temperature index	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Date	Yes	Yes	Yes	No	No	No	Yes	No
Alarm	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Snooze	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Calendar	Yes	No	No	No	No	No	Yes	Yes
Moon phase	No	No	No	No	No	No	No	No
Barometric pressure	Yes	No	Yes	No	No	No	No	No
Pressure history	Yes	No	Yes	No	No	No	No	No
Weather forecast	Yes	Yes	Yes	Yes	Yes	No	Yes	Yes
Sensor in packaging	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Humidity	Yes	Yes	Yes	No	No	No	Yes	Yes
Wireless transfer from sensor	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Height (mm)	168	87,5	138	50	140	71	195	180
Width (mm)	136	230	140	105	130	253	121	105
Depth (mm)	24	49	18	35	25	45	28	55
Weight	370 g	307 g	215 g	45 g	195 g	180 g	335 g	170 g

color

color

color

color

MODEL	SWS 260	SWS 65	SWS 51	SWS 3000	SWS 2900	SWS 125	SWS 25	SWS 1500
Radio controlled time	Yes	Yes	Yes	No	No	Yes	No	No
Indoor temperature index	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Outdoor temperature index	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No
Date	Yes	Yes	Yes	Yes	Yes	Yes	No	No
Alarm	Yes	Yes	Yes	Yes	Yes	Yes	No	Yes
Snooze	Yes	Yes	Yes	Yes	No	Yes	No	Yes
Calendar	Yes	Yes	Yes	Yes	No	Yes	No	Yes
Moon phase	Yes	Yes	Yes	Yes	No	No	No	No
Barometric pressure	Yes	Yes	No	No	No	No	No	No
Pressure history	Yes	Yes	No	No	No	No	No	No
Weather forecast	Yes	Yes	Yes	Yes	No	No	No	No
Sensor in packaging	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No
Humidity	Yes	Yes	Yes	Yes	Yes	No	No	Yes
Wireless transfer from sensor	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No
Height (mm)	136	125	140	161	98	150	106	94
Width (mm)	161	173	185	80	142	80	76	93
Depth (mm)	30	22	30	23	22	25	36	38
Weight	478 g	300 g	330 g	165 g	160 g	140 g	75 g	101 g

Projection Clock

DCF signal

SDC 8200

PROJECTION CLOCK

- Projection Alarm Clock With Thermometer And Calendar
- 256 Colors Changing Display
- TRUE COLOR Display with Diagonal 4,3´ (11 cm)
- 3 Color Changing Mode with TRUE BLACK Background:
- 1) LOOP: 256 Color Auto-Loop On / Off
- 2) RAINBOW: 8 Rainbow Color
- 3) TUNE: 256 Color Manual-Tune
- PMVA TRUE COLOR Display: Ultra High Contrast Ratio, Wide Viewing Angel, Sunlight Readability
- Display of Time, Indoor Temperature and Date or Alarm
- Time and Temperature Projection
- Image 180° Rotation with Focus Adjustment
- Indoor Temperature, Max / Min Temperature Records
- 12 / 24 Hour Selectable, Calendar
- Dual Alarm
- Wake Up with Buzzer
- Snooze Function
- Radio Controlled Clock and Date by Signal DCF77
- Date and Weekday (Weekday in 5 Languages: EN / FR / DE / ES / IT)
- 3 Level Display Brightness: Hi / Lo / Off
- Desktop Usable
- Power Adapter: DC 4.5 V / 300 mA (Included)
- Consumption: 1.2 W
- Battery Back-Up: 1 x CR-2032 3 V (Included)
- Dimensions: (w / h / d) 163 x 80 x 56 mm
- Weight: 248 g (with Battery, without Adapter)

SDC 7200
CLOCK WITH ALARM

- Digital Alarm Clock With Thermometer and USB Charger
- 256 Colors Changing Display
- TRUE COLOR Display with Diagonal 3´ (7.6 cm)
- 3 Color Changing Mode with TRUE BLACK Background:
- 1) LOOP: 256 Color Auto-Loop On / Off
- 2) RAINBOW: 8 Rainbow Color
- 3) TUNE: 256 Color Manual-Tune
- PMVA TRUE COLOR Display: Ultra High Contrast Ratio, Wide Viewing Angel, Sunlight Readability
- Two USB Charging Ports (Total Maximum Output: 2.1 A)
- Display of Time, Indoor Temperature and Date
- Indoor Temperature (°C / °F)
- 12 / 24 Hour Selectable, Calendar
- Alarm: Wake Up with Buzzer
- Snooze Function
- 3 Level Display Brightness: Hi / Lo / Auto-Dimming
- Solar Panel for Auto-Adjust Backlight Brightness
- Date and Weekday (Weekday in 5 Languages : EN / FR / DE / ES / IT)
- Desktop Usable
- Power Adapter: DC 5 V / 2.5 A (Included)
- Consumption: 0.8 / 12 W (without / with Full Charging by USB)
- Battery Back-Up: 1 x CR-2032 3 V (Included)
- Dimensions: 138 x 68 x 47 mm (w / h / d)
- Weight: 147 g (with Battery, without Adapter)

USB charging port ***New***

SDC 5100
CLOCK WITH ALARM

- Digital Alarm Clock With USB Charger
- Big Display with Diagonal 5.1" (13 cm)
- White LED 1.8" (4,6 cm)
- Dimmer Function with Manual Brightness Tune by Rotary Control
- Brightness Levels: High / 80-10%
- USB Charging Port: 5 V / 2.1 A
- 24-Hour Time Display
- Dual Alarm
- Wake Up with Buzzer
- High-Low Buzzer Selection
- Snooze Function
- Desktop Usable
- Power supply: AC 100-240 V, 50 / 60 Hz
- Power Adapter: DC 5 V / 2.5 A (Included)
- Consumption: 1.2 W
- Battery Back-Up: 1 x CR-2032 3 V (Battery Not Included)
- Dimensions: (w / h / d) 174 x 74 x 100 mm
- Weight: 164 g (with Battery, without Adapter)

USB charging port

SDC 4600 GN
SDC 4600 OR
SDC 4600 WH

CLOCK WITH ALARM

- Digital Alarm Clock With USB Charger
- LED 0.6" (1.5 cm) Digits
- USB Charging Port: 5 V / 2.1 A
- 24-Hour Time Display
- Dual Alarm
- Wake Up with Buzzer
- Snooze Function
- Dimmer Function
- Brightness Levels: High / Low / Off
- Desktop Usable
- Power Supply: AC 100-240 V, 50 / 60 Hz
- Power Adapter: DC 5 V / 2.5 A (Included)
- Consumption: 1.2 W
- Battery Back-Up: 1 x CR-2032 3 V (Battery Not Included)
- Dimensions: (w / h / d) 135 x 58 x 95.5 mm
- Weight: 131 g (with Battery, without Adapter)

SDC 120

CLOCK WITH ALARM

- Digital Alarm Clock
- Curved Blue LED Display
- Size of Digits 4,7 cm(1,85´´)
- Dual Alarm
- Ascending Alarm
- Programmable Snooze from 5 to 60 Minutes
- Hi-Lo-Off Dimmer
- Battery Back up 1 x 3 V Type CR-2032 (Not Included)
- Power: Adaptor DC 5 V/300 mA (Included)
- Consumption: 1W
- Dimensions (W x H x D) 171 x 87 x 40 mm
- Weight: 140 g

○ SDC 4400
CLOCK WITH ALARM

- Digital Alarm Clock With USB Charger
- USB Charging Port: 5 V / 1000 mA
- LED Night Light
- Amber LED display 0.9"
- Dimmer Function
- Dual Alarm
- Wake Up with Buzzer
- Snooze Function
- Battery Back-Up CR-2032 1 x 3 V (Battery Not Included)
- Power supply: AC 100-240 V, 50 / 60 Hz
- Dimensions: (w / h / d) 135 x 68 x 60 mm
- Weight: 260 g (with AC / DC adaptor)

USB charging port

● SDC 2800 B
○ SDC 2800 W
CLOCK WITH ALARM

- Digital Alarm Clock with Thermometer
- LCD Display with Short White Backlight
- Nightlight Display Function
- Digital Time
- 12 / 24 Hours Selectable Format
- Calendar with 7 Weekday Languages
- Wake Up with Buzzer
- Dual Alarm
- Snooze Function
- Indoor Temperature Range: 0°C ~ +50°C
- Temperature Display with °C / °F Selectable
- Desktop Usable
- Power: 2 x 1,5 V type AAA (Batteries Not Included)
- Dimensions: (w / h / d) 129 x 67 x 40 mm
- Weight: 137 g

New

● SDC 1200 B
○ SDC 1200 W
CLOCK WITH ALARM

- Digital Alarm Clock
- Radio Controlled Clock by Signal DCF77
- LCD Display with Short White Backlight
- Digital Time
- 12 / 24 Hours Selectable Format
- Calendar with 7 Weekday Languages
- Wake Up with Buzzer
- Snooze Function (5 minutes)
- Indoor Temperature Range: 0°C ~ +60°C
- Temperature Display with °C / °F Selectable
- Power: 2 x 1,5 V type AAA (Batteries Not Included)
- Dimensions: (w / h / d) 78 x 78 x 30 mm
- Weight: 72 g

DCF signal

STL 201

TABLE LAMP

- Panel Consisting of 48 LEDs
- Power Output: 9,5W Max
- Number of Lumens: 300 lm
- Colour Temperature of Light: 5000-5500K
- CRI (Colour Rendering Index): >70
- Brightness Control: from 10 to 99
- Automatic Lamp Shut off Option Setting - Sleep (10,30,60 and 90 Minutes)
- Option to Set the Head Angle in a 180° Range
- Head Rotation up to 120°
- Lamp Arm Angle Setting Forward and Back in a 50° Range
- Lamp Arm Rotation Left-right at an Angle of 360°
- Backup Clock Battery CR2032 (included)
- Power Source: DC 12V/1000mA
- Dimensions: 170 x 170 x 450 mm
- Weight: 1.2 kg
- Power Input: 12 W

SWD 112
WIRELESS DOORBELL

- Contens of Door Bell and Two Buttons
- 48 tunes
- LED indicators on the bell and key
- Wireless digital doorbell chime is composed of two buttons
- Transmission frequency 433 MHz
- Button with IP44
- Range in open space without electromagnetic interference: up to 150 m
- LED indicators on the bell and key
- Bell Power: 230V, 50Hz
- Power button 1 x LR23 (included)
- Consumption: 3W
- Dimensions bell: 90 x 80 x 23 mm
- Weight: 95 g
- Dimensions of the 85 x 40 x 21 mm
- Weight: 35 g

IP44

SWD 110
WIRELESS DOORBELL

- Contens of Door Bell and Button
- 48 melodies
- Radio Frequency: 433 Mhz
- Button with IP 44 Protection
- Range: 150 m in Open Space without Electromagnetic Interference
- Optical Signalization on Door Bell and Button
- Power of Door Bell: ~230 V 50 Hz
- Power of Button: 1 x LR23A (Included)
- Consumption: 3W
- Dimensions of Door Bell: 90 x 80 x 23 mm
- Weight: 95 g
- Dimensions of Button: 85 x 40 x 21 mm
- Weight: 35 g

IP44

SWD 100
WIRELESS DOORBELL

- Contens of Door Bell and Button
- 48 melodies
- Radio Frequency: 433 MHz
- Button with IP 44 Protection
- Range: 150 m in Open Space without Electromagnetic Interference
- Optical Signalization on Door Bell and Button
- Power of Door Bell: 3 x 1,5 V, Type AAA
- Power of Button: 1 x LR23A (Included)
- Consumption: 80mW
- Dimensions of Door Bell: 89 x 81 x 24 mm
- Weight: 75 g
- Rozměry tlačítka: 85 x 40 x 21 mm
- Váha: 35 g

IP44

○ SDF 1271

DIGITAL PHOTOFRAME

- Digital Photo Frame
- 12,1 Inch (30,7 cm) 16:9 TFT LED Screen
- High Resolution 1280 x 800 Pixels
- Card Reader (SD/SDHC/MMC).
- USB 2.0 slot support
- Speaker: 2x2W
- Menu in CZ, SK, HU, PL, EN
- Video Player Format: 720P RMVB MPEG1(VCD, SVCD), MPEG2(DVD), MPEG4(DIVX,AVI)
- Audio Player Format: MP3, WMA
- Still Picture Formats JPEG
- Still Photo/Pictures Slideshow
- Adjustable Slideshow Interval
- Calender/Clock/Alarm/Timer
- Adjustable Brightness
- Remote Control
- Earphone output connector
- Wall mountable VESA 100 x 100 mm
- Desktop Stand

○ SDF 1060
● SDF 1060 B

DIGITAL PHOTOFRAME

- 10,2 Inch (25,9 cm) 16:9 LCD
- Screen
- Resolution 1024 x 600 Pixels
- Card Reader
- (MMC/SD/SDHC)
- Plug & Play by USB 2.0 Slot , Support
- USB Flash Drive
- Speaker : 1W x 2
- Menu in CZ, SK, HU, PL, EN
- Video Player Format: MPEG4/MPEG2/M-JPEG, Xvid, AVI
- Supports Still Picture Formats JPEG, BMP, GIF
- Still Photo/
- Pictures Slidshow
- Adjustable Slideshow Interval
- Music
- Format Support : MP3, MPEG1, MPEG2, OGG
- Calender/
- Clock/Alarm

○ SDF 873 W
● SDF 873 B

DIGITAL PHOTOFRAME

- 8 Inch (20,32 cm) 16:9 TFT LED Screen
- High Resolution 1280 x 768 Pixels
- Extra Slim Design
- Brightness: 200 cd/m2
- Contrast: 800:1
- Card Reader (SD/SDHC).
- USB 2.0 Micro
- Speaker: 1W
- Menu in CZ, SK, HU, PL, EN
- Video Player Format: H.264 / MOV / MJPEP / DIVX / AVI / MKV /MP4
- Still Picture Formats JPG / JPEG / BMP / PNG
- Still Photo/Pictures Slideshow
- Adjustable Slideshow Interval
- Music Format Support: MP3
- Calender/Clock/Alarm
- Adjustable Brightness and Contrast
- Remote Control
- AC Adaptor 100-240 V (included)
- Dimmensions: 195x140x52mm (wxhxd)

○ SDF 872 W
● SDF 872 B

DIGITAL PHOTOFRAME

- 8 Inch (20,5 cm) 4:3 TFT LED
- Screen • High Resolution 1024 x 768 Pixels • Brightness: 200
- cd/m2 • Contrast: 300:1 • 3 in-1 Card Reader (MMC/SD/
- SDHC). • Support USB Flash Drive. • Speaker: 1W • Menu in
- CZ, SK, HU, PL, EN • Video Player Format: MPEG1, MPEG2,
- MPEG4 (Divx4.0, Divix5.0, Xvid) AVI/M-JPEG etc. • Support
- video below 720p and 720 p • Still Picture Formats JPEG • Music
- Format Support: MP3 • Calender/Clock/Alarm • Remote
- Control • AC Adaptor 100-240 V (included) • Dimmensions:
- 220x176x25mm (wxhxd) • Weight: 380 g

○ SDF 740 GY
● SDF 740 BK

DIGITAL PHOTOFRAME

- 7 Inch (17,8 cm) 16:9 LCD Screen
- High Resolution 800 x 480 pixels
- LED Backlight
- Card Reader (SD/SDHC/MMC/MS).
- USB 2.0 Slot Supports USB Flash drive.
- Menu in CZ, SK, HU, PL, EN
- Supports Still Picture Format JPEG
- With Calendar & clock function
- Still Photo/Pictures Slidshow
- Adjustable Slideshow Interval
- Adjustable Brightness
- Foldable Stand
- AC Adaptor DC 5V/1.0A Included
- Power Consumption: <5W
- Dimensions: 205x140x22mm (wxhxd)
- Weight: 350 g

CERTIFIED USB

● SDF 733 B
○ SDF 733 W

DIGITAL PHOTOFRAME

- 7 Inch (17,8 cm) 16:9 TFT LED Screen
- High Resolution 800 x 480 Pixels
- Card Reader (SD/SDHC/MMC).
- USB 2.0 slot support
- Menu in CZ, SK, HU, PL, EN
- JPEG Compatible Picture Format
- Adjustable Slideshow Effect
- Adjustable Slideshow Interval
- Adjustable Contrast and Color Saturation
- Picture Zoom/Rotate/Size Function
- Wall mountable
- Desktop Stand
- AC Adaptor 100-240 V/ DC 5 V 1 A (included)
- Dimmensions: 205x142x24mm
- Front
- 7 " TFT LED HD Pannel
- High Resolution 800 x 480 Pixel
- Picture slideshow

Car accessories

101 CAR RADIOS
105 SUBWOOFERS
106 SPEAKERS
107 FM MODULATORS
108 CAR CAMERAS
109 PARKING SYSTEMS
110 CAR CONVERTERS AND CHARGERS
111 ALCOHOL TESTERS
112 COVERS

BT 2.1

SCT 9411BMR

CAR RADIO

- Features
- 7" Touch Screen TFT Color LCD Screen with Widescreen Image (16:9)
- Full-Motorized Monitor Mechanism
- Resolution: 800 x 480
- Automatic Tilt and In / Out Adjustment
- Tuners
- PLL FM/AM (18 Presets for FM, 12 Presets for AM)
- RDS (Radio Data System)
- PTY, AF, TA, PS
- Sound
- Music Formats: MP3, WMA, OGG Vorbis, FLAC, APE, AAC, AC3, DTS, PCM, RA
- Output power 4 x 40 W max.
- Equalizer (Standard, Classic, Rock, Pop, Classic, Jazz, Electric)
- Bass & Treble Controls
- Balance & Fader Controls
- Video, Picture
- Video Formats: MKV, AVI, MOV/MP4, ASF, FLV, RMVB, MPG/VOB, WMV, 3GP, DAT
- Pictures: JPEG, GIF, BMP, PNG, TIFF
- Connectivity
- Bluetooth 2.1 A2DP (Music Stream, Calling)
- USB port (1A Charging)
- SD/MMC Slot
- Front A/V Input
- Others
- Full Detachable Front Panel
- Adjustable Backlight Colors (Green/Blue/Red/Yellow/Cyan/Fuchsine/White)
- Digital Clock
- Input for Connection Rear Camera
- Front and Rear RCA
- Subwoofer Output
- ISO Connector
- Remote Control
- Power Supply 12V (11-14.4V)

SCT 8017
CAR RADIO

- Features
- 3" TFT Display
- Full Detachable Front Panel
- Blue Backlight
- Digital Clock
- Tuners
- PLL FM/AM (18 Presets for FM, 12 Presets for AM)
- RDS (Radio Data System)
- PTY, AF, TA, PS
- Sound
- MP3, WMA, FLAC, OGG
- Output power 4 x 40 W max.
- Equalizer (3 Band)
- Bass & Treble Controls
- Video, Picture
- MP4, MOV, AVI, MKV, FLV, WMV, TS, ASF, PMP, RMVB, MPG, VOB
- JPEG, GIF, BMP, PNG
- Connectivity
- Bluetooth 2.1 A2DP
- USB port

BT 2.1 CERTIFIED USB SD™

SCT 6011
CAR RADIO

- Features
- Full Detachable Front Panel
- Blue Backlight
- Digital Clock
- Tuners
- DAB+ (Digital Audio Broadcasting)
- PLL FM/AM (18 Presets for FM, 12 Presets for AM)
- RDS (Radio Data System)
- PTY, AF, TA, PS,CT
- Sound
- MP3,WMA,FLAC, WAV, AAC
- Output power 4 x 40 W max.
- Equalizer (7 Band)
- Bass & Treble Controls
- Balance & Fader Controls
- Loudness
- Connectivity
- Bluetooth 2.1 A2DP (Music Stream, Calling)
- USB Port (1A Charging)

BT 2.1 CERTIFIED USB SD™

SCT 5051
CAR RADIO

- Features
- Full Detachable Front Panel
- Adjustable Backlight Colors (GREEN/BLUE/YELLOW/CYAN/PURPLE/WHITE)
- Digital Clock
- Tuners
- PLL FM/AM (18 presets for FM, 12 presets for AM)
- RDS (Radio Data System)
- Sound
- MP3,WMA,FLAC, WAV
- Output power 4 x 40 W max.
- 2 Band Equalizer (7 Presets)
- Bass & Treble Controls
- Balance & Fader Controls
- Loudness
- Connectivity
- Bluetooth 2.1 A2DP (Music Stream, Calling)
- USB port
- SD/MMC Slot
- Front AUX Input
- Others
- Rear RCA

BT 2.1 CERTIFIED USB SD™

SCT 5017
CAR RADIO

- Features
- Integrated Bluetooth Receiver and Microphone
- MP3/WMA Player
- USB/SD/MMC Input
- Front AUX Input
- Full Detachable Front Panel
- LCD Display with Scrolling Text
- Radio Data Systém (RDS)
- 30 Synthesized AM/FM Tuner (18 for FM, 12 for AM)
- Preset EQ Curves
- Separate Bass & Treble Controls
- Balance & Fader Controls
- Loudness
- RCA Line Out
- Remote Control
- Output Power: 40 Watts x 4 Ch
- ISO-DIN Mounting

SCT 4058
CAR RADIO

- Features
- USB port + SD/MMC slot for flash card
- Output power 4 x 40 W max.
- RDS (PTY, AF, TA, PI, PS)
- PLL FM/AM tuner, 18 presets for FM, 12 preset for AM
- MP3<(>,<)> WMA, ID3 Tag, Equalizer, bass enhancement
- Digital clock
- Adjustable illumination color (six colors - RED/PINK/PURPLE/BLUE/CYAN/GREEN)
- Removable front panel
- Front Line-In (Cinch)
- Amplifier Line-Out (Cinch)
- Integrated ISO connector
- Power supply 13.8 V (10.8-15.6 V)
- Weight 1.1 kg

SCT 4056
CAR RADIO

- Features
- USB port + SD/MMC slot for flash card
- Output power 4 x 40 W max.
- RDS (PTY, AF, TA, PI, PS)
- PLL FM/AM tuner, 18 presets for FM, 12 preset for AM
- MP3,WMA, ID3 Tag, Equalizer, bass enhancement
- Digital clock
- Adjustable illumination color (six colors - RED/PINK/PURPLE/BLUE/CYAN/GREEN)
- Removable front panel
- Front Line-In (Cinch)
- Amplifier Line-Out (Cinch)
- Integrated ISO connector
- Power supply 13.8 V (10.8-15.6 V)
- Weight 1.1 kg

SCT 4055
CAR RADIO

- Features
- USB port + SD/MMC slot for flash card
- Output power 4 x 40 W max.
- RDS (PTY, AF, TA, PI, PS)
- PLL FM/AM tuner, 18 presets for FM, 12 preset for AM
- MP3<(>,<)> WMA, ID3 Tag, Equalizer, bass enhancement
- Digital clock
- Adjustable illumination color (six colors - RED/PINK/PURPLE/BLUE/CYAN/GREEN)
- Removable front panel
- Front Line-In (Cinch)
- Amplifier Line-Out (Cinch)
- Integrated ISO connector
- Power supply 13.8 V (10.8-15.6 V)
- Weight 1.1 kg

SCT 3018
CAR RADIO

- Features
- MP3/WMA Player
- USB/SD/MMC Input
- Front AUX Input
- Full Detachable Front Panel
- LCD Display with Scrolling Text
- Radio Data Systém (RDS)
- 30 Synthesized AM/FM Tuner (18 for FM, 12 for AM)
- Preset EQ Curves
- Separate Bass & Treble Controls
- Balance & Fader Controls
- Loudness
- RCA Line Out
- Remote Control
- Output Power: 40 Watts x 4 Ch
- ISO-DIN Mounting

SCT 3017
CAR RADIO

- Features
- MP3/WMA Player
- USB/SD/MMC Input
- Front AUX Input
- Full Detachable Front Panel
- LCD Display with Scrolling Text
- Radio Data Systém (RDS)
- 30 Synthesized AM/FM Tuner (18 for FM, 12 for AM)
- Preset EQ Curves
- Separate Bass & Treble Controls
- Balance & Fader Controls
- Loudness
- RCA Line Out
- Remote Control
- Output Power: 40 Watts x 4 Ch
- ISO-DIN Mounting

SCS WA 1203
SUBWOOFER

- Features
- 12" Active Subwoofer
- 300mm Black Paper and Non-press Cone
- Fine Quality NBR Rubber-Edge
- Round High Density Paper Tube
- With High Power and Low Distortion Amplifier
- Woofer Diameter 30 cm (12")
- Max. Peak Output Power 600 W
- Max. RMS Power Output 300W
- THD < 0.5%
- Full Frequency Range 25 - 3000 Hz + / -1.0 db
- Frequency Low Pass 50 - 500Hz + / -1.5 db
- Adjustable Low Pass Filter
- Input Sensitivity 0.15 ~ 8V
- Speaker Impedance 4Ω
- Stereo RCA Input Connectors

30 cm **600 W**

SCS WA 1003
SUBWOOFER

- Features
- 10" Black Paper and Non-press Cone
- Fine Quality NBR Rubber-Edge
- Round Horn Type Tube
- High Power and Low Distortion Amplifier
- Woofer Diameter 25 cm (10")
- Max. Peak Output Power 400 W
- Max. RMS Power Output 120 W
- Full Frequency Range 40 - 3000 Hz + / -1.0 dB
- Frequency Low Pass 50 - 250Hz
- Adjustable Low Pass Filter
- Adjustable Phase Shift 0° - 180°
- Adjustable Volume
- Input Sensitivity 0.2 ~ 6V
- Speaker Impedance 4#
- Stereo RCA Input Connectors
- Dimensions (WxHxD): 450x288x306 mm
- Weight: 6.7 Kg

25 cm ***400 W***

86 DB

SCS BX 6902
SPEAKER

- 6"x 9" Oval
- Dimension 165x235 mm
- 4-Band Coaxial
- Rubber Membrane Suspension
- Coil Diameter 1.25" (30 mm) ASV
- Diameter 58 mm Mid Speaker
- Diameter Piezo Tweeter 2x15 mm
- Frequency Range 65-20000Hz
- Sensitivity 86dB/W/m
- Impedance: 4
- Nominal Power 35W
- Maximum Power 105W
- Magnet Dimensions 100x60x18 mm
- Mounting Depth 80 mm

17 CM 85 DB

SCS BX 1602
SPEAKER

- 6.5"/17 cm in Diameter
- 2-Band Coaxial
- Rubber Membrane Suspension
- Coil Diameter 1" (25 mm) ASV
- Diameter 28 mm Tweeter
- Frequency Range 78-20000Hz
- Sensitivity 85dB/W/m
- Impedance: 4
- Nominal Power 30W
- Maximum Power 90W
- Magnet Size 80x40x15 mm

***13 cm* 84 DB**

SCS BX 1302
SPEAKER

- 5.25"/13 cm in Diameter
- 2-Band Coaxial
- Rubber Membrane Suspension
- Coil Diameter 1" (25 mm) ASV
- Diameter 28 mm Tweeter
- Frequency Rrange 95-20000Hz
- Sensitivity 84dB/W/m
- Impedance: 4
- Nominal Power 25W
- Maximum Power 75W
- Magnet Size 70x32x10 mm

***10 cm* 84 DB**

SCS BX 1002
SPEAKER

- 4"/10 cm in Diameter
- 2-Band Coaxial
- Rubber Membrane Suspension
- Coil Diameter 1" (25 mm) ASV
- Diameter 28 mm Tweeter
- Frequency Range 105-20000Hz
- Sensitivity 84dB/W/m
- Impedance: 4
- Nominal Power 20W
- Maximum Power 60W
- Magnet Size 70x32x10 mm

SWM 101
FM MODULATOR

- USB or Audio Input
- LED Display
- Remote Control
- 199 FM Channels
- Volume Control
- Equalizer
- Pause, Previous/Next Control
- 12 V Car Power Plug
- Audio Cable Included

SWM 151
FM MODULATOR

- SD/MMC/USB and audio input
- Backlighted LCD display
- Image name of the file on RDS receiver
- Remote control
- 206 FM Channels
- Volume control
- Equalizer
- Pause, Previous/Next Control
- 12 V Car Power Plug
- Audio cable included

SWM 160
FM MODULATOR

- SD/MMC/USB and audio input
- Large backlighted LCD display
- Remote control
- 206 FM channels
- Volume setting
- Equalizer
- Pause function
- Back / Forward
- Power 12 V auto connector
- Audio cable included

SCR 4100
CAR CAMERA

- Full HD
- Steel Slim Body
- 170° Viewing Angle with IR Lights
- G-Sensor
- **Display:** 2.7" LCD
- Parking Assistance
- Motion Detection
- **Video Resolution:**
- 1920×1080 (16:9, 30 fps)
- 1280×720 (16:9, 30 fps)
- **Photo:**
- 3 MPx, JPEG (12M, 10M, 8M, 5M, 3M)
- **Other:**
- Multilingual Language OSD
- Storage: Micro SD Card up to 32 GB (not included)
- Battery: Built-in 3,7V/240mAh Li-ion
- Mini USB Port, HDMI port
- **Dimension:** 87 x 53 x 29 mm
- **Accessories:** Car Mount, Car Charger, USB Cable, User Manual

FULL HD 1920x1080 **170°** **IR**

SCR 2100
CAR CAMERA

- Full HD
- Steel slim body
- 120° Viewing Angle with IR Lights
- G-Sensor
- **Display:** 2.7" LCD
- Parking Assistance
- Motion Detection
- **Video Resolution:**
- 1920×1080 (16:9),24 fps, AVI (MJPEG)
- 1440×1080 (4:3), 30 fps, AVI (MJPEG)
- 1280×720 (16:9), 30 fps, AVI (MJPEG)
- 640×480 (4:3), 30 fps, AVI (MJPEG)
- **Photo:**
- JPEG (Upscale 12M, 10M, 8M, 5M, 3M)
- **Other:**
- Multilingual Language OSD
- Storage: Micro SD Card up to 32 GB (not included)
- Battery: Built-in 3,7V/300mAh Li-ion
- Mini USB Port, HDMI port
- **Dimension:** 87 x 57 x 29 mm
- **Accessories:** Car Mount, Car Charger, USB Cable, User Manual

FULL HD 1920x1080 **120°** **IR**

SCA 200
PARKING SYSTEM

- 4 Parking Sensor System
- Showing the Distance from the Obstacle on the Display
- Automatic Activation When the Reverse Gear Chosen
- Wireless Connection Between Display and Control Box
- Audible/Voice Warnings Available (Attention/Warning/Stop)
- Obstacle Detection from 0.3 to 2 m from the Bumper
- All Weather Design (-40° to +80° C)
- Suitable for All Cars
- Pack Contains: 1 Command Module, 4 Ultrasonic Sensors (Shiny Black), 1 Acoustic Ildicator – Wireless LCD Display, 1 Power Supply Cable, 1 Hole Borer, 1 Accessory Kit, 1 Instruction Manual

SCA 100
PARKING SYSTEM

- 4 Parking Sensor System with a Sound Detection of Obstacles
- Automatic Activation When the Reverse Gear is Chosen
- Alarm in Three-Stage Sound: Beep Sound (the Faster, the Closer to Obstacle)
- Obstacle Detection from 150 cm to 80 mm from the Bumper
- Anti-False Installation Technology
- All Weather Design (-40° to +80° Celsius)
- High Quality and Easy to Install
- Pack contains:
- 1 command module
- 4 ultrasonic sensors (shiny black)
- 1 acoustic indicator
- 1 power supply cable
- 1 hole borer
- 1 accessory kit
- 1 instruction manual

SCH 440
CAR ADAPTER

- Car USB Charger & Tripple socket
- USB Charger Output 5V/500 mA
- Suitable to Charge Phone, PDA, MP3 Player etc.
- Triple Socket with 12 V/5 A Output (Total Max.)
- 5 A Fuse
- Cigarete lighter plug with 50 cm cord

SCA INV 140
INVERTOR

- Car Power Inventer
- Permanent Power 140 W, Peak Power 280 W
- Input 12 V DC
- Output 220-240 V AC
- Low and High Input Voltage Protection

SCH 340
CAR ADAPTER

- USB Charger with Two Ports - 5V / max. 2,1A
- Input Voltage12V DC
- Output to two USB (5V/2.1A + 2,1A)
- Available for Mobile Phones<(>,<)> iPhones<(>,<)> iPad etc
- Simultaneous Charging of Two Devices
- Dimensions: 88 x 31 x 26 mm
- Weight: 30 g

SCH 311
CAR ADAPTER

- USB charger 5V/1A
- For charging mobile phones, smartphones and other mobile devices.
- Input voltage DC 12-24V
- Smart fuse for surge protection
- Dimensions: 19 x 18 x 65 mm
- Weight: 12 g

SCA BA 02
ALCOHOLTESTER

- Used to View the Content of Alcohol in Breath
- Measuring Range: 0,2 - 1,5‰ ("LO"< 0,2‰)
- Warning Calibration Value: > 0,2‰
- Unit: ‰ (nebo % BAC nebo mg/l; optional)
- Digital LCD Display with Bicolor Backlighting
- Real Time Clock
- Temperature Indicator
- Acoustic and Video Signalization
- Auto-Self Cleaning
- Low Power Consumption
- Accessories: 3 Blowing Tubes
- Dimensions (w h d): 43 x 105 x 23 mm
- Weight: 50g (without Batteries)

SCA BA 01 V2
ALCOHOLTESTER

- Used to View the Content of Alcohol in Breath
- Measuring range: 0.1 - 4th
- Alarming value:> 0.2.
- Unit:. (or% BAC or mg / l; optional)
- Digital LCD display with bi-colored backlight
- Simple control with just one button
- Acoustic and graphic semaphore
- automatic self-cleaning
- Low power consumption
- Accessories: 3 mouth tube
- Dimensions instrument (in h): 36x98x16 mm
- Weight of device: 27 g (without battery)

SCA BA 01
ALCOHOLTESTER

- Used to View the Content of Alcohol in Breath
- Measuring Range: 0,1 - 1,5‰
- Warning Calibration Value: > 0,2‰
- Unit: ‰ (nebo % BAC nebo mg/l; optional)
- Digital LCD Display with Bicolor Backlighting
- Easy One Key Operation
- Acoustic and Video Signalization
- Auto-Self Cleaning
- Low Power Consumption
- Accessories: 3 Blowing Tubes
- Dimensions (w h d): 36 x 98 x 16 mm
- Weight: 27g (without Batteries)

SCA BA 99
REPLACEMENT BLOWING TUBE

- Blowing tubes
- Quantity: 3 pcs
- Dimensions: 100 x 6 mm

SCA SH 1001

COVER

- 12V Heated Seat Cushion
- Temperature Control Switch: HI/OFF/LO
- Temperature:
- LOW - 32.2° C
- HIGH - 49° C
- Fused Plug Guards Against Overheating
- Heated Areas: Back/ Lumbar / Seat Bottom
- Fits with all cars
- Power Consumption:
- HIGH - 48W DC, 3-4A
- LOW - 36W DC, 3-4A
- Fuse: 10A

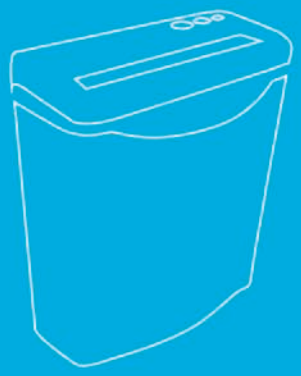

Office

114 SHREDDERS
116 TRIMMERS
117 LAMINATORS
118 LAMINATED FOILS

SSK 482
SHREDDER

- Paper, CD, Credit Card Shredder
- For Easy and Quick Destruction of Confirdential Documents, CDs and Credit Cards
- Simple and Convenient Emptying with Pull-Out Basket (14 litres)
- 4 Lockable Castor Wheels
- Entry Width for up to 220 mm (A4)
- Cutting Capacity: Max. 10 Sheets A4 (80 g/m2)/ 1 CD/ 1 Credit Card
- Cutting Speed: 2m/min for 1 Sheet ; 1,5m/min. for 10 Sheets (80 g/M2)
- Reverse Function for Clearing Paper Jams
- Cut Type: Cross Cut
- Cut Format: 5 x 16 mm
- Security Class 4
- Protection Class II
- Automatic Startr/Stop Function
- Technical specification
- Cross Cut 10 Sheets (80g/M2)
- Auto Start / Stop
- Reverse Feature
- Shred Size 5 x 16 mm
- 220 mm Entry Width
- Noise Level Less Than 70 dB
- 2 m / min Shred Speed
- Strip Cut CD/DVD into 4 Parts
- Practical 4 rollers
- Pull out waste basket
- Basket Capacity 14 l
- Power: AC 220-240 V / 300 W
- Dimensions: 344 x 210 x 445 mm
- Weight: approx. 5,4 kg

SSK 360
SHREDDER

- Cross Cut 6 Sheets
- Auto Start / Stop / Reverse Feature
- Shred Size 5 x 38 mm
- 220 mm Entry Width
- Noise Level Less Than 72 dB
- 2,2 m / min Shred Speed
- Basket Capacity 10 l
- Dimensions : 302 x 137 x 313 mm

SSK 350
SHREDDER

- 5 Sheets (80g/M2)
- Auto Start / Stop
- Reverse Feature
- Shred Size 4 x 40 mm
- 220 mm Entry Width
- Noise Level Less Than 72 dB
- 2,2 m / min Shred Speed
- Basket Capacity 8,5 l
- Power: AC 240 V / 150 W
- Dimensions: 295 x 155 x 290 mm (LxWxH)
- Weight: approx. 3,3 kg

SSK 160
SHREDDER

- Strip Cut 6 Sheets (80g/m2)
- Auto Start / Stop / Reverse Feature
- Shred Size 6 mm strip
- 220 mm Entry Width
- Noise Level Less Than 70 dB
- 2,2 m / min Shred Speed
- Paper Bin Volume 7 l
- Compatible Basket Diameter 27,5 - 37,5 cm
- Power : 220-240 V/50 Hz; 190 W/1A
- Dimensions : 312 x 118 x 386 mm
- Weight : 1,4 kg

SSK 060
SHREDDER

- Paper Shredder
- Strip Cut 6 Sheets
- Auto Start / Stop / Reverse Feature
- Shred Size 6 mm strip
- 220 mm Entry Width
- Noise Level Less Than 70 dB
- 2,2 m / min Shred Speed
- Compatible Basket Diameter 27,5 - 37,5 cm
- Power : 220-240 V/50 Hz; 190 W/1A
- Dimensions : 302 x 113 x 68,5 mm
- Weight : 0,93 kg

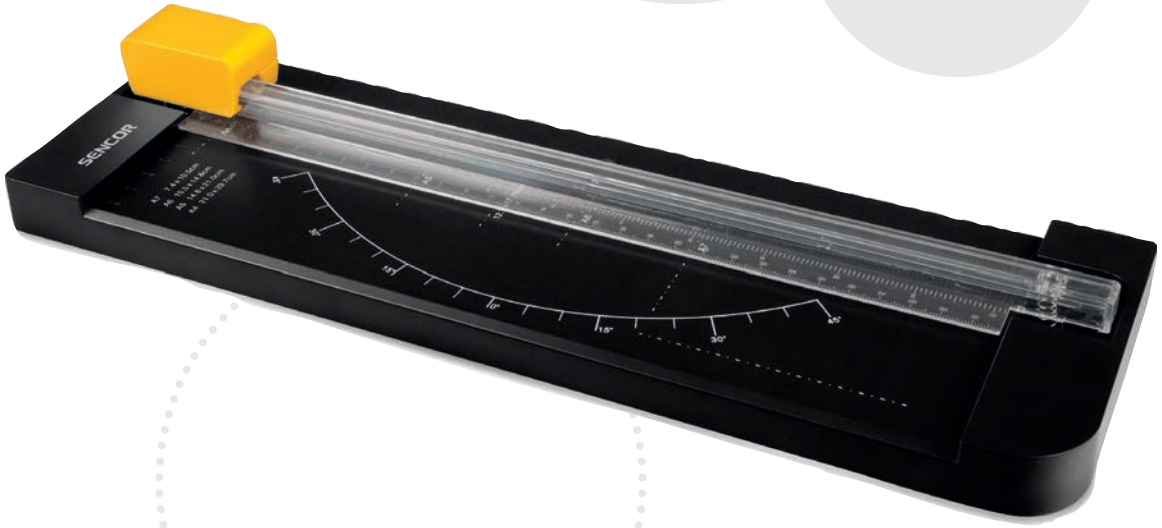

STR 210

TRIMMER

- A4 Personal Paper Trimmer
- Cutting Lenght 310 mm
- Includes 3 Blades Straight/Wave/Perforation
- Straight Cut 5 Sheets
- Perforation Cut 3 Sheets
- Wave Cut 3 Sheets
- Dimensions : 382 x 120 x 55 mm
- Trimmer is Ideal for: Trimming Computer Prints, Photographs, Business Cards, Labels, Posters and many More Making Your Own Cards, Crafts and Invitations
- Adult supervision required for children between the ages of 12 and 16. Not suitable for children under 12.

SLA 310
LAMINATOR

- A3 Personal Laminator
- Laminates up to A3 Size Photos and Documents
- Operates with 150-250 (2x75 - 2x125) Micron Pouches
- Fast Warm-Up 4-5 min
- Easy to Use
- Uses 50% less Energy*
- *In Comparison to Conventional Laminators
- Quiet Twin-Roller Feed Mechanism
- ABS Function - Quick Release of Jammed Pouches
- Approx 300 mm/min Laminating Speed
- For hot or cold laminating
- Dimmensions : 475x164x68mm
- Weight: 1,5 kg
- Ideal for Laminating:

SLA 210
LAMINATOR

- A4 Personal Laminator
- Laminates up to A4 Size Photos and Documents
- Operates with 150-250 (2x75 - 2x125) Micron Pouches
- Fast Warm-Up 3-4 min
- Easy to Use
- Uses 50% less Energy*
- *In Comparison to Conventional Laminators
- Quiet Twin-Roller Feed Mechanism
- ABS Function - Quick Release of Jammed Pouches
- Approx 300 mm/min Laminating Speed
- For hot or cold laminating
- Dimmensions : 330x190x57mm
- Weight: 0,83 kg
- Ideal for Laminating:

SLA 220
LAMINATOR

- A4 Personal Laminator
- Laminates up to A4 Size Photos and Documents
- Operates with 150-250 (2x75 - 2x125) Micron Pouches
- Fast Warm-Up 3-4 min
- Easy to Use
- Uses 50% less Energy*
- *In Comparison to Conventional Laminators
- Quiet Twin-Roller Feed Mechanism
- ABS Function - Quick Release of Jammed Pouches
- Approx 300 mm/min Laminating Speed
- For hot or cold laminating
- Dimmensions : 333x141x60mm
- Weight: 0,83 kg

SLA 200
LAMINATOR

- A4 Personal Laminator
- To foil 100 to 160 microns
- Width 236 mm inlet
- Laminating speed of about 30 cm / min
- Fast heat for 3-5 minutes
- Silent-cylinder sliding system
- Ideal for small offices and home
- Power: AC 220-240 V, 220 W
- Dimensions: 330 x 118 x 88 mm
- Ideal for laminating: Certificates, pictures, documents, drawings, printouts from the PC, invitations, photographs, calendar

SLA FA3 M 250
LAMINATED FOILS

- Laminating pouches A3
- The thickness of 2 x 125 micron
- Packing 25 pcs
- Translucent and durable
- Safe rounded corners

SLA FA3 M 150
LAMINATED FOILS

- Laminating pouches A3
- The thickness of 2 x 75 micron
- Packing 25 pcs
- Translucent and durable
- Safe rounded corners

SLA FA4 B 150
LAMINATED FOILS

- Laminating pouches A4
- The thickness of 2 x 125 micron
- Packing 100 pcs
- Translucent and durable
- Safe rounded corners

SLA FA4 M 250
LAMINATED FOILS

- Laminating pouches A4
- The thickness of 2 x 125 micron
- Packing 100 pcs
- Translucent and durable
- Safe rounded corners

SLA FA4 M 150
LAMINATED FOILS

- Laminating pouches A4
- The thickness of 2 x 75 micron
- Packing 25 pcs
- Translucent and durable
- Safe rounded corners

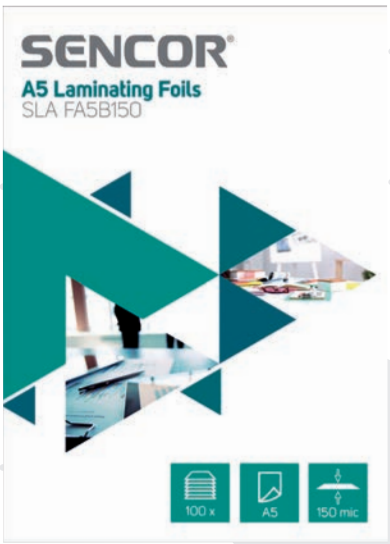

SLA FA5 B 150
LAMINATED FOILS

- Laminating pouches A5
- The thickness of 2 x 75 micron
- Packing 100 pcs
- Translucent and durable
- Safe rounded corners

SLA FA6 B 150
LAMINATED FOILS

- Laminating pouches A6
- The thickness of 2 x 75 micron
- Packing 100 pcs
- Translucent and durable
- Safe rounded corners

SLA FAM M 150
LAMINATED FOILS

- Laminating pouches A4, A5, A6
- The thickness of 2 x 75 micron
- Packing 3 x 25 pcs
- Translucent and durable
- Safe rounded corners

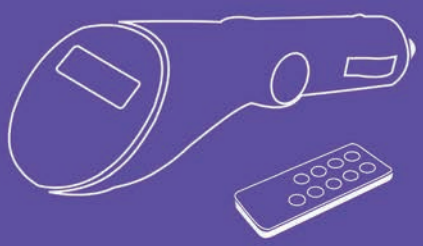

Others

121 TIMERS
122 USB CHARGERS
123 SOCKETS
124 MOBILE RADIOS
125 LIGHTS
129 CLEANING AGENTS
130 SURGE PROTECTORS
132 GAMES

SST 13D

TIMER

- Digital timer is intended for switching appliances powered by AC 230 V on and off at specified time intervals. The timer has up to 8 programming functions.
- There is easy access through functions: MANUAL ON/AUTO/MANUAL OFF)
- Voltage 230 V, 50 Hz
- Maximum load 16 A, 3600 W
- Operating temperature -10°C to +40°C
- Accuracy +/- 1 min per month

SST 12MDO

TIMER

- The mechanical daily timer is intended for switching appliances powered by AC
- 230 V on and off at specified time intervals. The timer can be switched on and off up to 48 times a day.
- Voltage 230 V, 50 Hz
- Maximum load 16 A, 3600 W
- Operating temperature -10°C to +40°C
- Clock accuracy +/- 5 min
- Accuracy for 30 min. +/- 5 seconds
- Accuracy for 1 hour +/- 10 seconds
- Accuracy for 6 hours +/- 1 min

SST 11MW

TIMER

- The mechanical timer can switch on and off appliances, which are supplied by AC power of 230 V in set time intervals. The timer can switch the power on and off up to 48 times a week in two hour intervals.
- Voltage 230 V, 50 Hz
- Maximum load 16 A, 3600 W
- Operating temperature -10°C to +40°C

SST 10MD

TIMER

- The mechanical daily timer is intended for switching appliances powered by
- AC 230 V on and off at specified time intervals. The timer can be switched on and off up to 48 times a day.
- Voltage 230 V, 50 Hz
- Maximum load 16 A, 3600 W
- Operating temperature -10°C to +40°C
- Clock accuracy +/- 5 min
- Accuracy for 30 min. +/- 5 seconds
- Accuracy for 1 hour +/- 10 seconds
- Accuracy for 6 hours +/- 1 min

SPS 15
USB CHARGER

- Universal switching power supply unit 1500 mAh, stabilised
- Complies the newest ECO - EU directives
- Low energy consumption in standby mode
- Short-circuit protected
- Automatic overload and overheat protection
- Reversible polarity
- Output Current: max. 600 mA
- Output Voltages: 3/ 4.5/ 5/ 6/ 7.5/ 9/ 12 V
- Input: 100 - 240 V, 50/60 Hz
- 7 adapter plugs included:
- 2 jack plugs: 2.5 and 3.5 mm
- 4 DC plugs: 1.35 x 3.5/2.1 x 5.0/1.5 x 5.5/2.5 x 5.5 mm
- 1 Micro HDMI connector
- Red LED for checking function

SPS 10
USB CHARGER

- Universal switching power supply unit 1000 mAh, stabilised
- Complies the newest ECO - EU directives
- Low energy consumption in standby mode
- Short-circuit protected
- Automatic overload and overheat protection
- Reversible polarity
- Output Current: max. 600 mA
- Output Voltages: 3/ 4.5/ 5/ 6/ 7.5/ 9/ 12 V
- Input: 100 - 240 V, 50/60 Hz
- adapter plugs included:
- 2 jack plugs: 2.5 and 3.5 mm
- 4 DC plugs: 1.35 x 3.5/2.1 x 5.0/1.5 x 5.5/2.5 x 5.5 mm
- 1 Micro HDMI connector
- Red LED for checking function

SPS 6
USB CHARGER

- Universal switching power supply unit 600 mAh, stabilised
- Complies the newest ECO - EU directives
- Low energy consumption in standby mode
- Short-circuit protected
- Automatic overload and overheat protection
- Reversible polarity
- Output Current: max. 600 mA
- Output Voltages: 3/ 4.5/ 5/ 6/ 7.5/ 9/ 12 V
- Input: 100 - 240 V, 50/60 Hz
- 7 adapter plugs included:
- 2x jack plugs: 2.5 and 3.5 mm
- 4x DC plugs: 1.35 x 3.5/2.1 x 5.0/1.5 x 5.5/2.5 x 5.5 mm
- 1x Micro HDMI connector
- Red LED for checking function

SCH 630
USB CHARGER

- Charger with 2 x USB
- Output DC 5 V/3,1 A (max 15,5 W)
- Suitable for Charging Tablets, MP3 Players, Mobile Phones, Navigation, etc.
- Power: AC 230V , 0,6A, 50Hz
- Dimensions: 47 x 31 x 80 mm
- Weight: 50 g

● SPC 70 BK
○ SPC 70 WH

SOCKET

- Socket + 2x USB
- 16 A/250 V – 50MHz: Max.: 3680 W
- USB outpu: DC 5V: max.: 2,1 A

8 km

SMR 600
MOBILE RADIO

- Set of Two Personal Mobile Radio Transceivers
- Up to 8 km Open Field Range
- 8 Channels with 38 CTCSS Codes
- 83 DCS Codes for More Private Communication
- Rotary ON/OFF and Volume Control
- Auto Channel Scan
- 15 Selectable Call Ring Tones
- VOX Function
- Channel Monitor
- Dual Channel Watch Function
- Automatic Squelch
- Automatic Battery Save
- Roger Beep ON/OFF
- Key Lock ON/OFF
- Key Tone ON/OFF
- Large Backlight Display
- Battery Meter with Low Warning
- MIC/EAR/Charge Jack

7 km

SMR 130
MOBILE RADIO

- Up to 7 km Open Field Range
- 8 Channels
- Adjustable Volume Control
- Auto Channel Scan
- Call Ring Tone
- Channel Monitor
- Automatic Squelch
- Automatic Battery Save
- Roger Beep
- Key Lock ON/OFF
- Display Backlight
- Battery Meter with Low Warning
- Removable Belt Clip
- Hands free and charger jack (optional)
- Power 3x AAA Batteries (not included)

10 km

SMR 111
MOBILE RADIO

- Personal Mobile Radio Twin Set
- Up to 5 km Open Field Range
- 8 Channels with 38 CTCSS Codes
- Carrier Frequesncy 446 MHz
- 0,5 W Transmission Power
- Channel Scan
- 10 Call Ring Tones
- VOX Function
- Channel Monitor
- Automatic Squelch
- Roger Beep ON/OFF
- Key Tone ON/OFF
- Key Lock Function
- Lamp
- Backlight Display
- Battery Saving Function
- Battery Meter with Low Warning
- Power 3 x AAA Alkaline Battery (not included)
- Content
- 2 PMR handset

SLL 88
LIGHT

- Quality rechargeable hand-held rubber flashlight with a 3-watt high power LED that provides a very strong light beam and a long lifetime. A practical robust clip makes it easy to attach. The built-in 3.7V, 2200mAh Li-ion battery ensures a long operating time and is easily charged using a wall power adapter or a 12V DC car power adapter.
- RUBBER LINED LAMP SLL 88
- Material: plastic, rubber
- Function: 100% / 50% / OFF
- Power source: 3,7 V
- Type of battery: Li-ion 2200 mAh
- Luminous flux: 100 lm
- Light duration: 4 h (100%) / 12 h (50%)

SLL 84
LIGHT

- Rubber covered flashlight
- 3 WATT COB
- Material: ABS, rubber
- Function: ON / OFF
- Power: 4.5 V
- Battery type: 3 x AA
- Luminous flux: 120 lm
- Burn time: 7 hours
- Afterglow: 4 m
- Resistance: IP 20
- Weight: 109 g
- Dimensions: 210 x 58.5 x 30.3 mm

SLL 83
LIGHT

- 3 W - high-bright LEDs
- Material: plastic / rubber
- Function: ON / OFF
- Afterglow: 200 m
- Luminous flux: 220 lm
- Power supply: 6 V, 4 x D
- Burn time: 20 hours
- Weight: 526 g
- Dimensions: 200 x 125 x 125 mm

SLL 19
LIGHT

- Practical and compact hand-held flashlight with 3W COB and 1W LED in the front. At the same time it has on its side 5 red LEDs, which serve as a warning light. An interesting addition is the magnet on the front.
- RUBBERIZED FLASHLIGHT
- Material: ABS, rubber
- Function: ON 1 W LED / ON 3 W COB / ON red flashing light / OFF
- Power supply: 4.5 V
- Battery type: 2 x AAA
- Luminous flux: 10 lm - LED / 120 lm - COB
- Lighting time: 4 h - 1W LED / 3 h - 3W COB

SLL 18
LIGHT

- Practical torch in hand that grips the slide contains a novelty among LED chips called COB characterized by very high luminosity
- COB chip is switched by sliding the top of the lamp
- This part of the lamp has a flexible joint with the possibility of tilting by 90 °
- Magnet on the bottom
- LANTERN rubberized
- Material: ABS, rubber
- Functions: 1 LED / Eject COB ON / OFF
- Power: 4.5 V
- Battery Type: 3 x AAA
- Luminous flux: 10 lm - LED / 120 lm - COB

SLL 65
LIGHT

- Light aluminium lamp resistant against dust and dampness. 3 watt LED diode guaranteeing a very strong light beam and a long lifespam. This lamp is the ideal helper for home and outdoor use under any weather conditions.
- 3 WATT Metal flashlight
- Material: aluminium
- Function: ON / OFF
- Power source: 1.5 V
- Type of battery: 1 x AA
- Luminous flux: 50 lm
- Light duration: 5 h
- Range: 80 m
- Protection class: IP 52

SLL 64
LIGHT

- Light aluminium flashlight, resistant against dust and dampness. LED diode guaranteeing a sufficient light beam and a long lifetime. This lamp is the ideal helper for home and outdoor use under any weather conditions.
- METAL ALLOY 0,5 WATT
- Material: aluminium
- Function: ON / OFF
- Power source: 1.5 V
- Type of battery: 1x AA
- Luminous flux: 20 lm
- Light duration: 10 h
- Range: 20 m

SLL 90
LIGHT

- The compact set of rubberized flashlights on the wheel
- These front and rear lights on your bike are ideal assistant in case you need a small, practical and easily odnimatelé light primarily on the bike
- Both lights have 2 LEDs, front white light and a rear red that great serve
- Moreover, both are flashing function
- Material: plastic, silicone
- Features: FULL / FLASH / OFF
- Power supply: 6 V
- Battery Type: 2 x CR2025 (included)
- The luminous flux of 5 lm
- Burn time: 8 hours

SLL 61
LIGHT

- Practical alluminium camping lamp with 16 highly luminous 5mm LED diodes
- Hanging ring for universal usage
- Ideal for garden, hiking or when blackout appears
- 16 highly luminous 5mm LED diodes
- Afterglow: 15 m
- Luminous flux: 56 lm
- Power supply: 4.5V, 3x AAA (R03)
- Lightening duration (continuous): with LR6 - 10 h

SLL 60
LIGHT

- Stylish compact table lamp with 12 highly luminous LED diodes
- Flexible metal neck provides excellent handling
- Ideal for efficient lighting everywhere we cannot or do not want to use the power of the network
- 12 highly luminous LED diodes
- Afterglow: 15 m
- Luminous flux: 48 lm
- Power consumption: 4.5V, 3x AAA (R03)
- Diode lifetime : up to 100 000 h
- Lightening duration (continuous): with LR03 - 15 h

SLL 58
LIGHT

- Lightweight and compact headlamp with a super luminous 3W COB LED diode.
- The headlamp is fitted with a magnet, meaning it can be easily attached to all metal surfaces.
- Thanks to a retractable cord, it is very storable and practical for all occasions.
- Lighting modes: 50%, 100% and warning flash.
- HEAD TORCH 3 WATTS
- LED: COB
- Material: ABS
- Function: FULL / SEMI / FLASH / OFF
- Power source: 4.5 V

SLL 56
LIGHT

- Top of the line head lamp with a super high-power 3W Q3 CREE LED diode. The body is made from aluminium and durable plastic. Handling is made easier by an adjustable joint and an adaptable head strap. Thanks to its very low weight, it is ideal for professional and sports activities. 3 lighting modes, 50%, 100% and warning flash.•
- HEAD TORCH 3 WATTS
- LED: Q3
- Material: aluminium / plastic
- Function: beam width control
- Function: FULL / SEMI / FLASH / OFF
- Simultaneous rear safety light
- Power source: 4.5 V

SLL 55 WHITE
SLL 55 GREY
LIGHT

- A stylish all-round head lamp with a single high-performance 3-watt diode and two red LED diodes for lighting up the night. Thanks to its very low weight and compact dimensions, it is ideal for professional and sports activities.
- The body is made from durable plastic.
- 4 lighting modes: 100% power 3W LED, 30% power 3W LED, 100% 2x red LEDs, warning light (3W + 2x red LEDs)
- 3 WATT HEADLAMP
- LED: CREE XPE Q3

SLL 53
LIGHT

- Professional head torch with 3 W super luminous CREE LED diode
- Body made from alluminium and durable plastics
- Easy manipulation with adjustable joint and head strap
- Ideal for profesional usage and sport activities
- 3 lightning modes, 50%, 100% and warning light
- 3W highly luminous CREE LED diode - 3 lightning modes
- Luminous flux: 160 lm
- Power supply: 4.5V, 3× AAA (R03)
- Lightening duration (continuous): with LR03 - 3 h
- Protection: IP×2

SLL 50
LIGHT

- Head torch with 8 highly luminousi LED diodes
- The body is made of lightweight and durable plastic
- Handling facilitates adjustable joint with lock and adjustable head strap
- Ideal for lighting for short distances without using your hands
- 3 intensities of lightening 2 LED, 4 LED and full shine 8 LED
- 8 lighly luminous LED diodes - 3 modes of lightening
- Resistant to moisture, impact and dust
- Afterglow: 15 m
- Luminous flux: 32 lm
- Power supply: 4.5V, 3x AAA (R03)
- Diode lifetime : up to 100 000 h
- Lightening duration (continuous): with LR03 - 20 h

SLL 16
LIGHT

- MULTI-PURPOSE LIGHT LED 16 + 5 LED Material: ABS
- Function: ON - 16xLED / ON - 5xLED / OFF
- Power: 4.5 V
- Battery Type: 3 x AAA
- Luminous flux: 60 lm-16 LED / 10 lm - 5 LED
- Burn time: 15 h - 16 LED / 20 h - 5 LED
- Afterglow: 4 m - 16 LED / 3m - 5 LED
- Weight: 58 g
- Dimensions: 56 x 27 x 105 mm

SLL 43
LIGHT

- Top professional flashlight with beam width regulation
- Whole alluminium body, luminous flux regulation and SOS mode are ideal features for outdoor activities
- Super luminuous CREE LED 3W diode with 160 lm luminous flux and diode lifetime of 50 000h ensures extremely strong streamer
- LED: CREE XP-E R3
- Function: beam width regulation
- Function: FULL / SEMI / SOS / OFF
- Material: Alluminium
- Afterglow: 150 m
- Luminous flux: 160 lm
- Power supply: 4.5V, 3× AAA (R03)

SLL 47
LIGHT

- Top of the line and outstanding flashlight has an extremely strong luminous flux of approximately 500 lumens and a range of 500 meters, thanks to a high-performance Cree XM-L2 T6 LED diode.
- The all-aluminium body and adjustable luminous flux option are ideal features for outdoor activities. This flashlight offers 2 intensity modes of 30% and 100%.
- 10 W - High-bright CREE LED
- LED: CREE XML T6
- Functions: Control the width of the beam
- Features: FULL / SEMI / OFF
- Material: Aluminum
- Beam distance: 500 m
- Luminous flux: 600 lm

SLL 30
LIGHT

- Quality aluminium water and dust resistant flashlight
- 1 W highly luminous LED diode provides a very powerful beam of light and long life
- This flashlight is an ideal tool for use at home and outdoors in all weather conditions
- 1 W - high-luminance LED diode
- Resistant to moisture, impact and dust
- Afterglow: 50 m
- Luminous flux: 70 lm
- Power supply: 4.5V, 3x AAA (R03)
- Diode lifetime : up to 100 000 h
- Lightening duration (continuous): with LR03 - 4 h

SLL 20
LIGHT

- Quality aluminium water and dust resistant flashlight
- 16 powerful LED diodes covered by protective glass provides a very powerful beam of light and long life
- This flashlight is an ideal tool for use at home and outdoors in all weather conditions
- 16 high-luminance LED diodes
- Resistant to moisture, impact and dust
- Afterglow: 40 m
- Luminous flux: 64 lm
- Power supply: 4.5V, 3x AAA (R03)
- Diode longlife: up to 100 000 h
- Lightening duration (continuous): with LR03 - 10 h

SLL 31
LIGHT

- Quality aluminum flashlight
- 3 W highly luminous CREE LED diode provides a very powerful beam of light and long life
- This flashlight is an ideal tool for use at home and outdoors in all weather conditions
- Suitable also with bike mount SLL 70
- 3W - high-luminance CREE LED diode
- LED: CREE XP-E R3
- Material: Aluminium
- Afterglow: 150 m
- Luminous flux: 160 lm
- Power supply: 4,5 V, 3x AAA (R03)

SLL 12
LIGHT

- Quality water and dust resistant rubberised flashlight with 3 powerful LED diodes, which ensure a strong beam of light and long life
- This flashlight is an ideal tool for use at home and outdoors in all weather conditions
- 3 high-luminance LED diodes
- Resistant to moisture and dust
- Afterglow: 10 m
- Luminoux flux: 15 m
- Power supply: 4.5V, 3 x D (R20)
- Diode lifetime : up to100 000 h
- Lightening duration (continuous): with LR20 - 90 h.

SLL 11
LIGHT

- Quality water and dust resistant rubberised flashlight with 3 powerful LED diodes, which ensure a strong beam of light and long life
- This flashlight is an ideal tool for use at home and outdoors in all weather conditions
- 3 high-luminance LED diodes
- Resistant to moisture and dust
- Afterglow: 15 m
- Luminous flux: 15 m
- Power supply: 3 V, 2 x D (R20)
- Diode lifetime : up to 100 000 h
- Lightening duration (continuous): with LR20 - 60 h.

SLL 10 Green
SLL 10 Pink
SLL 10 Blue
LIGHT

- Quality water and dust resistant rubberised flashlight with 3 powerful LED diodes, which ensure a strong beam of light and long life
- This flashlight is an ideal tool for use at home and outdoors in all weather conditions
- 3 high-luminance LED diodes
- Resistant to moisture and dust
- Afterglow: 10 m
- Luminous flux: 15 lm

SCL 2200
CLEANING AGENT

- 4 in 1 – Cleaning cloth + antistatic brush + cleaning solution (60ml) + textile bag for easy storage
- Cleaning microfibre cloth 20x20 cm perfectly removes grease and dust.
- Cleaning solution immediately removes smears, fingerprints and dust - 60ml.
- Soft cleaning brush simply removes dust and smears from the monitor, keyboard without scratching the surface.
- Appropriate for: CD/DVD discs, LCD/Plasma TV, CRT TV, PDA/MDA displays, notebooks,cameras, etc..
- Package contains: Cleaning solution (200ml)+ microfibre cloth + cleaning brush + textile bag

SCL 2100
CLEANING AGENT

- 3 in 1 - Cleaning solution (200ml) + micro fibre cloth + cleaning brush
- Cleaning solution immediately removes smears, fingerprints and dust - 200ml.
- Soft cleaning brush simply removes dust and smears from the monitor, keyboard without scratching the surface.
- Cleaning microfibre cloth 30x30 cm perfectly removes grease and dust.
- Appropriate for: CD/DVD discs, LCD/Plasma TV, CRT TV, PDA/MDA displays, notebooks,cameras, etc...
- Package contains: Cleaning solution (200ml) + microfibre cloth + cleaning brush

SCL 2000
CLEANING AGENT

- 2 in 1 – Cleaning solution (100ml) + microfibre cloth 18x11 cm
- Cleaning solution (100ml) + microfibre cloth 18x11 cm
- Cleaning solution immediately removes smears, fingerprints and dust - 100ml.
- Appropriate for: CD/DVD discs, LCD/Plasma TV, PDA/MDA displays, notebooks, cameras, glasses , etc....
- Package contains: Cleaning solution (100ml) + microfibre cloth

SCL 1100
CLEANING AGENT

- Microfiber cleaning cloth 20x20cm.
- Easy removes fingerprints and does not leave any smears.
- High cleaning effect without need of using liquid sodium.
- Appropriate for: CD/DVD discs, LCD/Plasma TV, PDA/MDA displays, notebooks, cameras, glasses, etc....
- Package contains: cleaning cloth

SSP 850
SURGE PROTECTOR

- 8x socket
- Overall absorption: 1836 Joules
- 16 A / 250 V (max.2300 W / 230 V)
- EMI and RFI noise filter
- Protection of coax. cable (IEC)
- Protection for telephone and network cable (RJ11 / RJ45)
- Child safety
- 1.5 m

SSP 560
SURGE PROTECTOR

- 5x socket
- Overall absorption: 306 Joules
- 16 A / 250 V (max.3680 W / 230 V)
- USB Charger (5 V / 2.1 A max.)
- Child safety
- 1.5 m

SSP 530
SURGE PROTECTOR

- 5x socket
- Overall absorption: 918 Joules
- 16 A / 250 V (max.2300 W / 230 V)
- EMI and RFI noise filter
- Protection of coax. cable (IEC)
- Child safety
- 1.5 m

SSP 140
SURGE PROTECTOR

- 1x socket
- Overall absorption: 306 Joules
- 16A / 250 V (max.3680 W / 230 V)
- USB Charger (5 V / 2.1 A max.)
- Child safety

SSP 110
SURGE PROTECTOR

- 1x socket
- Overall absorption: 918 Joules
- 16A / 250 V (max.3680 W / 230 V)
- EMI and RFI noise filter
- Protection of coax. cable (IEC)
- Child safety

SGM 21

GAME

- Tetris electronic game pad
- 16 in 1 games
- "magic diamond
- fill blank shooting
- intelligent plate
- invander
- clever frog
- smart cargator
- shooter
- greedy snake
- tetris
- running tetris
- black and white inversion tetris
- heighten tetris
- tetris combinations"
- durable plastic keys
- large easy to read display
- pause key
- score count
- multiple level
- multiple speed
- sound level adjustable
- save pover function
- power : 2 x aa battery
- dimmensions: 176x75x18 mm

POWER EXTENSION

	MODEL	LENGTH	NUMBER OF OUTLETS	SWITCH	SAP	EAN
	SPC 1	1,5 m	3	×	35030701	8590669089505
	SPC 2	2 m	3	×	35030702	8590669089512
	SPC 3	3 m	3	×	35030703	8590669089529
	SPC 4	5 m	3	×	35030704	8590669089536
	SPC 5	7 m	3	×	35030705	8590669089543
	SPC 6	1,5 m	4	×	35030706	8590669089550
	SPC 7	2 m	4	×	35030707	8590669089567
	SPC 8	3 m	4	×	35030708	8590669089574
	SPC 9	5 m	4	×	35030709	8590669089581
	SPC 10	7 m	4	×	35030710	8590669089598
	SPC 11	1,5 m	5	×	35030711	8590669089604
	SPC 12	2 m	5	×	35030712	8590669089611
	SPC 13	3 m	5	×	35030713	8590669089628
	SPC 14	5 m	5	×	35030714	8590669089635
	SPC 15	2 m	6	×	35030715	8590669089642
	SPC 16	3 m	6	×	35030716	8590669089659
	SPC 17	5 m	6	×	35030717	8590669089666
	SPC 18	1,5 m	3	•	35030718	8590669089673
	SPC 19	2 m	3	•	35030719	8590669089680
	SPC 20	3 m	3	•	35030720	8590669089697
	SPC 21	5 m	3	•	35030721	8590669089703
	SPC 22	7 m	3	•	35030722	8590669089710
	SPC 23	1,5 m	4	•	35030723	8590669089727
	SPC 24	2 m	4	•	35030724	8590669089734
	SPC 25	3 m	4	•	35030725	8590669089741
	SPC 26	5 m	4	•	35030726	8590669089758
	SPC 27	7 m	4	•	35030727	8590669089765
	SPC 28	1,5 m	5	•	35030728	8590669089772
	SPC 29	2 m	5	•	35030729	8590669089789
	SPC 30	3 m	5	•	35030730	8590669089796
	SPC 31	5 m	5	•	35030731	8590669089802
	SPC 32	2 m	6	•	35030732	8590669089819
	SPC 33	3 m	6	•	35030733	8590669089826
	SPC 34	5 m	6	•	35030734	8590669089833
	SPC 36	1,5 m	7	•	50001244	8590669138968
	SPC 37	3 m	6	•	50001245	8590669138975

Diameter wires at all power extension cords is 3 × 1 mm.

IN MANY VERSIONS

MODEL	LENGTH	NUMBER OF OUTLETS	SWITCH	SAP	EAN
SPC 1B	1,5 m	3	×	50001988	8590669192397
SPC 3B	3 m	3	×	50001989	8590669198375
SPC 18B	1,5 m	3	ano	50001990	8590669192403
SPC 20B	3 m	3	ano	50002221	8590669192373
SPC 21B	5 m	3	ano	50002222	8590669192380

MODEL	LENGTH	NUMBER OF OUTLETS	WIRE DIAMETERS	SAP	EAN
SPC 40	1,5 m	1	1 mm	35033595	8590669094783
SPC 41	2 m	1	1 mm	35033596	8590669094790
SPC 42	3 m	1	1 mm	35033597	8590669094806
SPC 43	5 m	1	1 mm	35033598	8590669094813
SPC 44	7 m	1	1 mm	35033599	8590669094820
SPC 45	10 m	1	1 mm	35033600	8590669094837
SPC 46	20 m	1	1,5 mm	35033611	8590669094844
SPC 47	30 m	1	1,5 mm	35033612	8590669094851
SPC 50	25 m	4	1,5 mm	35033613	8590669094868
SPC 51	50 m	4	1,5 mm	35033614	8590669094875
SPC 52	25 m	1	1,5 mm	35042761	8590669132782
SPC 53	50 m	1	1,5 mm	35042762	8590669132799
SPC 60	×	3	×	35033615	8590669094882
SPC 61	×	4	×	35033616	8590669094899
SPC 62	×	3	×	35033617	8590669094905
SPC 63	×	3	×	35033618	8590669094912
SPC 64	×	×	×	35033619	8590669094929
SPC 65	×	×	×	35033620	8590669094936



SENCOR®

premium gold cables

SAV 199-008
SAV 199-015
SAV 199-025
SAV 199-050
SAV 199-100

- 35040928 (0,8 m)
- 35040929 (1,5 m)
- 35040930 (2,5 m)
- 35040931 (5 m)
- 35040932 (10 m)
- package: blister
- antenna coaxial cable, M 9,5 mm/F 9,5 mm, fully shielded, gold 24K, ferrie cores

SAV 165-015
SAV 165-025
SAV 165-050

- 35033621 (1,5 m)
- 35039900 (2,5 m)
- 35039911 (5 m)
- package: blister
- HDMI 19pin, plug/M – plug/M, gold, V1.4

SAV 167-015W
SAV 167-025W

- 35042685 (1,5m)
- 35042686 (2,5m)
- package: blister
- HDMI 19pin, plug/M - plug/M, gold, V1.4, white color

SAV 173-015

- 35043755 (1,5m)
- package: blister
- HDMI A/M - D/M (micro), V1.4

SAV 174-015

- 35040933
- lenght: 1,5 m
- package: blister
- HDMI A/M - C/M mini V1.4

SAV 176-015

- 35040935
- lenght: 1,5 m
- package: blister
- HDMI A/M - A/M 90° V1.4

SAV 177-015

- 35040936
- lenght: 1,5 m
- package: blister
- HDMI A/M - A/M FLAT V1.4

SAV 178-015

- 35042159
- lenght: 1,5 m
- package: blister
- HDMI 19pin
- plug A/M - A/M, gold plated, flat cable, plugs - 360°, V1.4

premium cables

MODEL	SAP	LENGTH	PACKAGE	CATEGORY/DESCRIPTION
SAV 115-008	35020207	0,8 m	blister	Optical fiber cable, Toslink plug – gold plated, ø 5 mm
SAV 115-015	35020208	1,5 m	blister	Optical fiber cable, Toslink plug – gold plated, ø 5 mm
SAV 166-015	35039913	1,5 m	blister	HDMI 19pin, plug A/M - plug A/M, gold plated, V1.4
SAV 166-025	35039914	2,5 m	blister	HDMI 19pin, plug A/M - plug A/M, gold plated, V1.4
SAV 166-050	35039915	5,0 m	blister	HDMI 19pin, plug A/M - plug A/M, gold plated, V1.4
SAV 113-008	35020201	0,8 m	blister	SCART plug – SCART plug, 21-pin., composite cable, shield
SAV 113-015	35020202	1,5 m	blister	SCART plug – SCART plug, 21-pin., composite cable, shield
SAV 113-025	35020203	2,5 m	blister	SCART plug – SCART plug, 21-pin., composite cable, shield
SAV 113-050	35020204	5,0 m	blister	SCART plug – SCART plug, 21-pin., composite cable, shield
SAV 163 015	35029272	1,5 m	blister	SCART plug – 3 × cinch/RCA plugs, with switch
SAV 151-000	35024317		tag	SCART /M – 3RCA /M + S-video, with switch
SAV 134-000	35020228		tag	SCART plug – 3× SCART jack, miniature size, 98×56×24 mm
SAV 120-000	35020213		tag	Cinch/RCA plug – Cinch/RCA plug
SAV 102-008	35020165	0,8 m	tag	2× cinch/RCA plugs – 2× cinch/RCA plug
SAV 102-015	35020166	1,5 m	tag	2× cinch/RCA plugs – 2× cinch/RCA plug
SAV 102-025	35020167	2,5 m	tag	2× cinch/RCA plugs – 2× cinch/RCA plug
SAV 107-015	35020178	1,5 m	tag	3× cinch/RCA plugs – 3× cinch/RCA plug
SAV 117-000	35020210		tag	6,35 mm stereo jack – 3,5 mm stereo jack
SAV 121-000	35020215		tag	3,5 mm stereo jack – 2 × 3,5 mm stereo jacks
SAV 149-000	35022803		tag	Adapter 2,5mm stereo jack/M – 3,5mm stereo jack /F
SAV 118-000	35020211		tag	3,5 mm stereo jack – 2×cinch/RCA socket
SAV 104-020	35020171	2,0 m	tag	3,5 mm stereo jack – 2×cinch/RCA plug
SAV 104-050	35020172	5,0 m	tag	3,5 mm stereo jack – 2×cinch/RCA plug
SAV 105-008	35020173	0,8 m	tag	3,5 mm stereo jack – 3,5 mm stereo jack
SAV 105-015	35020174	3 m	tag	3,5 mm stereo jack – 3,5 mm stereo jack
SAV 105-030	35040926	1,5 m	tag	3,5 mm stereo jack – 3,5 mm stereo jack
SAV 106-025	35020175	2,5 m	tag	3,5 mm stereo jack – 3,5 mm stereo jack
SAV 106-050	35020176	5,0 m	tag	3,5 mm stereo jack – 3,5 mm stereo jack
SAV 2075-100	35042684	100 m	spool	Speaker cable 2 × 0,75 mm²
SCO 560-010	45010199	1,0 m	plastic bag	Patch kabel UTP RJ45- RJ45 CAT5e
SCO 560-020	45010207	2,0 m	plastic bag	Patch kabel UTP RJ45- RJ45 CAT5e
SCO 560-030	45010201	3,0 m	plastic bag	Patch kabel UTP RJ45- RJ45 CAT5e
SCO 560-050	45010202	5,0 m	plastic bag	Patch kabel UTP RJ45- RJ45 CAT5e
SCO 560-075	45010203	7,5 m	plastic bag	Patch kabel UTP RJ45- RJ45 CAT5e
SCO 560-100	45010204	10 m	plastic bag	Patch kabel UTP RJ45- RJ45 CAT5e
SCO 560-150	45010205	15 m	plastic bag	Patch kabel UTP RJ45- RJ45 CAT5e
SCO 560-200	45010206	20 m	plastic bag	Patch kabel UTP RJ45- RJ45 CAT5e

SENCOR®

USB cables

SCO 512-010 BLUE
- 45010994
- USB A/M-Micro B

SCO 512-010 GREEN
- 45010993
- USB A/M-Micro

SCO 512-010 PINK
- 45010995
- USB A/M-Micro B

SCO 512-010 WHITE
- 45010992
- USB A/M-Micro B

1 m

SCO 522-015 BK
- 45013053
- USB A/M-Micro B/C

SCO 522-015 WH
- 45013054
- USB A/M-Micro B/C

1,5 m

SCO 520-015 BK
- 45013051
- USB 3.1 A/M-C

SCO 520-015 WH
- 45013052
- USB 3.1 A/M-C

1,5 m

premium cables

MODEL	SAP	LENGTH	PACKAGE	CATEGORY/DESCRIPTION
SAV 109-008B	35020181	0,8 m	tag	Antenna coaxial cable, fully shielded, plug - socket
SAV 109-008W	35020182	0,8 m	tag	Antenna coaxial cable, fully shielded, plug - socket
SAV 109-015B	35020183	1,5 m	tag	Antenna coaxial cable, fully shielded, plug - socket
SAV 109-015W	35020184	1,5 m	tag	Antenna coaxial cable, fully shielded, plug - socket
SAV 109-025B	35020185	2,5 m	tag	Antenna coaxial cable, fully shielded, plug - socket
SAV 109-025W	35020186	2,5 m	tag	Antenna coaxial cable, fully shielded, plug - socket
SAV 109-050B	35020187	5,0 m	tag	Antenna coaxial cable, fully shielded, plug - socket
SAV 109-050W	35020188	5,0 m	tag	Antenna coaxial cable, fully shielded, plug - socket
SAV 109-075B	35020189	7,5 m	tag	Antenna coaxial cable, fully shielded, plug - socket
SAV 109-075W	35020190	7,5 m	tag	Antenna coaxial cable, fully shielded, plug - socket
SAV 109-100B	35020191	10,0 m	tag	Antenna coaxial cable, fully shielded, plug - socket
SAV 109-100W	35020192	10,0 m	tag	Antenna coaxial cable, fully shielded, plug - socket
SAV 109-150B	35039658	15,0 m	tag	Antenna coaxial cable, fully shielded, plug - socket
SAV 109-150W	35039659	15,0 m	tag	Antenna coaxial cable, fully shielded, plug - socket
SAV 169-008W	35039660	0,8 m	tag	Antenna coaxial cable, fully shielded, plug - socket 90°
SAV 169-015W	35039751	1,5 m	tag	Antenna coaxial cable, fully shielded, plug - socket 90°
SAV 169-025W	35039752	2,5 m	tag	Antenna coaxial cable, fully shielded, plug - socket 90°
SAV 169-050W	35039753	5,0 m	tag	Antenna coaxial cable, fully shielded, plug - socket 90°
SAV 169-075W	35039754	7,5 m	tag	Antenna coaxial cable, fully shielded, plug - socket 90°
SAV 169-100W	35039755	10,0 m	tag	Antenna coaxial cable, fully shielded, plug - socket 90°
SAV 169-150W	35039756	15,0 m	tag	Antenna coaxial cable, fully shielded, plug - socket 90°
SAV 124-000	35020218		tag	TV Coaxial adaptor 1x M - 2x F, nickel
SAV 125-000	35020219		tag	TV Coaxial adaptor 2x M - 1x F, nickel
SAV 126-000	35020220		tag	TV coaxial connector - Male, white PVC, nickel
SAV 127-000	35020221		tag	TV coaxial connector - Female, white PVC, nickel
SAV 128-000	35020222		tag	TV coaxial connector - Female, white PVC, nickel
SAV 129-000	35020223		tag	TV coaxial connector - Male, white PVC, nickel
SAV 132-000	35020226		tag	F-type screw connetor, nickel
SAV 6059-100	35043254	100 m	box	Coax cable RG-59 Cu, OD: 6,0mm, 75 Ohm, 100m
SAV 6906-100	35043253	100 m	box	Coax cable RG-6 Cu, OD: 6,9mm, 75 Ohm, 100m
SCO 501-015	35020252	1,5 m	tag	USB cable – USB 2.0 A cable – USB Mini 5-pin.
SCO 509-015	35029276	1,5 m	tag	USB cable – USB 2.0 A connector – USB 2.0 A connector, connecting cable
SCO 510-015	35029277	1,5 m	tag	USB cable – USB 2.0 A connector – USB 2.0 A connector, prolongation cable
SCO 511-015	35029278	1,5 m	tag	USB cable – USB 2.0 A connector – USB 2.0 B connector, suitable for printer, external HDD
SCO 511-030	35039757	3,0 m	tag	USB cable – USB 2.0 A connector – USB 2.0 B connector, suitable for printer, external HDD
SCO 512-002	45009402	0,2 m	tag	USB cable – USB 2.0 A connector – USB 2.0 B Micro connector
SCO 512-008	45009403	0,8 m	tag	USB cable – USB 2.0 A connector – USB 2.0 B Micro connector
SCO 512-015	35039758	1,5 m	tag	USB cable – USB 2.0 A connector – USB 2.0 B Micro connector
SCO 513-001	35042687	15 cm	tag	USB cable - USB 2.0 A/F connector - USB 2.0 Micro B/M ,OTG
SCO 530-015	35039759	1,5 m	tag	USB cable – USB 3.0 A connector – USB 3.0 A conector
SCO 531-015	35039760	1,5 m	tag	USB cable – USB 3.0 A connector – USB 3.0 B connector, suitable for printer, external HDD
SCO 531-030	35039761	3,0 m	tag	USB cable – USB 3.0 A connector – USB 3.0 B connector, suitable for printer, external HDD
SCO 532-015	35039762	1,5 m	tag	USB cable – USB 3.0 A connector – USB 3.0 B micro conector
SCO 505-015	35039912	1,5 m	tag	VGA/SVGA cable, 15p M – 15p M, ø 8 mm, 2 ferits
SCO 505-030	35025501	3,0 m	tag	VGA/SVGA cable, 15p M – 15p M, ø 8 mm, 2 ferits
SCO 505-050	35025502	5,0 m	tag	VGA/SVGA cable, 15p M – 15p M, ø 8 mm, 2 ferits

SENCOR

FAST ČR a. s., Černokostelecká 1621, 251 01 Říčany, Czech Republic
www.sencor.eu