SENCOR

AUTUMN 2022

CONSUMER ELECTRONICS

TABLE OF CONTENTS

CONSUMER ELECTRONICS

Televisions

3 WEBOS
4 SMART TVS
6 FULL HD
7 HD READY

TV accessories

10 ANDROID TV BOX
11 SET TOP BOX
12 CONTROLLERS
13 ANTENNAS

Home multimedia

16 TABLE DVDS
17 PORTABLE TVS
18 PORTABLE DVDS

Audio

20 PARTY SPEAKERS
23 WIRELESS SPEAKERS
27 MICROSYSTEMS
29 TURNTABLES
30 INTERNET RADIOS
31 CD PLAYERS
34 PORTABLE RADIOS
40 RADIO ALARM CLOCKS
42 MP3 PLAYERS
43 EARPHONES/HEADPHONES

Home

48 WEATHER STATIONS
58 THERMOMETER
60 DIGITAL CLOCKS
63 WIRELESS DOORBELLS
64 DIGITAL PHOTO FRAMES

Car accessories

68 CAR CAMERAS
69 CAR RADIOS
71 SUBWOOFERS
72 SPEAKERS
73 PARKING SYSTEMS
74 CAR CHARGERS
76 ALCOHOL TESTERS
78 FM MODULATORS

Office

81 SHREDDERS
82 TRIMMERS
83 LAMINATORS

Others

86 SCOOTER
89 MOBILE PHONES
90 ACTION CAMERAS
92 TIMERS
93 MOBILE RADIOS
94 LIGHTS
95 GAMES

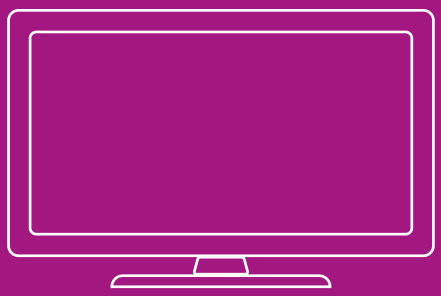

Televisions

3 WebOS
4 SMART TVS
6 FULL HD
7 HD READY

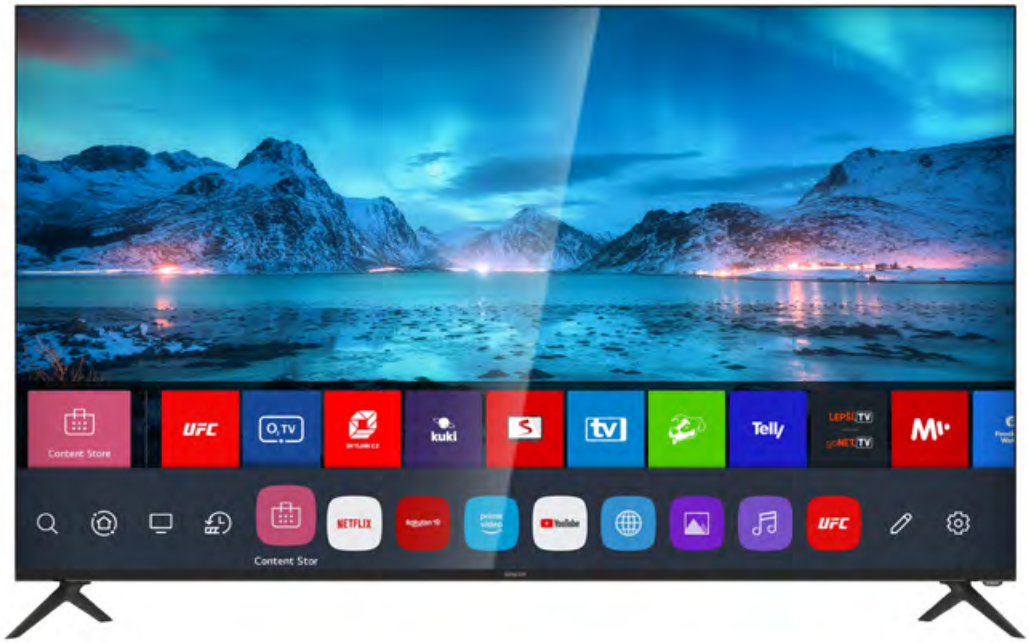

webOS TV ThinQ AI® Magic Remote™ HbbTV

NETFLIX YouTube HBOmax O2 TV

webOS SMART TV 5.0
SMART TV

- AI ThinQ - voice assistant
- Magic Remote included (applies to UHD models)
- DVB-T/T2/C/S/S2 tuners

Picture:
- HDR 10–1.07 billion colours
- D-LED
- Response time 8 ms
- Wide viewing angles 178°/178°
- Digital Comb Filter (DCF)
- Dynamic Noise Reduction (DNR)
- Adaptive deinterlacing (DMDI)

Chipset and memory:
- CPU: ARM Cortex A55 Quad Core
- GPU: Mali G31
- ROM: 1.5GB
- RAM: 8GB

SMART interface:
- webOS SMART TV 5.0 interface
- Netflix, Prime Video, Youtube, O2 TV app, Skylink CZ, Televize Seznam, SledovaniTV, Pohádky, Lepší.TV, Kuki
- LG ThinQ with smartphone app
- HbbTV (Hybrid Broadcast Broadband TV)

Connectivity:
- Built-in Wi-Fi module (2.4/5 GHz)
- Miracast, Airplay
- Bluetooth 5.0 with LG Sound Sync support
- AI ThinQ - voice assistant
- Google Assistant and Amazon Alexa support

Signal reception:
- DVB-T2 (H.265, max. 3840 × 2160/60p)
- DVB-T
- DVB-C
- DVB-T2 (H.265, max. 3840 × 2160/60p)
- Skylink FastScan tuning

Sound:
- Output power 2 × 8 W
- Dolby Digital Plus
- Equalizer

Inputs and outputs:
- 3× HDMI CEC (1×ARC), AV in, RJ45, optical output, 2x USB 2.0 (5 V ⎓ 0.5 A), headphone output 3,5 mm Jack
- HDMI CEC SIMPLINK
- CI+ interface

Playable formats:
- Video: AVI, MP4, MPG, MKV, MOV, DAT, VOB
- Audio: MP3, M4A AAC, WMA
- Image: JPEG, JPG, PNG

Other:
- Recording to drive (PVR-TS format) / drive playback (2x USB port)
- Timeshift
- OSD: EN, CZE, POL, HUN, SVK, GER, FRE, ITA, SPA, GRC, HRV, SRP, BUL, SLV, LIT, RUS, DUT...
- Electronic programming guide (EPG)
- Teletext, clock, timer, parental lock, hotel mode
- Package contents: magic remote, basic remote, quick guide, stand

Power supply, consumption and dimensions:
- Power supply: AC ~ 100–240V, 50/60Hz

SLE 65US800TCSB (65“)
SLE 55US800TCSB (55“)
SLE 50US800TCSB (50“)
SLE 43US800TCSB (43“)
SLE 43FS800TCSB (43“)
SLE 32S800TCSB (32“)

SLE 40FS602TCS

- SMART NETFLIX
- Display diagonal 102 cm (40"), FULL HD
- HD DVB-T/T2/C/S/S2 tuners

Picture:
- Display diagonal 102 cm (40")
- Full HD
- Resolution: 1920 × 1080 pixels
- D-LED
- Brightness 240 cd/m²
- Response time 9.5 ms
- Wide viewing angles 178°/178°
- Digital Comb Filter (DCF)
- Dynamic Noise Reduction (DNR)

SMART interface:
- Smart TV interface – Netflix, Youtube, Store
- HbbTV (Hybrid Broadcast Broadband TV)
- Built-in Wi-Fi module (2.4 GHz)
- DLNA support
- Wireless Display

Signal reception:
- DVB-T2 (H.265, max. 1920 × 1080/60p)
- DVB-T
- DVB-C
- DVB-S2 (H.265, max. 1920 × 1080/60p)
- PAL/SECAM BG/DK/I/L/L'

Sound:
- Output power 2 × 8 W
- Equalizer

Inputs and outputs:
- 2× HDMI (1× ARC), Mini AV in, RJ45, coaxial output, 2x USB 2.0 (5 V ⎓ 0.5 A), headphone jack
- CI+ interface

Plays:
- Video: MKV, AVI, MP4, MOV, XviD
- Audio: MP3, AAC, WAV
- Image: JPEG, JPG

Other:
- Recording to USB drive (PVR-TS format) / playback from USB drive (free TV programmes only)
- Timeshift
- OSD: EN, CZE, POL, HUN, SVK, GER, FRE, ITA, SPA, GRC, HRV, SRP, BUL, SLV, LIT, RUS, DUT, POR, UKR, DAN, FIN, NOR, SWE. ROM
- Electronic programming guide (EPG)
- Teletext
- Clock, timer
- Parental lock
- Hotel Mode

Power supply, consumption and dimensions:
- Power input: AC ~ 180–240V, 50/60Hz
- Dimensions with stand: 904 × 571 × 219 mm
- Dimensions without stand: 904 × 517 × 86 mm
- Weight: 5.9 kg
- VESA: 200 × 100

LED | HD ready | SMART | DVB-T/T2/C/S2 | NETFLIX | YouTube | USB REC

SLE 40FS601TCS

- SMART NETFLIX
- Display diagonal 100 cm (40"), FULL HD
- HD DVB-T/T2/C/S/S2 tuners

Picture:
- Display diagonal 100 cm (40")
- Full HD
- Resolution: 1920 × 1080 pixels
- D-LED
- Brightness 240 cd/m²
- Response time 8.5 ms
- Wide viewing angles 178°/178°
- Digital Comb Filter (DCF)
- Dynamic Noise Reduction (DNR)

SMART interface:
- Smart TV interface – Netflix, Youtube, Store
- HbbTV (Hybrid Broadcast Broadband TV)
- Built-in Wi-Fi module (2.4 GHz)
- DLNA support
- Wireless Display

Signal reception:
- DVB-T2 (H.265, max. 1920 × 1080/60p)
- DVB-T
- DVB-C
- DVB-S2 (H.265, max. 1920 × 1080/60p)
- PAL/SECAM BG/DK/I/L/L'

Sound:
- Output power 2 × 8 W
- Equalizer

Inputs and outputs:
- 2× HDMI (1× ARC), Mini AV in, RJ45, coaxial output, 2x USB 2.0 (5 V ⎓ 0.5 A), headphone jack
- CI+ interface

Plays:
- Video: MKV, AVI, MP4, MOV, XviD
- Audio: MP3, AAC, WAV
- Image: JPEG, JPG

Other:
- Recording to USB drive (PVR-TS format) / playback from USB drive (free TV programmes only)
- Timeshift (free TV programmes only)
- OSD: EN, CZE, POL, HUN, SVK, GER, FRE, ITA, SPA, GRC, HRV, SRP, BUL, SLV, LIT, RUS, DUT, POR, UKR, DAN, FIN, NOR, SWE. ROM
- Electronic programming guide (EPG)
- Teletext
- Clock, timer
- Parental lock
- Hotel Mode

Power supply, consumption and dimensions:
- Power input: AC ~ 100–240V, 50/60Hz
- Dimensions with stand: 904 × 571 × 219 mm
- Dimensions without stand: 904 × 517 × 86 mm
- Weight: 5.9 kg
- VESA: 200 × 100

LED | FULL HD 1920×1080 | SMART | DVB-T/T2/C/S2 | NETFLIX | YouTube | USB REC

SLE 32S602TCS

- SMART NETFLIX
- Display diagonal 80 cm (32"), HD READY
- HD DVB-T/T2/C/S/S2 tuners

Picture:
- Display diagonal 80 cm (32")
- HD Ready
- Resolution: 1366 × 768 pixels
- D-LED
- Brightness 220 cd/m²
- Response time 6.5 ms
- Wide viewing angles 178°/178°
- Digital Comb Filter (DCF)
- Dynamic Noise Reduction (DNR)

SMART interface:
- Smart TV interface – Netflix, Youtube, Store
- HbbTV (Hybrid Broadcast Broadband TV)
- Built-in Wi-Fi module (2.4 GHz)
- DLNA support
- Wireless Display

Signal reception:
- DVB-T2 (H.265, max. 1920 × 1080/60p)
- DVB-T
- DVB-C
- DVB-S2 (H.265, max. 1920 × 1080/60p)
- PAL/SECAM BG/DK/I/L/L'

Sound:
- Output power 2 × 5 W
- Equalizer

Inputs and outputs:
- 2× HDMI (1× ARC), Mini AV in, RJ45, coaxial output, 2x USB 2.0 (5 V ⎓ 0.5 A), headphone jack
- CI+ interface

Plays:
- Video: MKV, AVI, MP4, MOV, XviD
- Audio: MP3, AAC, WAV
- Image: JPEG, JPG

Other:
- Recording to USB drive (PVR-TS format) / playback from USB drive (free TV programmes only)
- Timeshift (free TV programmes only)
- OSD: EN, CZE, POL, HUN, SVK, GER, FRE, ITA, SPA, GRC, HRV, SRP, BUL, SLV, LIT, RUS, DUT, POR, UKR, DAN, FIN, NOR, SWE. ROM
- Electronic programming guide (EPG)
- Teletext
- Clock, timer
- Parental lock
- Hotel Mode

Power supply, consumption and dimensions:
- Power input: AC ~ 180–240V, 50/60Hz
- Dimensions with stand: 726 × 480 × 179mm
- Dimensions without stand: 726 × 428 × 82 mm
- Weight: 3.6 kg
- VESA: 100 × 100

SLE 32S601TCS

- SMART NETFLIX
- Display diagonal 80 cm (32"), HD READY
- HD DVB-T/T2/C/S/S2 tuners

Picture:
- Display diagonal 80 cm (32")
- HD Ready
- Resolution: 1366 × 768 pixels
- D-LED
- Brightness 220 cd/m²
- Response time 6.5 ms
- Wide viewing angles 178°/178°
- Digital Comb Filter (DCF)
- Dynamic Noise Reduction (DNR)

SMART interface:
- Smart TV interface – Netflix, Youtube, Store
- HbbTV (Hybrid Broadcast Broadband TV)
- Built-in Wi-Fi module (2.4 GHz)
- DLNA support
- Wireless Display

Signal reception:
- DVB-T2 (H.265, max. 1920 × 1080/60p)
- DVB-T
- DVB-C
- DVB-S2 (H.265, max. 1920 × 1080/60p)
- PAL/SECAM BG/DK/I/L/L'

Sound:
- Output power 2 × 5 W
- Equalizer

Inputs and outputs:
- 2× HDMI (1× ARC), Mini AV in, RJ45, coaxial output, 2x USB 2.0 (5 V ⎓ 0.5 A), headphone jack
- CI+ interface

Plays:
- Video: MKV, AVI, MP4, MOV, XviD
- Audio: MP3, AAC, WAV
- Image: JPEG, JPG

Other:
- Recording to USB drive (PVR-TS format) / playback from USB drive (free TV programmes only)
- Timeshift (free TV programmes only)
- OSD: EN, CZE, POL, HUN, SVK, GER, FRE, ITA, SPA, GRC, HRV, SRP, BUL, SLV, LIT, RUS, DUT, POR, UKR, DAN, FIN, NOR, SWE. ROM
- Electronic programming guide (EPG)
- Teletext
- Clock, timer
- Parental lock
- Hotel Mode

Power supply, consumption and dimensions:
- Power input: AC ~ 180–240V, 50/60Hz
- Dimensions with stand: 726 × 477 × 182mm
- Dimensions without stand: 726 × 428 × 82mm
- Weight: 3.6 kg
- VESA: 100 × 100

SLE 24S602TCS

- SMART NETFLIX
- Display diagonal 60 cm (24"), HD READY resolution
- HD DVB-T/T2/C/S/S2 tuners

Picture:
- Display diagonal 60 cm (24")
- HD Ready
- Resolution: 1366 × 768 pixels
- D-LED
- Brightness 180 cd/m²
- Response time 11.5 ms
- Wide viewing angles 178°/178°
- Digital Comb Filter (DCF)
- Dynamic Noise Reduction (DNR)

Signal reception:
- SMART interface:
- Smart TV interface – Netflix, Youtube, Store
- HbbTV (Hybrid Broadcast Broadband TV)
- Built-in Wi-Fi module (2.4 GHz)
- DLNA support
- Wireless Display

Signal reception:
- DVB-T2 (H.265, max. 1920 × 1080/60p)
- DVB-T
- DVB-C
- DVB-T2 (H.265, max. 1920 × 1080/60p)
- PAL/SECAM BG/DK/I/L/L'

Sound:
- Output power 2 × 3 W
- Equalizer

Inputs and outputs:
- 2× HDMI (1× ARC), Mini AV in, RJ45, coaxial output, 2x USB 2.0 (5 V ⎓ 0.5 A), headphone jack
- CI+ interface

Plays:
- Video: MKV, AVI, MP4, MOV, XviD
- Audio: MP3, AAC, WAV
- Image: JPEG, JPG

Other:
- Recording to USB drive (PVR-TS format) / playback from USB drive (free TV programmes only)
- Timeshift (free TV programmes only)
- OSD: EN, CZE, POL, HUN, SVK, GER, FRE, ITA, SPA, GRC, HRV, SRP, BUL, SLV, LIT, RUS, DUT, POR, UKR, DAN, FIN, NOR, SWE. ROM
- Electronic programming guide (EPG)
- Teletext
- Clock, timer
- Parental lock
- Hotel Mode

Power supply, consumption and dimensions:
- Power input: AC ~ 180–240V, 50/60Hz
- Dimensions with stand: 552 × 365 × 134 mm
- Dimensions without stand: 552 × 328 × 84 mm
- Weight: 3.2 kg
- VESA: 200 × 100

SLE 43F17TCS

- Display diagonal 109 cm (43"), FULL HD
- HD DVB-T/T2/C/S/S2 tuners
- Playback and recording to USB drive

Picture:
- Display diagonal 109 cm (43")
- Full HD
- 1920×1080 pixels resolution
- D-LED
- Brightness 200 cd/m²
- Response time 9.5 ms
- Wide viewing angles 178°/178°
- Digital Comb Filter (DCF)
- Dynamic Noise Reduction (DNR)

Signal reception:
- DVB-T2 (H.265, max. 1920 × 1080/60p)
- DVB-T
- DVB-C
- DVB-S2 (Skylink FastScan tuning)
- PAL/SECAM BG/DK/I

Sound:
- Output power 2 × 8 W

Inputs and outputs:
- 2× HDMI (1xARC), Mini AV in, Mini YPbPr, Composite in, coaxial, USB 2.0 (5 V ⎓ 0.5 A), headphone output
- CI+ interface

Plays:
- Video: AVI, MP4, MOV
- Audio: MP3, AAC
- Image: JPEG, JPG
- Text: TXT

Other:
- Recording to USB drive (REC-TS format) / playback from USB drive
- Timeshift
- OSD: EN, CZE, POL, HUN, SVK, GER, FRE, ITA, SPA, GRC, HRV, SRP, BUL, SLV, LIT, RUS, ROM
- Electronic programming guide (EPG)
- Teletext
- Clock, timer
- Parental lock
- Hotel Mode

Power supply, consumption and dimensions:
- Power input: AC ~ 100–240V, 50/60Hz
- Dimensions with stand: 971 × 604 × 201 mm
- Dimensions without stand: 971 × 570 × 91 mm
- Weight: 6.7 kg
- VESA: 200 × 200

LED | FULL HD 1920×1080 | DVB-T/T2/C/S2 | USB REC

SLE 42F16TCS

- Display diagonal 107 cm (42"), FULL HD
- HD DVB-T/T2/C/S/S2 tuners
- Playback and recording to USB drive

Picture:
- Display diagonal 107 cm (42")
- Full HD
- 1920×1080 pixels resolution
- D-LED
- Brightness 200 cd/m²
- Response time 8 ms
- Wide viewing angles 176°/176°
- Digital Comb Filter (DCF)
- Dynamic Noise Reduction (DNR)

Signal reception:
- DVB-T2 (H.265, max. 1920 × 1080/60p)
- DVB-T
- DVB-C
- DVB-S2 (Skylink FastScan tuning)
- PAL/SECAM BG/DK/I

Sound:
- Output power 2 × 8 W

Inputs and outputs:
- 2× HDMI (1xARC), Mini AV in, Mini YPbPr, SCART, coaxial, USB 2.0 (5 V ⎓ 0.5 A), headphone output
- CI+ interface

Plays:
- Video: MKV, AVI, MP4, MOV
- Audio: MP3, AAC
- Image: JPEG, JPG
- Text: TXT

Other:
- Recording to USB drive (REC-TS format) / playback from USB drive
- Time tracking
- OSD: EN, CZE, POL, HUN, SVK, GER, FRE, ITA, SPA, GRC, HRV, SRP, BUL, SLV, LIT, RUS, ROM
- Electronic programming guide (EPG)
- Teletext
- Clock, timer
- Parental lock
- Hotel Mode

Power supply, consumption and dimensions:
- Power input: AC ~ 100–240V, 50/60Hz
- Dimensions with stand: 953 × 213 × 595 mm
- Dimensions without stand: 953 × 86 × 539 mm
- Weight: 8.5 kg
- VESA: 200 × 100

LED | FULL HD 1920×1080 | DVB-T/T2/C/S2 | USB REC

SLE 40F17TCS (40")

- Display diagonal 100 cm (40"), FULL HD
- HD DVB-T/T2/C/S/S2 tuners
- Playback and recording to USB drive

Picture:
- Display diagonal 100 cm (40")
- Full HD
- 1920×1080 pixels resolution
- D-LED
- Brightness 250 cd/m²
- Response time 9.5 ms
- Wide viewing angles 178°/178°
- Digital Comb Filter (DCF)
- Dynamic Noise Reduction (DNR)

Signal reception:
- DVB-T2 (H.265, max. 1920 × 1080/60p)
- DVB-T
- DVB-C
- DVB-S2 (Skylink FastScan tuning)
- PAL/SECAM BG/DK/I

Sound:
- Output power 2 × 8 W

Inputs and outputs:
- 2× HDMI (1xARC), Mini AV in, Mini YPbPr, Composite in, coaxial, USB 2.0 (5 V ⎓ 0.5 A), headphone output
- CI+ interface

Plays:
- Video: AVI, MP4, MOV
- Audio: MP3, AAC
- Image: JPEG, JPG
- Text: TXT

Other:
- Recording to USB drive (REC-TS format) / playback from USB drive
- Timeshift
- OSD: EN, CZE, POL, HUN, SVK, GER, FRE, ITA, SPA, GRC, HRV, SRP, BUL, SLV, LIT, RUS, ROM
- Electronic programming guide (EPG)
- Teletext
- Clock, timer
- Parental lock
- Hotel Mode

Power supply, consumption and dimensions:
- Power input: AC ~ 100–240V, 50/60Hz
- Dimensions with stand: 903 × 556 × 201 mm
- Dimensions without stand: 903 × 517 × 82 mm
- Weight: 5.5 kg
- VESA: 200 × 200

LED | FULL HD 1920×1080 | HEVC.265 | HDMI | USB

SLE 3917TCS

- Display diagonal 99 cm (39"), HD READY
- HD DVB-T/T2/C/S/S2 tuners
- Playback and recording to USB drive

Picture:
- Display diagonal 99 cm (39")
- HD READY
- 1366×768 pixels resolution
- D-LED
- Brightness 250 cd/m²
- Response time 8 ms
- Wide viewing angles 178°/178°
- Digital Comb Filter (DCF)
- Dynamic Noise Reduction (DNR)

Signal reception:
- DVB-T2 (H.265, max. 1920 × 1080/60p)
- DVB-T
- DVB-C
- DVB-S2 (Skylink FastScan tuning)
- PAL/SECAM BG/DK/I

Sound:
- Output power 2 × 8 W

Inputs and outputs:
- 2× HDMI (1xARC), Mini AV in, Mini YPbPr, Composite in, coaxial, USB 2.0 (5 V ⎓ 0.5 A), headphone output
- CI+ interface

Plays:
- Video: AVI, MP4, MOV
- Audio: MP3, AAC
- Image: JPEG, JPG
- Text: TXT

Other:
- Recording to USB drive (REC-TS format) / playback from USB drive
- Timeshift
- OSD: EN, CZE, POL, HUN, SVK, GER, FRE, ITA, SPA, GRC, HRV, SRP, BUL, SLV, LIT, RUS, ROM
- Electronic programming guide (EPG)
- Teletext
- Clock, timer
- Parental lock
- Hotel Mode

Power supply, consumption and dimensions:
- Power input: AC ~ 100–240V, 50/60Hz
- Dimensions with stand: 888 × 546 × 201 mm
- Dimensions without stand: 888 × 507 × 78 mm
- Weight: 5.4 kg
- VESA: 200 × 100

LED HD ready HEVC.265 HDMI USB

SLE 3261TCS (32")

- Display diagonal 80 cm (32"), HD READY resolution
- HD DVB-T/T2/C/S/S2 tuners
- Playback and recording to USB drive
- Frameless design

Picture:
- Display diagonal 80 cm (32")
- HD Ready
- 1366×768 pixels resolution
- D-LED
- Brightness 180 cd/m²
- Response time 8 ms
- Wide viewing angles 178°/178°
- Digital Comb Filter (DCF)
- Dynamic Noise Reduction (DNR)

Signal reception:
- DVB-T2 (H.265, max. 1920 × 1080/60p)
- DVB-T
- DVB-C
- DVB-S2 (Skylink FastScan tuning)
- PAL/SECAM BG/DK/I

Sound:
- Output power 2 × 8 W

Inputs and outputs:
- 3× HDMI, AV in, Mini YPbPr, coaxial, USB 2.0 (5 V ⎓ 0.5 A), headphone output
- CI+ interface

Plays:
- Video: MKV, AVI, MP4, MOV
- Audio: MP3, AAC
- Image: JPEG, JPG
- Text: TXT

Other:
- Recording to USB drive (REC-TS format) / playback from USB drive
- Time tracking
- OSD: EN, CZE, POL, HUN, SVK, GER, FRE, ITA, SPA, GRC, HRV, SRP, BUL, SLV, LIT, RUS, ROM
- Electronic programming guide (EPG)
- Teletext
- Clock, timer
- Parental lock
- Hotel Mode

Power supply, consumption and dimensions:
- Power input: AC ~ 110–240V, 50/60Hz
- Dimensions with stand: 721 × 471 × 191 mm
- Dimensions without stand: 721 × 84 × 426 mm
- Weight: 4.3 kg
- VESA: 200 × 100

LED HD ready HEVC.265 HDMI USB

SLE 3229TCS

- Display diagonal 80 cm (32"), HD READY resolution
- HD DVB-T/T2/C/S/S2 tuners
- Playback and recording to USB drive

Picture:
- Display diagonal 80 cm (32")
- HD Ready
- 1366×768 pixels resolution
- D-LED
- Brightness 200 cd/m²
- Response time 8.5 ms
- Wide viewing angles 178°/178°
- Digital Comb Filter (DCF)
- Dynamic Noise Reduction (DNR)

Signal reception:
- DVB-T2 (H.265, max. 1920 × 1080/60p)
- DVB-T
- DVB-C
- DVB-S2 (Skylink FastScan tuning)
- PAL/SECAM BG/DK/I

Sound:
- Output power 2 × 5 W

Inputs and outputs:
- 2× HDMI (1xARC), Mini AV in, Mini YPbPr, Composite in, coaxial, USB 2.0 (5 V 0.5 A), headphone output
- CI+ interface

Plays:
- Video: AVI, MP4, MOV
- Audio: MP3, AAC
- Image: JPEG, JPG
- Text: TXT

Other:
- Recording to USB drive (REC-TS format) / playback from USB drive
- Timeshift
- OSD: EN, CZE, POL, HUN, SVK, GER, FRE, ITA, SPA, GRC, HRV, SRP, BUL, SLV, LIT, RUS, ROM
- Electronic programming guide (EPG)
- Teletext
- Clock, timer
- Parental lock
- Hotel Mode

Power supply, consumption and dimensions:
- Power input: AC ~ 100–240V, 50/60Hz
- Dimensions with stand: 734×472×201 mm
- Dimensions without stand: 734 × 440 × 83 mm
- Weight: 4.2 kg
- VESA: 100 × 100

LED HD ready DVB-T/T2/C/S2 USB REC

HD READY

SLE 3227TCS

- Display diagonal 80 cm (32"), HD READY resolution
- HD DVB-T/T2/C/S/S2 tuners
- Playback and recording to USB drive

Picture:
- Display diagonal 80 cm (32")
- HD Ready
- 1366×768 pixels resolution
- D-LED
- Brightness 200 cd/m²
- Response time 8 ms
- Wide viewing angles 178°/178°
- Digital Comb Filter (DCF)
- Dynamic Noise Reduction (DNR)

Signal reception:
- DVB-T2 (H.265, max. 1920 × 1080/60p)
- DVB-T
- DVB-C
- DVB-S2 (Skylink FastScan tuning)
- PAL/SECAM BG/DK/I

Sound:
- Output power 2 × 5 W

Inputs and outputs:
- 2× HDMI, Mini AV in/out, Mini YPbPr, coaxial, USB 2.0 (5 V ⎓ 0.5 A)
- CI+ interface

Plays:
- Video: MKV, AVI, MP4, MOV
- Audio: MP3, AAC
- Image: JPEG, JPG
- Text: TXT

Other:
- Recording to USB drive (REC-TS format) / playback from USB drive
- Time tracking
- OSD: EN, CZE, POL, HUN, SVK, GER, FRE, ITA, SPA, GRC, HRV, SRP, BUL, SLV, LIT, RUS, ROM
- Electronic programming guide (EPG)
- Teletext
- Clock, timer
- Parental Guidance
- Hotel Mode

Power supply, consumption and dimensions:
- Power input: AC ~ 100–240V, 50/60Hz
- Energy efficiency: 40 W/<0.5 W in stand-by mode
- Dimensions with stand: 732 × 196 × 474 mm
- Dimensions without stand: 732 × 84 × 434 mm
- Weight: 3.5 kg
- VESA: 100 × 100

LED | HD ready | DVB-T/T2/C/S2 | TIMESHIFT | USB REC | HEVC.265

SLE 2473TCS

- Display diagonal 61 cm (24"), HD READY resolution
- HD DVB-T/T2/C/S/S2 tuners
- Playback and recording to USB drive
- Support for 12 V power supply (12 V adapter not included)

Picture:
- Display diagonal 61 cm (24")
- HD Ready
- 1366×768 pixels resolution
- D-LED
- Brightness 180 cd/m²
- Response time 11.5 ms
- Wide viewing angles 178°/178°
- Digital Comb Filter (DCF)
- Dynamic Noise Reduction (DNR)

Signal reception:
- DVB-T2 (H.265, max. 1920 × 1080/60p)
- DVB-T
- DVB-C
- DVB-S2 (Skylink FastScan tuning)
- PAL/SECAM BG/DK/I/L/L'

Sound:
- Output power 2 × 3 W
- Equalizer

Inputs and outputs:
- 1× HDMI (ARC), Mini AV in, coaxial, USB 2.0 (5V ⎓ 0.5 A), headphone output
- CI+ interface

Plays:
- Video: MKV, AVI, MP4, MOV, XviD
- Audio: MP3, AAC, WAV
- Image: JPEG, JPG
- Text: TXT

Other:
- Recording to USB drive (PVR-TS format) / playback from USB drive
- Time tracking
- OSD: EN, CZE, POL, HUN, SVK, GER, FRE, ITA, SPA, GRC, HRV, SRP, BUL, SLV, LIT, RUS, DUT
- Electronic programming guide (EPG)
- Teletext
- Clock, timer
- Parental lock
- Hotel Mode

Power supply, consumption and dimensions:
- Power supply: AC 180–240 V 50/60 Hz or DC 12 V
- Dimensions with stand: 552 × 365 × 135 mm
- Dimensions without stand: 552 × 328 × 84 mm
- Weight: 2.9 kg
- VESA: 100 × 100

LED | HD ready | DVB-T/T2/C/S2 | USB REC

SLE 2472TCS

- Display diagonal 60 cm (24"), HD READY resolution
- HD DVB-T/T2/C/S/S2 tuners
- Playback and recording to USB drive

Picture:
- Display diagonal 60 cm (24")
- HD Ready
- 1366×768 pixels resolution
- D-LED
- Brightness 180 cd/m²
- Response time 8 ms
- Wide viewing angles 178°/178°
- Digital Comb Filter (DCF)
- Dynamic Noise Reduction (DNR)

Signal reception:
- DVB-T2 (H.265, max. 1920 × 1080/60p)
- DVB-T
- DVB-C
- DVB-S2 (Skylink FastScan tuning)
- PAL/SECAM BG/DK/I

Sound:
- Output power 2 × 3 W
- Equalizer

Inputs and outputs:
- HDMI (ARC), AV in, Mini YPbPr in, VGA, PC Audio in, coaxial, USB 2.0 (5 V ⎓ 0.5 A), headphone jack
- CI+ interface

Plays:
- Video: MKV, AVI, MP4, MOV, XviD
- Audio: MP3, AAC, WAV
- Image: JPEG, JPG
- Text: TXT

Other:
- Recording to USB drive (PVR-TS format) / playback from USB drive
- Time tracking
- OSD: EN, CZE, POL, HUN, SVK, GER, FRE, ITA, SPA, GRC, HRV, SRP, BUL, SLV, LIT, RUS, DUT
- Electronic programming guide (EPG)
- Teletext
- Clock, timer
- Parental lock
- Hotel Mode

Power supply, consumption and dimensions:
- Power input: AC ~ 100–240V, 50/60Hz
- Dimensions with stand: 552 × 372 × 154 mm
- Dimensions without stand: 552 × 330 × 82 mm
- Weight: 2 kg
- VESA: 100 × 100

LED | HD ready | DVB-T/T2/C/S2 | USB REC

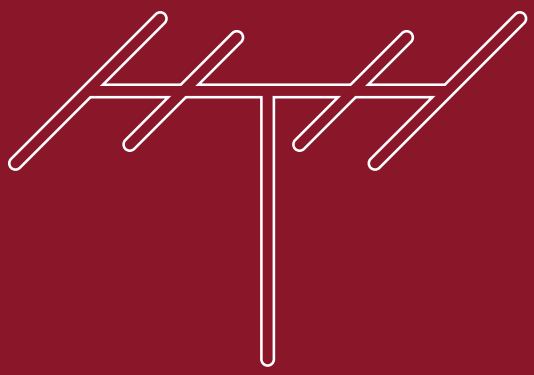

TV accessories

10 ANDROID TV BOX
11 SET TOP BOX
12 CONTROLLERS
13 ANTENNAS

SMP ATV2

ANDROID TV BOX

4K Wi Fi Control

- Android certified TV box - Android 10
- Popular KODI multimedia player
- 4K movies playback
- Remote control with voice control
- HDR 10+, HDR 10, HLG HDR support

Connectivity:
- Dual-band WiFi 2.4/5GHz (802.11 a/b/g/n/ac)
- DLNA Entertainment Sharing/DLNA server
- **Chromecast**
- Bluetooth 4.2

Chipset and memory:
- CPU: Amlogic S905X4 Quad Core ARM A55
- GPU: Penta Core ARM-G31 MP2
- RAM: 2 GB DDRIII
- Flash memory: EMMC 16 GB

Integrated applications:
- Youtube, Spotify, Kodi Player, HBO GO and more applications in the Google Play Store
- Google Play Store, file manager, movie player, music, games and more...
- Televize Seznam, Lepší.TV, SledováníTV, Kuki, Voyo, Mall TV, T-Mobile TV GO, DVTV, Skylink

Supported audio-video formats:
- Decoding
- HD MPEG1/2/4, H.265/H.264/HEVC, WMV, AV1 MP-10, VP9 Profile-2, HD AVC/VC-1, RM/RMVB, Xvid, RealVideo8/9/10

Supported video formats:
- MKV/WMC/MPG/MPEG/DAT/AVI/MOV/ISO/MP4/RM

Supported audio files:
- MP3/AAC/WMA/RM/FLAC/OGG

Supported image files:
- HD JPEG/BMP/GIF/PNG/TIFF
- Subtitle editing options (size, colour, position, synchronization, background colour)

Supported file systems:
- NTFS, FAT32, exFAT

Connection:
- 1x HDMI 2.1 (resolution up to 2160P 60fps HDR)
- 2× (1x USB 3.0 High Speed a 1x USB 2.0, U Disk or USB HDD support)
- 1 × Micro SD slot (support up to 64GB)
- 1x 3.5mm Jack AV output
- 1× RJ45 Ethernet port (10/100Mbit)

Others:
- Power supply: 5V DC power supply / 2A
- Dimensions: 100 × 98 × 20 mm
- Weight: 110 g
- Accessories: Voice and IR remote control, battery, power adapter, HDMI cable, user's manual

SDB 5005T

Tuner and channel
- RF INPUT connector × 1(IEC TYPE, IEC169-2, socket type)
- RF OUTPUT connector × 1(IEC TYPE, IEC169-2, plug-in (loop-through)

Frequency band:
- 174 Mhz ~ 230 Mhz (vhf)
- 470 Mhz ~ 862 Mhz (uhf)
- Signal level: -15 ~ -70dBm

Decoder
- Video decoder
- Audio decoder
- Video formats
- Video output
- Modulation
- MPEG-2 MP@HL, AVC/H.264 HP @L4.1
- MPEG-4 ASP, HEVC/H.265 SUPPORT
- MPEG-1 LAYER 1,2/PCM/HE-AAC V1.0
- ICE958 SPDIF/DOLBY D+ A DOLBY D
- 4:3/16:9 switchable
- HDMI, SCART
- QPSK, 16QAM, 64QAM, 256QAM

Connections
- Power cord
- TUNER
- HDMI
- Data port
- SCART
- SPDIF
- Fixed type
- Antenna input × 1, RF output × 1
- HDMI output × 1
- USB × 1
- To tv × 1
- Coaxial × 1

Power source
- Input voltage
- Power consumption:
- 220-240v~, 50/60hz
- Max. 12 W

SDB 521T

Tuner and channel
- RF INPUT connector × 1(IEC type, IEC169-2, socket type)
- RF OUTPUT connector × 1(IEC type, IEC169-2, plug-in (loop-through)

Frequency band:
- 174 Mhz ~ 230 mhz (vhf)
- 470 Mhz ~ 862 mhz (uhf)
- Signal level: -15 ~ -70 dbm

Decoder
- Video decoder
- Audio decoder
- Input speed
- Video formats
- Video output
- Modulation
- MPEG-2 MP@HL, AVC/H.264 HP @L4.1
- MPEG-4 ASP, HEVC/H.265 HP @L4.1 SUPPORT
- MPEG-1 Layer 1,2/PCM/HE-AAC V1.0
- ICE958 SPDIF/Dolby D+ a Dolby D
- MAX. 48 Mbit/s
- 4:3/16:9 switchable
- HDMI, CVBS
- QPSK, 16QAM, 64QAM, 256QAM

Connections
- TUNER
- HDMI
- **Data port**
- **SCART**
- Antenna input × 1, RF OUTPUT × 1
- HDMI OUTPUT × 1
- USB × 1
- To TV × 1

Power source
- Input voltage
- 5 Vss, 1 A

SDB LEARNING RCU (2020)

LEARNING REMOTE CONTROL

- Control your TV and set-top box easily with a single controller.
- Easy programming between both remote controllers.
- 4 programmable buttons for controlling TV (on/off, volume +/–and output selection).

Compatible models:
- SDB 520T
- SDB 5003T
- SDB 550T
- SDB 5104TD

SLE MAGIC RCU

MAGIC REMOTE

- Switch programmes, search for new content and more with just a click, point, scroll or even voice commands.
- Magic remote can also be used to control connected devices that support HDMI-CEC control. So you'll spend less time searching through complex menus or looking for the right driver.

Driver for the model:
- SLE 800TCSB

DVB-T/T2

LTE

SDA-102
INDOOR DVB-T2 ANTENNA

- Indoor DVB-T2/T antenna
- UHF 470 – 790 MHz
- VHF 174 – 230 MHz, FM
- Impedance 75 Ω
- HDTV READY
- Horizontal polarisation
- Built-in low noise amplifier
- Gain 20 dB
- Continuous setting of amplifier performance
- 2 telescopic rods for better VHF and FM reception
- Power supply 12 V/100 mA (220 V/12 V adapter included)
- Subscriber line included
- LED on indicator

DVB-T/T2

LTE

SDA-112
INDOOR DVB-T2 ANTENNA

- Classic Indoor DVB-T2/T antenna
- UHF 470 – 790 MHz
- VHF 47 – 230 MHz
- Impedance 75 Ω
- HDTV READY
- Horizontal polarisation
- Built-in high-performance low noise amplifier
- Gain 20 dB
- Continuous setting of amplifier performance
- 2 telescopic rods for better VHF and FM reception
- Power supply 12 V/100 mA (220 V/12 V adapter included)
- Subscriber line included
- LED on indicator

DVB-T/T2

LTE

SDA-220
INDOOR DVB-T2 ANTENNA

- Classic Indoor DVB-T2/T antenna
- UHF 470 – 790 MHz
- VHF 47 – 230 MHz
- Impedance 75 Ω
- HDTV READY
- Horizontal polarisation
- Built-in high-performance low noise amplifier
- Gain 20 dB
- Power supply via adapter or via cable
- Subscriber line included

DVB-T/T2

LTE

SDA-302
INDOOR DVB-T2 ANTENNA

- Classic Indoor DVB-T2/T antenna
- Stylish modern design
- UHF 470 – 790 MHz
- VHF 174 – 230 MHz
- Impedance 75 Ω
- HDTV READY
- Horizontal and vertical polarisation
- Built-in high-performance low noise amplifier
- 20dB gain
- Power supply 6 V/100 mA (220 V/6 V adapter included)
- Set-top box or DTV power supply optional
- Subscriber line included
- LED on indicator

DVB-T/T2

LTE

SDA-320
INDOOR DVB-T2 ANTENNA

- Classic Indoor DVB-T2/T antenna
- Stylish modern design
- UHF 470 – 790 MHz
- Impedance 75 Ω
- HDTV READY
- Horizontal polarisation
- Built-in high-performance low noise amplifier
- Gain 20 dB
- 2 telescopic rods for better VHF and FM reception
- Power supply via adapter or via cable
- LED on indicator

DVB-T/T2

LTE

SDA312
INDOOR ANTENNA

- The small but handy Sencor SDA 312 indoor antenna is not only stylish, but can receive DVB-T and T2 terrestrial signals and thus receive a large number of programmes in channels 21–60. At the same time, it also supports HD TV Ready, giving you good picture quality.
- Furthermore, the Sencor SDA 312 antenna boasts an impedance of 75 Ω and horizontal polarization.
- Its great advantages include a gain of up to 20 dB.
- The SDA 312 room antenna incorporates a low-noise amplifier to avoid excessive noise when amplifying the input signal. A great advantage is its smooth power adjustment.
- The built-in 5G filter quickly prevents reception interference.

Technical specifications::
- Variant: Indoor
- Frequency bands: UHF
- Gain: 20 dB
- RF impedance: 75 Ohm
- Antenna cable length: 1.5m
- Power supply: 5 V
- Frequency range: UHF 470–790 MHz
- Positionable: NO
- 5G filter: Yes
- DVB-T support: Yes
- Polarisation: Horizontal
- Colour: BLACK
- Quick selection keys
- Integrated torch light

SDA640
OUTDOOR ANTENNA

- Durable antenna for low signal areas.
- Whether you live in the middle of the woods or your signal problems lie elsewhere, the Sencor SDA 640 outdoor antenna can receive DVB-T and T2 terrestrial signals on UHF frequencies 470–698 MHz and thus receive a large number of programmes on channels 21–69.
- The built-in symmetrising element, which adjusts the impedance of the Sencor SDA 640 antenna to the usual 75 Ω, and the built-in 5G filter to remove interference from mobile signals also play a role.
- Thanks to its robust design, even strong winds will not dare to get to it. Let it stand out by installing it on a mast or roof to have an unprotected area to get the best signal – the range of the Sencor SDA 640 outdoor antenna is up to 120 km. The front to back ratio is specified up to 18 dB, so the signal quality, even with respect to surrounding transmitters, will not be impaired.
- Horizontally polarized outdoor antenna Sencor SDA 640 with 42 elements connect via F-connector. It will provide you with smooth TV viewing not only during a quiet evening.

Technical specifications::
- Variant: Outdoor
- Frequency bands: UHF
- Gain: 10 dB
- RF impedance: 75 Ohm
- Frequency range: UHF 470–790MHZ
- Positionable: MECHANICALLY
- 5G filter: Yes
- DVB-T support: Yes
- Polarisation: Horizontal
- Colour: SILVER



Home multimedia

16 TABLE DVDS
17 PORTABLE TVS
18 PORTABLE DVDS

SDV 7407H
DVD PLAYER

- LED display
- Playback from USB
- HDMI and SCART outputs
- Playable disc formats: DVD-VIDEO, DVD±R/RW, CD, CD-R/RW
- Image formats: MPEG-1 (VCD), MPEG-2 (SVCD, DVD), MPEG-4, XVID, Picture CD
- Audio formats: MP3
- Dolby Digital 2.0
- 16:9/4:3, PAL/NTSC compatible
- External subtitle support
- Multilingual OSD menu
- Front connectors: USB 2.0
- Rear connectors: HDMI, SCART, optical output
- Power supply: 100 – 240 V~, 50/60 Hz
- Max. energy consumption: 8 W/<1 W (stand-by mode)
- Dimensions: (W × H × D): 320 × 33 × 235 mm
- Weight: 1.08 kg

SDV 2512H
DVD PLAYER

- LED display
- Playback from USB
- HDMI and SCART outputs
- Playable disc formats: DVD-VIDEO, DVD±R/RW, CD, CD-R/RW
- Image formats: MPEG-1 (VCD), MPEG-2 (SVCD, DVD), MPEG-4, XVID, Picture CD
- Audio formats: MP3
- Dolby Digital 2.0
- 16:9/4:3, PAL/NTSC compatible
- External subtitle support
- Multilingual OSD menu
- Front connectors: USB
- Rear connectors: HDMI, SCART, AV out (CINCH)
- Power supply: 100 – 240 V~, 50/60 Hz
- Max. energy consumption: 15 W/<1 W (stand-by mode)
- Dimensions: (W × H × D): 225 × 40 × 200 mm
- Weight: 0.64 kg

SDV 1204H
DVD PLAYER

- Playback from USB
- SCART output
- Playable disc formats: DVD-VIDEO, DVD±R/RW, CD, CD-R/RW
- Image formats: MPEG-1 (VCD), MPEG-2 (SVCD, DVD), MPEG-4, XVID, Picture CD
- Audio formats: MP3
- Dolby Digital 2.0
- 16:9/4:3, PAL/NTSC compatible
- External subtitle support
- Multilingual OSD menu
- Front connectors: USB
- Rear connectors: SCART
- Power supply: 100 – 240 V~, 50/60 Hz
- Max. energy consumption: 8 W/<1 W (stand-by mode)
  <1 W (stand-by mode)
- Dimensions (w×h×d): 225 × 40 × 200 mm
- Weight: 0.64 kg

SPV 7012T
PORTABLE TV

10.1" | HDMI | USB | 1024 × 600 | Dolby Digital

- Portable LCD television

Display:
- 10.1" portable LCD television
- Resolution: 1,024 × 600 pixels

Supported formats:
- Built-in TV tuner HD DVB-T2 (HEVC)
- Video: MPEG-4, XviD
- Audio: MP3
- Image: JPEG, BMP

Inputs and outputs:
- USB 2.0 input (supported capacity up to 32 GB)
- Coaxial
- Audio/video output (3.5 mm jack)
- Headphone output (3.5 mm jack)
- HDMI 1.4 output
- Built-in stereo speakers 2× 1.5 W, Dolby Digital

Other:
- USB (media playback, recording)
- Multilingual OSD menu, EPG
- Teletext

Accessories:
- Power adapter, 12 V car charger, antenna, remote control
- Built-in rechargeable lithium polymer battery 2,200 mAh (2 200 mAh)
- Supply voltage: 9–12V
- Dimensions: 245 × 158 × 27mm
- Weight: 0.59 kg incl. battery (without accessories)

SPV 7926T

PORTABLE DVD PLAYER

Display
- 9" TFT LCD display
- Resolution: 800 × 480 pixels

Supported formats:
- DVB-T/T2 (HEVC) Tuner
- DVD±R/RW, CD, CD-R/RW
- MPEG-1 (VCD), MPEG-2 (SVCD, DVD), MPEG-4, XviD
- Picture CD, JPEG, MP3
- Subtitle support (SUB, SRT, TXT)

Inputs and outputs:
- USB (supported capacity up to 32GB)
- SD card slot (up to 32 GB capacity)
- Audio/video output (3.5 mm jack)
- Headphone output (3.5 mm jack)
- HDMI output

Other:
- Built-in stereo speakers, Dolby Digital
- AntiShock memory resilient to shocks
- Multilingual user interface
- Parental lock
- Built-in 1,000 mAh Li-Ion battery
- Accessories: antenna, car charger, power adapter, remote control, batteries, instruction manual
- Power supply: 9 V / 1.5 A DC
- Dimensions of main unit: 275 × 108 × 235 mm
- Weight: 1.37 kg

9" LCD · Xvid · USB · 800 × 480 · Dolby Digital

SPV 2920 BLACK

PORTABLE DVD PLAYER

Display:
- 9" TFT LCD display with LED backlight
- Resolution: 800 × 480 pixels
- Swivel screen design

Supported formats:
- DVD±R/RW, CD, CD-R/RW
- MPEG-1 (VCD), MPEG-2 (SVCD, DVD), MPEG-4, XviD
- Picture CD, JPEG, AC3, MP3
- Subtitle support (SUB, SRT, TXT)

Inputs and outputs:
- USB input (supported capacity up to 32 GB)
- Audio/video output (3.5 mm jack)
- Headphone output (3.5 mm jack)
- Built-in stereo speakers, Dolby Digital

Other:
- AntiShock memory
- Multilingual menu
- Parental lock
- Built-in 1,000 mAh Li-Ion battery
- Maximum playback time 2 h

9" LCD · Xvid · USB · 800 × 480 · Dolby Digital

SPV 2722 BLACK

PORTABLE DVD PLAYER

Display:
- 7" TFT LCD display with LED backlight
- Resolution: 800 × 480 pixels
- Rotating screen

Supported formats:
- DVD±R/RW, CD, CD-R/RW
- MPEG-1 (VCD), MPEG-2 (SVCD, DVD), MPEG-4, XviD
- Picture CD, JPEG, AC3, MP3
- Subtitle support (SUB, SRT, TXT)

Inputs and outputs:
- USB input (supported capacity up to 32 GB)
- Audio/video output (3.5 mm jack)
- Headphone output (jack 3.5 mm)
- Built-in stereo speakers, Dolby Digital

Others:
- AntiShock memory (protection against shocks)
- Multilingual menu
- Parental lock
- Built-in Li-Ion battery
- Maximum playback time 2 hours

7" LCD · Xvid · USB · 800 × 480 · Dolby Digital

Audio

20 PARTY SPEAKERS
23 WIRELESS SPEAKERS
27 MICROSYSTEMS
29 TURNTABLES
30 INTERNET RADIOS
31 CD PLAYERS
34 PORTABLE RADIOS
40 RADIO ALARM CLOCKS
42 MP3 PLAYERS
43 EARPHONES/HEADPHONES

SSS 4201

SOUND SYSTEM:

- Power: 800W
- LED display
- Flashing LED lighting

Sound:
- Power output: 800 W (impedance: 6 Ω)
- 2 bass speakers and 2 treble speakers
- Frequency characteristic: 50 Hz - 20 kHz
- Total harmonic distortion: ≤ 10 %
- Preset equalizer modes (pop, balance, rock, jazz, samba)
- BASS BOOST button

Lighting:
- 7 colours (red, green, blue, yellow, cyan, purple, white)
- 6 lighting effects with the option to turn off lighting

Inputs:
- Bluetooth Audio 5.1
- Audio input (cinch)
- Audio connector (3.5 mm stereo jack)
- 2× USB (for playback and 1× for charging)
- 2× microphone connector (6,3mm Jack)
- Guitar input

Other:
- Karaoke function (echo, volume)
- Power supply: AC ~ 100–230V 50Hz/60Hz

800W
LED display
5.1
USB

SSS 4002

PARTY WIRELESS WATERPROOF SPEAKER

Features
- Power output: 400W
- LED display
- Flashing LED lighting
- FM radio

Sound:
- Power output: 400 W (impedance: 6 Ω)
- 2 bass speakers and 2 treble speakers
- Frequency characteristic: 50 Hz - 18 kHz
- Total harmonic distortion: ≤ 10 %
- Preset equalizer modes (rock, jazz, samba, pop, balance)
- BASS BOOST button

Lighting:
- 7 colours (red, green, blue, yellow, cyan, purple, white)
- 7 lighting effects with the option to turn off lighting

Signal reception:
- FM PLL radio
- Preset stations: 30 FM

Inputs:
- Bluetooth Audio 5.0
- Audio input/output (cinch)
- Audio connector (3.5 mm stereo jack)
- 2× USB for playback
- Microphone connector (6.3 mm jack)
- Guitar input

Other:
- Karaoke function (echo, volume)
- Power supply: AC ~ 100-240V 50Hz/60Hz
- Power efficiency: < 0.5W
- Dimensions: 953 × 326 × 340 mm
- Weight: 15.3 kg

400W
LED display
USB
FM

SSS 3800
AUDIO SYSTEM

- Power output: 60W
- LCD display
- Flashing LED lighting

Sound:
- Power output: 60 W (impedance: 6 Ω for midrange speakers)
- 4 speakers (2 midrange + 2 treble)
- Frequency characteristic: 40 Hz - 15 kHz
- Total harmonic distortion: ≤ 10 % (1 kHz)
- Preset equalizer modes (FLAT, CLASSIC, ROCK, POP, JAZZ)
- SUPER BASS button

Lighting:
- Colourful light show
- 5 lighting modes

Signal reception:
- FM PLL radio
- Preset stations: 30 FM

Inputs:
- Bluetooth Audio 2.1
- Audio connector (3.5 mm stereo jack)
- 2× USB (for playback)
- 2× microphone connector (6.3 mm jack)

Other:
- Built-in rechargeable battery 4,000 mAh
- Karaoke function (echo, volume)

Accessories: wired microphone, instruction manual

60W
2.1
Microphone

SSS 3700
AUDIO SYSTEM

- Power output: 50W
- LED display
- Flashing LED lighting
- TWS function (True Wireless Stereo)

Sound:
- Power output: 50W
- 2 speakers (1 midrange + 1 treble)
- Frequency characteristic: 20 Hz - 17 kHz
- Total harmonic distortion: ≤ 10 % (1 kHz)
- Pre-set equalizer modes (ROCK, POP, JAZZ,)
- SUPER BASS button

Lighting:
- Colourful light show
- 7 lighting modes

Signal reception:
- PLL FM Radio (87.5 – 108 MHz)
- Preset stations: 30 FM

Inputs:
- Bluetooth Audio 4.2
- Audio connector (3.5 mm stereo jack)
- USB (for playback)
- Microphone input (6.3 mm jack)
- Guitar input (6.3 mm jack)

Other:
- Built-in rechargeable battery 4,000 mAh
- Playback time of up to 9 hours (at 75% volume)
- Karaoke function (echo, volume)

50W
4.0

SSS 3500
PARTY WIRELESS WATERPROOF SPEAKER

Features:
- Waterproof speaker with IPX4 protection level
- Light effects with the option to switch off
- TWS function (True Wireless Stereo)
- BASS boost button
- Powerbank function

Sound:
- Maximum speaker output 80 W
- 4 speakers (2 mid-bass, 2 tweeters)
- Digital sound processor (DSP)
- Frequency response: 40 Hz –16 kHz
- Total harmonic distortion: ≤ 1 %

Inputs:
- Bluetooth Audio 5.0
- Connection distance up to 15 m
- Aux audio input (3.5 mm stereo connector)
- USB playback (MP3 format supported)
- TF card slot (MP3 format supported)
- 6.3 mm microphone input

Other:
- Built-in rechargeable battery: 9,000 mAh Li-Ion
- Playback time up to 18 hours (at 50% volume)
- Accessories: USB charging cable, 3.5mm external cable (Aux), user's manual
- Dimensions: 397 × 205 × 180 mm
- Weight: 3,900 g

80W
IPX4
USB

70W
LED display

SSS 3600 KIDS
AUDIO SYSTEM

- Bluetooth speaker for kids with microphone
- Party speaker for kids
- Karaoke with optional recording
- Multi-colour LED speaker lighting
- Built-in rechargeable battery

Sound:
- Power output: 70 W (impedance: 4 Ω)
- Frequency response: 40 Hz - 16 kHz
- Total harmonic distortion: ≤ 1 %
- 3 speakers (2 midrange + 1 subwoofer)
- Equalizer (6 presets)

Inputs:
- Bluetooth Audio 5.0
- Bluetooth connection distance up to 15 m
- Aux audio input (3.5 mm stereo jack)
- USB input
- MicroSDHC card slot
- Microphone input (6.3 mm jack)
- Guitar input (6.3 mm jack)

Others:
- FM PLL radio
- LED display
- Karaoke with ECHO function and volume setting
- Built-in battery: 3000 mAh Li-Ion
- Playback time of up to 10 hours (at 50% volume)
- Charging: 9 V (LED indication) or 12 V
- Audio output (mono)

LED display
3.0
Microphone
30W

SSS 3200 KIDS
AUDIO SYSTEM

- Party speaker for kids
- Karaoke with optional recording
- Multi-colour LED speaker lighting
- Built-in rechargeable battery

Sound:
- Power output: 30 W (impedance: 4 Ω)
- Frequency response: 100 Hz - 20 kHz
- Total harmonic distortion: 1%
- 2 speakers (midrange + subwoofer)
- Equalizer (6 presets)

Inputs:
- Bluetooth Audio 3.0
- Connection distance up to 15 m
- Aux audio input (3.5 mm stereo jack)
- USB input
- MicroSDHC card slot
- Microphone input (6.3 mm jack)
- Guitar input (6.3 mm jack)

Others:
- FM PLL radio
- LED display
- Karaoke with ECHO function and volume setting
- Built-in battery: 1800 mAh Li-Ion
- Playback time up to 5 hours
- Charging: 9 V (LED indication) or 12 V

SSS 6602 HYPE L BLACK

Features
- Waterproof speaker with protection level: IPX7
- Speaker cover made of premium fabric
- TWS function (True Wireless Stereo)
- LED Status indicator

Sound:
- Maximum speaker output 30 W (impedance: 4 Ω)
- 3 speakers + 2 passive radiators
- Digital sound processor (DSP)
- Frequency response: 60 Hz –20 kHz
- Total harmonic distortion: ≤ 1 %
- Equalizer modes

Inputs:
- Bluetooth Audio 5.0
- Aux audio input (3.5 mm stereo connector)
- TF card slot (MP3 format)

Other:
- Hands-free function
- Built-in rechargeable battery: 5000 mAh Li-Ion
- Playback time of up to 8 hours at 50% volume
- USB-C charging
- Max. charging time: 3.5 hours
- Accessories: USB charging cable, user's manual
- Dimensions: 224 × 94 × 90 mm
- Weight: 981 g

30W
IPX7
5.0

SSS 6502 HYPE BLACK

Features
- Waterproof speaker with protection level: IPX7
- Speaker cover made of premium fabric
- TWS function (True Wireless Stereo)
- LED Status indicator

Sound:
- Maximum speaker output 20 W (impedance: 4 Ω)
- 2 speakers + 2 passive radiators
- Digital sound processor (DSP)
- Frequency response: 70 Hz –16 kHz
- Total harmonic distortion: ≤ 1 %
- Equalizer modes

Inputs:
- Bluetooth Audio 5.0
- Aux audio input (3.5 mm stereo connector)
- TF card slot (MP3 format)

Other:
- Hands-free function
- Built-in rechargeable battery: 4400 mAh Li-Ion
- Playback time of up to 8 hours at 50% volume
- USB-C charging
- Max. charging time: 3 hours
- Accessories: USB charging cable, strap, user manual
- Dimensions: 189 × 80 × 76 mm
- Weight: 576 g

20W
IPX7
5.0

SSS 6202 HYPE S

Features
- Waterproof speaker with protection level: IPX7
- Speaker cover made of premium fabric
- TWS function (True Wireless Stereo)
- LED speaker illumination

Sound:
- Maximum speaker output 16 W (impedance: 4 Ω)
- 2 speakers + 2 passive radiators
- Frequency response: 80 Hz –16 kHz
- Total harmonic distortion: ≤ 1 %

Inputs:
- Bluetooth Audio 5.0
- Aux audio input (3.5 mm stereo connector)
- TF card slot (MP3 format)

Other:
- Hands-free function
- Built-in rechargeable battery: 3600 mAh Li-Ion
- Playback time of up to 12 hours at 50% volume
- USB-C charging
- Max. charging time: 5 hours
- Accessories: USB charging cable, user's manual
- Dimensions: 110 × 94 × 90 mm
- Weight: 460 g

16W
IPX7
5.0

SSS 6800 SIRIUS MAXI
BLUETOOTH SPEAKER

Features
- Waterproof speaker with IPX6 protection level
- Speaker cover made of premium fabric
- TWS function (True Wireless Stereo)
- LED status indicator (connection/battery state)
- Powerbank function

Sound:
- Maximum speaker output 60 W
- Total power output (RMS) 50 W
- 4 speakers (2 mid-bass, 2 treble) + 2 passive radiators
- Digital sound processor (DSP)
- Frequency response: 80 Hz –16 kHz
- Total harmonic distortion: ≤ 1 %

Inputs:
- Bluetooth Audio 4.2
- Connection distance: up to 15 m
- Aux audio input (3.5 mm stereo connector)

Other:
- Textile strap for easy handling
- Hands-free function
- Built-in rechargeable battery: 10,000 mAh Li-Ion
- Playback time up to 10 hours
- USB-C charging
- Max. charging time: 6 hours
- Accessories: USB charging cable, 3.5 mm external cable (aux), textile strap, user's manual
- Dimensions: 320 × 134 × 134mm
- Weight: 2,600 g

4.2 IPX6 60W

STEREO & VIDEO VÝROBEK ROKU 2018–2019

PALEC COMPUTER

SSS 6400N SIRIUS BLACK
SSS 6400N SIRIUS BLUE
SSS 6400N SIRIUS RED
BLUETOOTH SPEAKER

Features:
- Waterproof speaker with IPX6 protection level
- Speaker cover made of premium fabric
- Easy connection via NFC
- TWS function (True Wireless Stereo)
- LED Status indicator

Sound:
- Maximum speaker output 30 W (impedance: 4 #)
- Total power output (RMS) 25 W
- 2 speakers + 2 passive radiators
- Digital sound processor (DSP)
- Frequency response: 80 Hz –16 kHz
- Total harmonic distortion: ≤ 1%

Inputs:
- Bluetooth Audio 4.2
- Connection distance up to 15 m
- Aux audio input (3.5 mm stereo connector)

Other:
- Textile strap for easy handling
- Hands-free function
- Built-in rechargeable battery: 4,000 mAh Li-Ion
- Playback time up to 7 hours
- Micro USB charging
- Max. charging time: 3 hours
- Accessories: USB charging cable, 3.5 mm external cable (Aux), user's manual
- Dimensions: 187 × 78 × 78 mm
- Weight: 620 g

30W IPX6 4.2 DSP NFC 4000 mAh

SSS 6100N SIRIUS MINI BLACK
BLUETOOTH SPEAKER

Features
- Waterproof speaker with protectionlevel IPX6
- Speaker cover made of premium fabric
- Easy connection via NFC
- TWS function (True Wireless Stereo)
- LED Status indicator

Sound:
- Surround sound
- Maximum speaker output 16W (2x8W, Impedance: 4 Ω)
- Total power output (RMS) 12 W
- 2 speakers + 2 passive radiators
- Digital sound processor (DSP)
- Frequency response: 80 Hz –16 kHz
- Total harmonic distortion: ≤ 1 %
- Signal to noise ratio: >60 dB

Inputs:
- Bluetooth Audio 4.2

16W IPX6 4.2 DSP 2500 mAh NFC

SSS 6700 NYX MAXI
WIRELESS SPEAKER

60W | IPX6 | 7200 mAh

Features:
- IPX6 waterproof speaker
- Speaker cover made of premium fabric
- TWS function (True Wireless Stereo)
- Powerbank functions

Sound:
- Maximum speaker power 60 W
- 4 speakers (2 mid-bass, 2 tweeters) + 2 passive radiators
- Digital Sound Processor DSP
- Frequency response: 65–20 kHz
- Total harmonic distortion: ≤ 1 %

Inputs:
- Bluetooth Audio 5.0
- Connection distance up to 10 m
- Audio input Aux (3.5 mm stereo connector)

Other:
- Equalizer (3 presets)
- Textile strap for easy handling
- Hands-free function
- Built-in rechargeable battery: 7,200 mAh Li-Ion
- Playback time up to 9 hours (at 50% volume)
- USB-C charging
- Charging time max. 5 hours

Accessories:
- USB charging cable, 3.5 mm external cable (Aux), user's manual
- Dimensions: 310 × 175 × 123 mm
- Weight: 2 200 g

SSS 1110 NYX BLACK
BLUETOOTH SPEAKER WITH AN IPX7 RATING

10W | IPX7 | 5.0 | 2000 mAh

- Waterproof speaker with IPX7 rating
- Speaker cover made of premium fabric
- TWS function (True Wireless Stereo)
- LED Status indicator
- FM radio

Sound:
- Maximum speaker output 10 W (impedance: 4 Ω)
- 2 speakers + 1 passive radiator
- Frequency response: 80 Hz –16 kHz
- Total harmonic distortion: ≤ 1 %

Inputs:
- Bluetooth Audio 5.0
- Connection distance up to 30 m
- TF card input

Other:
- Silicon strap for easy handling
- Hands-free function
- Built-in rechargeable battery: 2,000 mAh Li-Ion
- Playback time up to 6 hours
- Micro USB charging
- Max. charging time: 3 hours

Accessories:
- USB charging cable, user's manual
- Dimensions: 200 × 77 × 47 mm
- Weight: 360 g

WIRELESS SPEAKERS

SSS 1060 NYX GREEN
SSS 1060 NYX BLUE
SSS 1060 NYX RED
SSS 1060 NYX BLACK

BLUETOOTH SPEAKER WITH AN IPX7 RATING

- Waterproof speaker with IPX7 rating
- Speaker cover made of premium fabric
- TWS function (True Wireless Stereo)
- LED Status indicator
- FM radio

Sound:
- Maximum speaker output 5 W (impedance: 4 Ω)
- 1 speaker + 1 passive radiator
- Frequency response: 80 Hz –16 kHz
- Total harmonic distortion: ≤ 1 %

Inputs:
- Bluetooth Audio 5.0
- Connection distance up to 15 m
- TF card input

Other:
- Silicon strap for easy handling
- Hands-free function
- Built-in rechargeable battery: 1,200 mAh Li-Ion
- Playback time up to 6 hours
- Micro USB charging
- Max. charging time: 3 hours
- Accessories: USB charging cable, user's manual
- Dimensions: 143 × 94 × 45 mm
- Weight: 210 g

5W | IPX7 | 5.0 | 1200 mAh

SSS 1000 NYX MICRO

WATERPROOF BLUETOOTH SPEAKER

Features
- Waterproof speaker with IPX4 protection level
- Speaker cover made of premium fabric

Sound:
- Maximum speaker output 3 W (impedance: 4 Ω)
- 1 speaker + 1 passive radiator
- Frequency response: 80 Hz –16 kHz
- Total harmonic distortion: ≤ 1 %

Inputs:
- Bluetooth Audio 5.0
- Connection distance up to 15 m
- TF card input

Other:
- Textile strap for easy handling
- Hands-free function
- Built-in rechargeable battery: 800 mAh Li-Ion
- Playback time of up to 13 hours at 75% volume
- Micro USB charging
- Max. charging time: 4 hours
- Accessories: USB charging cable, aux cable, user's manual
- Dimensions: 85 × 85 × 50 mm
- Weight: 148 g

3W | IPX4 | 5.0 | 800 mAh

SSS 81

WIRELESS SPEAKER

Features
- LED display
- Built-in lithium rechargeable battery
- Hours of operation: Max 4~6 hours (*especially depending on volume setting)
- LINE-IN
- Audio in (AUX)
- Max. input voltage 300 mV
- Output power 5 W × 2
- MP3 bit rate 8 kbps – 320 kbps
- Signal-to-noise ratio (SNR) 85 dB
- Distortion < 0.55%
- Music format MP3/WMA/FLAC/WAV
- Operating temperature -5 – 40 °C
- FM radio, 87.5MHz – 108MHz bandwidth
- Bluetooth Version 5.0
- Maximum wireless transmitter output power: 100mW @ 2.4GHz – 2.4835GHz

5W | IPX7 | 5.0

SMC 5700WDBR
MICROSYSTEM

100W USB FM LCD

- Maximum power 100 W
- Powerful and impressive sound
- Premium aluminium design
- Plays CD/MP3/CD-R/CD-RW

Sound:
- Power output: 2× 50W (impedance: 6 Ω)
- Frequency response: 84 Hz - 16 kHz
- Total harmonic distortion: L/R ≤ 10% (1 kHz)
- Equalizer modes:

Internet radio:
- Easy connection via Wi-Fi
- Searching for local stations
- Favourite channel list
- Preset stations: 40 (Internet)

Display:
- 2,8" LCD display
- Brightness dimmer

Radio:
- DAB+ tuner (Digital Audio Broadcasting)
- FM PLL 87.5 MHz – 108 MHz
- Radio Data System (RDS)
- Preset stations: 40 (FM)

Inputs:
- Wireless audio streaming via Bluetooth 4. 2
- Playback from USB flash drives
- Line input (3,5mm stereo jack)

SMC 8000B
MICROSYSTEM

100W USB FM LCD NEW

- Power output: 100W
- LCD display
- Flashing speaker backlight
- Powerful and rich sound

Sound:
- Power output: 100 W (impedance: 6 Ω)
- 2× bass speaker + 2× treble speaker
- Frequency characteristic: 40 Hz - 16 kHz
- Total harmonic distortion: ≤ 10 %
- Equalizer with presets: ROCK/FLAT/POP/CLASSIC/JAZZ
- BASS BOOST button

Lighting:
- 3 colours (blue, red, purple)
- 4 lighting effects with the option to turn off lighting

Signal reception:
- FM PLL radio 87. 5 MHz – 108 MHz
- Preset stations: 30 FM

Inputs:
- Plays CD/MP3/CD-R/CD-RW
- Bluetooth Audio 2.1
- Audio connector (3.5 mm stereo jack)

SMC 4600DBR
MIKROSYSTEM

30W | LED display | USB

- Maximum power 30 W
- Powerful and impressive sound
- Premium aluminium design
- Plays CD/MP3/CD-R/CD-RW

Sound:
- Power output: 2× 15 W (impedance: 4 Ω)
- 2 speakers
- Frequency response: 84 Hz - 16 kHz
- Total harmonic distortion: L/R ≤ 5% (1 kHz)
- Equalizer modes: flat, classical, pop rock, jazz

Display:
- LED display
- Orange colour

Radio:
- DAB+ tuner (Digital Audio Broadcasting)
- FM PLL 87.5 MHz – 108 MHz
- Radio Data System (RDS)
- Preset stations: 40 (FM)

Inputs:
- Wireless audio streaming via Bluetooth 5. 0
- Playback from USB flash drives
- Line input (3.5 mm stereo jack)

Others:
- Sleep timer
- Accessories: remote control, batteries, instruction manual
- Power supply: AC 100–240 V, 50/60 Hz
- Power consumption: max. 30W
- Energy efficiency: < 0.5W
- Dimensions (main unit) 180 × 135 × 245 mm
- Dimensions (speakers): 155 × 254 × 129 mm
- Weight: 4.2 kg (total) 0 × 210 mm
- Weight: 7.8 kg

SMC 4300BR
MIKROSYSTEM

30W | LED display | USB

- Maximum power 30 W
- Powerful and impressive sound
- Premium aluminium design
- Plays CD/MP3/CD-R/CD-RW

Sound:
- Power output: 2× 15 W (impedance: 4 Ω)
- 2 speakers
- Frequency response: 84 Hz - 16 kHz
- Total harmonic distortion: L/R ≤ 5% (1 kHz)
- Equalizer modes: flat, classical, pop rock, jazz

Display:
- LED display
- Orange colour

Radio:
- FM PLL 87.5 MHz – 108 MHz
- Radio Data System (RDS)
- Preset stations: 40 (FM)

Inputs:
- Wireless audio streaming via Bluetooth
- Playback from USB drives
- Line input (3.5 mm stereo jack)

SMC 4120B
MICROSYSTEM

12W | LED display | USB

- Maximum power 12 W
- Powerful and impressive sound
- Premium aluminium design
- Plays CD/MP3/CD-R/CD-RW

Sound:
- Power output: 2× 6 W (impedance: 6 Ω)
- 2 speakers
- Frequency response: 84 Hz - 18 kHz
- Total harmonic distortion: L/R ≤ 5% (1 kHz)
- Equalizer modes: flat, classical, pop rock, jazz

Display:
- LED display
- Orange colour

Radio:
- FM PLL 87.5 MHz – 108 MHz
- Preset stations: 40 (FM)

Inputs:
- Wireless audio streaming via Bluetooth
- Playback from USB drives
- Line input (3.5 mm stereo jack)

STT 510UBA
TURNTABLE

- Dynamic magnetic pickup (MM) Audio-Technica AT3600L with pre-amplifier
- Automatic shut off
- Pitch Control with a stroboscope (speed adjustment)
- Built-in stereo speakers (5 W × 2)

Engine
- 2 speeds: 33/45 rpm
- Belt drive
- DC Servo Motor

Connectivity
- Bluetooth (playback and transmission)
- USB/SD slot (playback and transmission)
- Line-out (Cinch L/R)

Accessories
- MM pickup, dust cover, 45 rpm adapter, external power supply, user's manual
- Dimensions: 450 × 373 × 145mm
- Weight: 3.4 kg

STT 211U
TURNTABLE WITH AUTOMATIC SHUT OFF

- 3 speeds: 33/45/78 rpm
- Digital PLL FM tuner (30 presets for FM band)
- Automatic search
- USB /SD slot
- Direct recording to USB /SD from a vinyl record, radio or external source
- Bluetooth playback (receiver)
- MP3 compatible
- Line output (L/R cinch)
- Integrated stereo speakers (2× 5 W RMS)
- Remote control, instruction manual
- Power supply: 8 W/<1 W in stand-by mode
- Dimensions: 305 × 288 × 124 mm
- Weight: 1.9 kg

STT 016
TURNTABLE

- Vintage turntable with a CD player and cassette player, integrated stereo speakers 2 × 3 W RMS, FM/AM tuner, MP3/WMA support, USB, audio input, remote control
- Turntable
- Vintage turntable with automatic shut off, USB connector, CD/MP3 player and cassette player
- Speed: 33/45/78 rpm
- FM/AM tuner
- Manual tuning
- USB slot
- Direct recording of gramophone records, radio, CDs and cassettes to USB memory
- MP3/WMA compatible
- Headphone connector, RCA aux In
- Integrated stereo speakers (2 × 3 W RMS)

Accessories:
- Remote control
- Power consumption: max. 19 W
- Dimensions: 500 × 340 × 210mm
- Weight: 7.8 kg

SIR 6000WDB
INTERNET RADIO

Wi-Fi Internet radio:
- Easy control with a unique control button
- Over 26,000 Internet radio stations
- AirMusic control application (iOS/Android)
- Power output: 6 W (impedance: 4 Ω)

Internet radio:
- Easy connection via Wi-Fi
- Local station search in Auto/Country/City mode
- Preset stations: 250 (Internet)
- Station management using the MediaU webpage

Display:
- 2.4" LCD display with a full colour spectrum

Reception:
- DAB+ tuner (Digital Audio Broadcasting)
- FM PLL radio tuner (RDS)

Inputs:
- Bluetooth – wireless sound streaming
- Line input (3.5 mm stereo connector)

Other:
- Weather forecast for 5,000 cities
- Accessories: IC remote control, battery, adapter, 3.5mm Aux connector (External), manual

SIR 5000WDB
INTERNET RADIO

Wi-Fi Internet radio:
- Easy control with a unique control button
- Over 26,000 Internet radio stations
- AirMusic control application (iOS/Android)

Internet radio:
- Easy connection via Wi-Fi
- Local station search in Auto/Country/City mode
- Favourite channel list
- Preset stations: 250 (Internet)
- Station management using the MediaU webpage

Sound:
- Power output: 6 W (impedance: 4 Ω)
- Frequency response: 84 Hz–16 kHz
- Total harmonic distortion: L/R ≤ 5% (1 kHz)
- 8 equalizer modes

Display:
- 2.4" LCD display with a full colour spectrum
- Brightness dimmer

Reception:
- DAB+ tuner (Digital Audio Broadcasting)
- FM PLL radio tuner
- Radio Data System (RDS)
- Preset stations: 20 (FM)

Inputs:
- Bluetooth – wireless sound streaming
- Line input (3.5 mm stereo connector)

Other:
- Weather forecast for 5,000 cities
- UPnP/DLNA support
- Time, alarm clock, automatic shut down
- Headphone output (3.5 mm stereo connector)
- Accessories: IC remote control, battery, adapter 3.5mm Aux connector (External), manual
- Power supply: Adapter 9 V, 1.5 A
- Power consumption: max. 16 W
- Energy efficiency: < 3W
- Dimensions (main unit): 220 × 110 × 110 mm
- Weight: 1.1 kg

SPT 6500
DAB+ CD PLAYER

12W USB SD FM AUX

- Boombox with DAB+
- DAB+ station reception in maximum quality
- Bluetooth 5.0
- Maximum output power: 12 W

Sound:
- Total power output: 12 W (2x 6 W)
- Equalizer function (Rock, Pop, Jazz, Classic, Flat)
- Frequency response: 50 Hz –16 kHz
- Total harmonic distortion: L/R ≤ 10% (1 kHz)

Reception:
- DAB+ tuner (Digital Audio Broadcasting)
- FM PLL radio tuner
- Radio Data System (RDS)
- Preset stations: 30 (30 DAB and 30 FM)
- Telescopic antenna

Inputs and outputs:
- Bluetooth 5.0 - Wireless audio streaming
- USB (for playback)
- SD/MMC slot
- CD-R / RW / MP3
- AUX-IN Jack 3,5 mm
- AUX-OUT Jack 3,5 mm (headphones)

Other:
- LCD display
- Clock
- Sleep timer
- Waking up with buzzer radio, CD or USB
- Remote control
- Power supply: AC 100–240 V / 60 Hz or 8 × 1.5 V battery type D / LR20 (not included)
- Power consumption: 28W
- Dimensions: (W × H × D) 389 × 142 × 227 mm
- Weight: 2 kg

SPT 5800
CD PLAYER

25W BT USB FM MP3

- Boombox with CD, BT, MP3, USB, AUX and FM radio
- Power output 25 W RMS (2 × 12.5 W)
- Two active 4 Ω speakers
- Two passive speakers for bass boost
- Disco LED (7 colours) with flashing mode
- Equalizer function (Rock, Pop, Jazz, Flat, Classic)
- Rubberised surface, remote control
- Playback from CD-R/RW, Bluetooth, MP3 and USB
- Programmable playback: 20 CD tracks, up to 99 MP3 songs
- Bluetooth V2.1 + EDR, USB interface
- Aux input for connecting external devices: 3.5 mm jack
- Aux output for connecting headphones: 3.5 mm jack
- Stereo PLL FM receiver 87.5 – 108 MHz
- Digital tuning and frequency display
- Preset stations: 30 for FM radio
- Telescopic FM antenna
- Stereo FM reception indicator
- Stand-by indicator: 3 mm red LED
- Backlit LCD display
- Power supply: AC 230 V / 50 Hz or 8 × 1.5 V battery type D / LR20 (not included)

SPT 4700
CD PLAYER

- Boombox with CD, BT, MP3, SD, USB, AUX and FM radio
- Power output 12 W RMS (2 × 6 W)
- Equalizer function (Rock, Pop, Jazz, Classic)
- Playback from CD-R/RW, Bluetooth, MP3, SD and USB
- Programmable playback: 20 CD tracks, up to 99 MP3 songs
- Bluetooth V4.0, USB interface
- Aux input for connecting external devices: 3.5 mm jack
- Aux output for connecting headphones: 3.5 mm jack
- Stereo PLL FM receiver 87.5 – 108 MHz
- Digital tuning and frequency display
- Preset stations: 40 for FM radio
- Clock, sleep timer, remote control
- Waking up with buzzer radio, CD or USB
- Telescopic FM antenna
- Stereo FM reception indicator
- LCD display
- Power supply: AC 100–240 V 50/60 Hz or 8 × 1.5 V battery type D / LR20 (not included)
- Power consumption: 25W
- Dimensions: (W/H/D) 389 × 142 × 227 mm
- Weight: 2 kg

12W RMS | USB | SD | FM | AUX | MP3

SPT 3907 B
SPT 3907 W
CD PLAYER

- Radio cassette player with CD, BT, MP3, USB and AUX
- Power output 4 W RMS (2 × 2 W)
- Playback from CD-R/RW, Bluetooth, MP3 and USB
- Programmable playback: 20 CD tracks, up to 99 MP3 songs
- Bluetooth V2.1 + EDR, USB interface
- Aux input for connecting external devices: 3.5 mm jack
- Aux output for connecting headphones: 3.5 mm jack
- Stereo PLL FM receiver 87.5 – 108 MHz
- Digital tuning and frequency display
- Preset stations: 30 for FM radio
- Repeat and shuffle playback
- Remote control
- Telescopic FM antenna
- Stereo FM reception indicator
- Backlit LCD display
- Power supply: AC 100–240 V 50/60 Hz or 6 × 1.5 V battery type D / LR20 (not included)
- Power consumption: 14W
- Dimensions: (W × H × D) 280 × 140 × 210 mm
- Weight: 1.7 kg

4W RMS | USB | SD | Kazeta | FM | AUX | MP3

● SPT 3600 BS
● SPT 3600 BR
CD PLAYER

- Boombox with CD, BT, MP3, USB, AUX and FM radio
- Power output 5 W RMS (2 × 2.5 W)
- Playback from CD-R/RW, Bluetooth, MP3 and USB
- Programmable playback: 20 CD tracks, for MP3 up to 99 songs
- Bluetooth V5.0
- USB interface
- Aux input for connecting external devices: 3.5 mm jack
- Stereo PLL FM receiver 87.5 – 108 MHz
- Digital tuning and frequency display
- Preset stations: 40 for FM radio
- Sleep function
- Telescopic FM antenna
- Stereo FM reception indicator
- LED display
- Power supply: AC 100–240V, 50/60Hz or 6 × 1.5V type C / LR14 battery (not supplied)
- Power consumption: 18W
- Dimensions: (W × H × D) 234 × 248 × 132 mm
- Weight: 1.09 kg

5W RMS | USB | FM | AUX | MP3

● SPT 1600 BS
● SPT 1600 BGN
CD PLAYER

- Portable FM radio with CD / MP3 / USB
- Playback from CD-R/RW, MP3
- Programmable playback: 20 CD tracks, up to 99 MP3 songs
- USB connector, folder playback
- Search, skip and repeat tracks on CD and USB
- Stereo PLL FM receiver 87.5 – 108 MHz
- Digital tuning and frequency display
- 20 preset stations for FM radio
- Telescopic FM antenna
- Stereo FM reception indicator
- Power output 2 W RMS (2 × 1 W)
- Aux input for connecting external devices: 3.5 mm jack
- Power supply: AC 230V / 50Hz or 6 x 1.5V battery type C / LR14 / UM2 (not included)
- Power consumption: 12W
- Dimensions: (W × H × D) 230 × 115 × 220 mm
- Weight: 1.2 kg

2W RMS | USB | FM | MP3

○ SRD 7800
DIGITAL RADIO

DAB FM 4W RMS USB

- DAB+ station reception in maximum quality
- Easy automatic station tuning
- Powered by built-in battery or micro USB power supply

Sound
- Total power output (RMS): 4 W (2x2W)
- Frequency response: 0–12kHz
- Total harmonic distortion: L/R ≤ 10% (1 kHz)

Display
- Dot Matrix LCD display with high contrast

Reception
- DAB+ tuner (Digital Audio Broadcasting)
- FM PLL radio tuner
- Radio Data System (RDS)
- Preset stations: 60 (30 DAB and 30 FM)
- Telescopic antenna

Inputs
- Bluetooth – wireless sound streaming
- Aux-in (3.5mm jack)

Others
- Time, automatic shutdown
- Built-in rechargeable Li-Ion battery with 1020 mAh capacity
- Playback time of up to 5 hours at 50% volume
- Micro USB connector for power
- Dimensions: 248 × 153 × 63 mm
- Weight: 0.65 kg
- Accessories: power cord, manual

● SRD 7757B
○ SRD 7757W
DAB/FM RADIO

USB SD DAB FM

Sound:
- Total power output (RMS): 1.5W
- Frequency response: 84 Hz–16 kHz
- Total harmonic distortion: L/R ≤ 10% (1 kHz)

Display:
- 2.4" LCD display with a full colour spectrum

Reception:
- DAB+ tuner (Digital Audio Broadcasting)
- FM PLL radio tuner
- Radio Data System (RDS)
- Preset stations: 20 (10 DAB and 10 FM)
- Telescopic antenna

Inputs:
- Bluetooth – wireless sound streaming
- USB (for playback)
- MicroSD slot

Other:
- Time, alarm clock, automatic shut down
- Automatic time updates
- Headphone output (3.5 mm connector)
- Built-in rechargeable Li-Ion battery with 2,000 mAh capacity
- Playback time of up to 11 hours at 50% volume
- Micro USB connector for power
- Dimensions: 165 × 92 × 43mm
- Weight: 0.3 kg
- Accessories: power cord, manual

● SRD 7100 B
○ SRD 7100 W
DIGITAL RADIO

DAB FM AUX

- DAB+ station reception in maximum quality
- Easy automatic station tuning
- Powered by built-in battery or micro USB power supply

Sound:
- Total power output (RMS): 2W
- Frequency response: 60 Hz-15 kHz
- Total harmonic distortion: ≤10% (1kHz)

Display:
- Dot-Metrix display

Reception:
- DAB+ tuner (Digital Audio Broadcasting)
- FM PLL radio tuner
- Radio Data System (RDS)
- Preset stations: 80 (40 DAB and 40 FM)
- Telescopic antenna

Inputs and outputs:
- Bluetooth – wireless sound streaming
- Aux-In (3.5mm jack)
- Headphone output (3.5mm jack)

Other:
- Time, automatic shutdown
- Automatic time updates
- Rechargeable Li-Ion battery with 1000 mAh capacity
- Playback time of up to 9 hours at 50% volume
- Micro USB connector for power
- Dimensions: 170 × 36 × 90 mm
- Weight: 0.3 kg
- Accessories: power cord, manual

● SRD 3200 B
○ SRD 3200 W
PORTABLE RADIO

1.2W RMS USB SD micro FM AUX

- Portable PLL FM radio receiver with BT, USB, MicroSD and AUX
- Power output: 1.2 W RMS
- Speaker size: 3"
- High sensitivity and excellent sound performance
- Bluetooth V4.0, USB interface, MicroSD slot
- Aux input for connecting external devices: 3.5 mm jack
- Aux output for connecting headphones: 3.5 mm jack
- FM receiver frequency: 87,5 – 108 MHz
- Digital tuning and frequency display
- Preset stations: 50 for FM radio
- Clock, sleep timer
- Waking up with radio / buzzer / USB / MicroSD
- 360° rotary volume control
- Telescopic FM antenna
- Rubberised surface, carrying handle
- Negative backlit LCD display
- Power supply: AC 230 V / 50 Hz or 3 × 1.5 V battery type C / LR14 (batteries not included)

● SRD 2100 B
○ SRD 2100 W
PORTABLE RADIO

1W RMS | FM | AUX

- Portable FM / AM radio receiver
- Power output: 1 W RMS
- Speaker size: 3"
- High sensitivity and excellent sound performance
- Aux output for connecting headphones: 3.5 mm jack
- FM receiver frequency: 87,5 – 108 MHz
- AM receiver frequency: 530 – 1600 kHz
- Analogue tuning
- Telescopic FM antenna
- Rubberised surface, carrying handle
- Power supply: AC 230 V / 50 Hz or 3 × 1.5 V battery type C / LR14 (batteries not included)
- Power consumption: 4W
- Dimensions: (W/H/D) 208 × 164 × 63 mm
- Weight: 0.63 kg

● SRD 210 BS
● SRD 210 BGN
● SRD 210 B
PORTABLE RADIO

1W RMS | FM | AUX

- Portable radio receiver
- Analogue AM/FM receiver
- FM range: 87.5 to 108 MHz
- AM range: 530 to 1600 kHz
- Telescopic FM antenna
- 3.5 mm headphone connector
- Power supply: AC 230 V / 50 Hz or 3 × 1.5 V battery type C (not included)
- Power output: 1W (RMS)
- Power consumption: 3.5W
- Dimensions: 210 × 139 × 53mm
- Weight: 635 g

○ SRD 2215
PORTABLE RADIO

1.2W RMS | USB | SD micro | FM | AUX | 800 mAh

- Portable PLL FM radio receiver with USB and MicroSD input
- Power output: 1.2 W RMS
- Speaker size: 1.75"
- High sensitivity and excellent sound performance
- USB interface
- MicroSD slot
- Aux output for connecting headphones: 3.5 mm jack
- FM receiver frequency: 87,5 – 108 MHz
- Digital tuning and frequency display
- Preset stations: 50 for FM radio
- Sleep timer function (15, 30, 45, 60, 75, 90)
- 360° rotary volume control
- Telescopic FM antenna
- Rubberised surface
- 9–11 hours of playback a 50% volume (FM)
- 800 mAh Li-Ion battery (BL-5C, 3.7 V)
- Micro USB charging port (USB cable not included)
- Power consumption: 5W
- Dimensions: (W × H × D) 132 × 74 × 35 mm
- Weight: 0.19 kg

● SRD 215 B
○ SRD 215 W
PORTABLE RADIO

2W RMS | USB | SD micro | FM | AUX | 1000 mAh

- Pocket radio receiver with USB and MiniSD
- Analogue FM radio with frequency displayed on LED display
- FM range: 88 to 108 MHz
- Telescopic FM antenna, USB connector
- MicroSD card slot (max. 8 GB)
- MP3 playback, headphone connector
- Line input jack
- Mini USB charging connector
- Power supply: lithium battery
- Playback time: up to 10 hours
- Power output: 2W (RMS)
- Two colour variants: black and white
- Dimensions: 72 × 110 × 29 mm
- Weight: 250 g

SRD 1800

PORTABLE FM / AM RADIO

0.5W RMS | FM | AUX

- Power output: 0.5 W RMS
- Aux output for connecting headphones: 3.5 mm jack
- FM receiver frequency: 87,5 – 108 MHz
- AM receiver frequency: 530 – 1600 kHz
- Analogue tuning
- Telescopic FM antenna
- Compact dimensions and low weight
- Rubberised surface
- Power source: 2 × 1.5 V type AA (batteries not included)
- Dimensions (W/H/D) 125 × 71 × 39 mm
- Weight: 0.19 kg

SRD 1100 B
SRD 1100 W

PORTABLE RADIO

0.3W RMS | FM | AUX

- FM/AM radio receiver
- Portable FM/AM radio
- FM receiver frequency: 87,5 – 108 MHz
- AM receiver frequency: 530 – 1600 kHz
- Analogue tuning
- Telescopic FM antenna
- Output power: 0.3 W RMS
- Headphone output: 3.5 mm jack
- Compact dimensions and low weight
- Rubberised surface, belt clip
- Power supply: 2 x 1.5 V type AAA (batteries not included)
- Dimensions: 61 × 122 × 27mm
- Weight: 82 g

SENCOR®

DESIGN RADIO CLOCKS

SRC 1100 | 3100

www.sencor.eu

SRD 340
PROJECTION RADIO ALARM CLOCK

- Radio alarm clock with time projection
- Digital display of time a tuned frequency
- Date and year, white LED display (4.6 cm)
- Time projection in red
- Optional 180° image rotation and focus adjustment
- PLL FM radio with 10 presets
- Dual alarm with weekend cancellation
- Waking up with radio or buzzer
- Snooze function, Sleep function, time countdown
- Display brightness setting – 3 levels, option to turn off display
- Back-up battery 1 × 3 V (CR-2032) for clock (not included)
- Power supply 230 V / 50 Hz
- Power consumption: 5W
- Dimensions: 180 × 100 × 75 mm
- Weight: 455 g

Projection Clock | FM | LED display

SRC 330 GN
SRC 330 OR
PROJECTION RADIO ALARM CLOCK

- Radio alarm clock with time projection, thermometer and calendar
- Digital display of time a tuned frequency
- Date and year, LED display (3 cm)
- Time projection in red
- Optional 180° image rotation and focus adjustment
- PLL FM radio with 10 presets
- Indoor temperature, dual alarm with weekend cancellation
- Waking up with radio or buzzer
- Snooze function, Sleep function, display brightness setting
- Back-up battery 1 × 3 V (CR-2032) for clock (not included)
- Power supply 230 V / 50 Hz
- Dimensions: 188 × 82 × 72 mm
- Weight: 420 g

Projection Clock | FM | LED display

SRC 170 GN
SRC 170 OR
RADIO ALARM CLOCK

- Radio alarm clock
- Digital display of time a tuned frequency
- Date and year, LED display (3 cm)
- PLL FM radio with presets
- Indoor temperature
- Dual alarm with weekend cancellation
- Waking up with radio or buzzer
- Snooze function, Sleep function
- Display brightness setting – 3 levels
- Back-up battery 1 × 3 V (CR-2032) for clock (not included)
- Power supply 230 V / 50 Hz
- Dimensions: 155 × 82 × 72 mm
- Weight: 388 g

FM | LED display

Projection Clock | FM | LED display

● SRC 3100 B
○ SRC 3100 W

PROJECTION RADIO ALARM CLOCK

- Radio alarm clock with time projection
- PLL FM radio with 10 presets
- FM radio receiver 87.5 – 108 MHz
- Amber 2.3 cm LED display (0.9")
- Display brightness setting
- Time projection in red
- 180° rotating lens with adjustable focus
- Dual alarm, waking up with radio or buzzer
- Sleep function, Snooze function
- CR-2032 back-up battery for clock 1 × 3 V (not included)
- Power supply: AC 230 V/ 50 Hz
- Power consumption: 5W
- Dimensions: (W × H × D) 160 × 60 × 57 mm
- Weight: 370 g

FM | LED display

○ SRC 1100 W
● SRC 1100 B

RADIO ALARM CLOCK

- Radio alarm clock
- PLL FM radio with 10 presets
- FM radio receiver 87.5 – 108 MHz
- Display diagonal 1.5 cm (0.6")
- Display brightness setting
- Dual alarm, waking up with radio or buzzer
- Sleep function, Snooze function
- CR-2032 back-up battery for clock 1 × 3 V (not included)
- Power supply: AC 230 V/ 50 Hz
- Power consumption: 5W
- Dimensions: (W/H/D) 140 × 57 × 52 mm
- Weight: 290 g

FM | LED display

○ SRC 136 WH
● SRC 136 B

RADIO ALARM CLOCK

- Radio alarm clock
- 1.5 cm (0.6") LED display
- PLL FM radio
- 20 FM radio presets
- Dual alarm with repeat support
- High/low display brightness setting
- Waking up with radio or buzzer
- Digital volume adjustment
- Turn off radio, Snooze function
- Power supply: AC 230 V / 50 Hz
- Back-up: 2 × 1.5 V type AA (not included)
- Power consumption: 3.5W
- Dimensions: (W/H/D) 46 × 124 × 130 mm
- Weight: 360 g

MP3 PLAYERS

● SFP 7716 BK
● SFP 7716 RD

16 GB MP3/MP4 PLAYER
WITH MICROSD SLOT

- 16 GB internal memory
- Bluetooth 4.1
- MP3 and WMA format support
- 1.8" TFT display, 160 × 128 px
- AMV video format support
- AVI video format support (MJPEG codec)
- MicroSD card slot (max. 128 GB, FAT32 and exFAT support)
- USB drive function
- FM radio
- Recording to WAV
- Pedometer
- Up to 5 hours at 50% volume
- 3.5 jack output
- Key lock function
- Built-in battery (3.7 V / 150 mAh)
- Micro USB connector for charging and data
- Package contents: MP3 player, headphones, USB cable, user's guide
- Dimensions: (w × h × d): 42 × 60 × 20 mm
- Weight: 25 g

16GB LCD FM SD micro

● SFP 4408 BK
● SFP 4408 RD

MP3 PLAYER 8 GB WITH SLOT
FOR MICRO SD

- 8 GB internal memory
- LCD display 1.1"
- MicroSD card slot (max. 128 GB)
- FM radio
- MP3 and WMA format support
- USB drive function
- Micro USB input (FAT32 and exFAT support)
- Rear clip for attachment
- Key lock function
- WAV audio recording
- Up to 7 hours at 50% volume
- Up to 5 hours at 100% volume
- Multi-language MENU
- Built-in battery (3.7 V / 110 mAh)
- Charging via USB cable
- Package contents: MP3 player, headphones, USB cable, user's guide
- Dimensions: (w × h × d): 54 × 33 × 16mm
- Weight: 21 g

8GB LCD FM SD micro

● SFP 5870 BBU
● SFP 5870 BYL
● SFP 5870 BS

8 GB MP3/MP4 PLAYER
WITH MICROSD SLOT

- 8 GB MP3/MP4 player with FM radio
- Plays MP3, MP4 and WMA, displays video, photos, text
- 4.57 colour LCD TFT display
- Built-in FM radio with presets
- ID3 tag and lyrics support
- Multilingual menu (ENG, CZ, SK, HU, PL)
- USB 2.0 interface, USB drive function
- MicroSD card slot (max. 32 GB)
- Programmable playback (repeat one, all tracks, random play all, folder from list
- Equalizer, built-in rear speaker, rechargeable batteries
- Accessories: speakers, USB cable
- Dimensions (h × w × d): 84.5 × 42.5 × 10mm
- Weight: 25 g

8GB LCD FM SD micro

● SEP 120
EARPHONES

- Stylish, modern earphones that, despite their price, serve for a perfect listening experience.
- Speaker diameter: 10mm
- Impedance: 16 ± 10%
- Frequency range: 20Hz-20kHz
- Sensitivity: 95 dB ± 3 dB / 1 mW (sound pressure level at 1 kHz)
- Cable length: 1.2 m ± 5%
- Connector: 3.5mm

● SEP 300
METAL EARPHONES WITH MICROPHONE

- Speaker diameter: 10mm
- Sensitivity: 96 ± 3 dB (SPL at 1 kHz)
- Impedance: 32 Ω ± 10%
- Frequency range: 20 – 20 kHz
- Power cord length: 120cm
- Microphone sizeΦ4x1.5mm
- Microphone sensitivity: 103 dB ± 3 dB /1 mW (SPL at 1 kHz)
- Microphone frequency range: 30 – 16000 Hz

● SEP 510

FULLY WIRELESS TWS EARPHONES

• Bluetooth 5.0 wireless connection.
Battery life up to 7 hours. Battery life up to 6 albums.
Do you like music? With the Sencor SEP510 earphones you can enjoy not just one album, but the entire discography of your favourite artist.
The combined headphone and case with integrated battery boasts up to seven hours of battery life.
Wireless bluetooth earphones with IP44 protection. Reliability comes first
Thanks to Bluetooth version 5.0, the connection to your mobile phone is completely seamless and 100% stable.
The signal range is up to 10 metres, giving you absolute freedom of movement when using the earphones. In addition to this, it is also important to mention durability.
The IP20 rating makes the earphones ideal partners for the gym, for example.

- Diameter of inverters: 10mm
- Impedance: 32 Ω ±10%
- Frequency response: 20 – 20,000 Hz
- Sensitivity: 100 ± 3 dB (@ 1 kHz)
- Microphone sensitivity: –42 dB ± 3 dB
- BT: v5.0
- Max. connection distance: 10m
- Max. charging time: ≤ 2 h
- Maximum playback time: 7 h
- Max. standby time: up to 50 h
- Battery type and capacity: 3.7 V 50 mAh Li-ion battery (each earphone) and 3.7 V 400 mAh Li-Ion(charging and docking station)
- Power supply: via Micro USB cable
- Weight: 41 g
- Colour: black
- Max. radiated power: 2.5 mW / 2.4 GHz – 2.485 GHz

● SEP 520

FULLY WIRELESS TWS EARPHONES

• TWS earphones with Powerbank function and fast 5.0 Bluetooth connection that can provide up to 150 hours of music listening on a single charge. Elegant TWS earphones that offer a lot of music and full power for your mobile phone thanks to a 2200 mAh Li-ion battery. It adapts to every ear with the accessory of 3 interchangeable silicone attachments. They will come in handy for any activity you enjoy. It's up to you how many hours of music you put in your head.

- Diameter of inverters: 6mm
- Impedance: 32 Ω ±10%
- Frequency response: 20 – 20,000 Hz
- Sensitivity: 97 ± 3 dB (@ 1 kHz)
- Microphone sensitivity: –42 dB ± 3 dB
- Bluetooth v5.0
- Max. connection distance: 10m
- Max. charging time: ≤ 3 h
- Maximum playback time: 7 h
- Battery type and capacity: 3.7 V 50 mAh Li-po battery (each earphone) and 3.7 V 2200 mAh Li-Ion(charging and docking station)
- Power supply: via Micro USB cable
- Output (Powerbank): 5 V / 1 A
- Weight: 86 g
- Colour: black
- Max. radiated power: 2.5 mW / 2.4 GHz – 2.485 GHz

Accessories

- Charging cable, silicone cushions in 3 sizes

SEP 700

WIRELESS HEADPHONES WITH BLUETOOTH SUPPORT

Features:
- Up to 20 hours of playback
- Perfect sound quality for all genres of music
- Comfortable enough for all-day wear
- Practical controls and hands-free functionality

Technical specifications:
- Speaker diameter: Ø 40 mm
- Impedance: 64 Ω ± 10%
- Frequency range: 20Hz-20kHz
- Sensitivity: 100 dB ± 3 dB / 1 mW (sound pressure level at 1 kHz)
- Microphone sensitivity: −38 dB ± 3 dB
- Battery type: 3.7 V 300 mAh Li-ion
- Charging time: 2 h
- Playback time: 18 h
- Connector: Micro USB
- Weight: 199 g
- BT: v5.0
- IP 20

Accessories:
- Micro USB cable
- User's manual

SEP 710

WIRELESS HEADPHONES WITH BLUETOOTH SUPPORT

Modern design and high comfort. Thanks to the comfortable padding and pleasant shape, you will forget that you are wearing any headphones. However, a high level of comfort is not offset by a worse appearance. Indeed. Futuristic design with modern elements gives the headphones a future-like appearance.
Bluetooth 5.0 and Jack connection.
Whether you want to pair your Sencor headphones with your laptop, mobile phone or tablet, you'll always get a flawless signal transfer. Thanks to Bluetooth 5.0, low power consumption and high sound quality are guaranteed. However, you can also connect them via the included Jack cable as well as the headphone case. Accessories: charging cable, audio Jack-Jack cable, headphone case
Up to 30 hours of battery life and 400 mAh capacity.
With an integrated 400 mAh battery, the Sencor SEP710 can keep playing for up to 30 hours. To give you an idea, that's several albums from your favourite bands, and you can enjoy the experience completely wirelessly. For charging, there is a MicroUSB connector on the body to quickly and easily recharge the headphones.

Features:
- Latest bluetooth V5.0
- Up to 30 hours of playing time
- Quality sound and comfortable cushioning
- Music can also be listened to via Jack-Jack cable (included)

Technical specifications:
- Speaker diameter: Ø 40 mm
- Impedance: 32 Ω ± 10%
- Frequency range: 20Hz-20kHz
- Sensitivity: 99 dB ± 2 dB / 1 mW (sound pressure level at 1 kHz)
- Microphone sensitivity: −45 dB ± 2 dB
- Battery type: 3.7V 400 mAh Li-ion
- Charging time: 3 h
- Playback time: 30 h
- Connector: Micro USB
- Weight: 217 g
- Bluetooth v5.0
- IP 20

Accessories:
- Charging cable, audio Jack-Jack cable, headphone case

Home

48 WEATHER STATIONS
58 THERMOMETER
60 DIGITAL CLOCKS
63 WIRELESS DOORBELLS
64 DIGITAL PHOTO FRAMES

SENCOR®

Be ready, wherever you are!

WiFi Professional Weather Station with Wireless 7-in-1 Sensor and TH Sensor

SWS 12500

WEATHER UNDERGROUND

weathercloud

SWS 12500 Wi-Fi

PROFESSIONAL WEATHER STATION

Wi Fi | color display | Forecast | DCF Signal

- WiFi professional weather station with 7-in-1 wireless sensor and TH sensor
- Support for global public weather platforms: "Weather Underground" and "Weathercloud"
- Publishing of information about the local weather station on public weather platforms
- Smart device support, online access to data and history
- TRUE BLACK Colour LCD display with 8.4" diagonal (21.4 cm)
- LCD display contract setting for adjusting the viewing angle
- Forecast for 12–24 hours based on changes of air pressure and temperature
- Weather forecast icon (sunny, cloudy, overcast, rain, storm, snow)
- Indoor temperature and humidity measurement with comfort and development indicator
- Outdoor temperature and humidity reading with trend indicator
- Barometric pressure in relative and absolute readings (hPa, inHg, mmHg)
- Indoor temperature range: -5°C to +50°C
- Outdoor temperature range: -40°C to +60°C
- Indoor humidity range: 1% to 90% RH
- Outdoor humidity range: 1% to 99% RH
- Weather index for subjective temperature, wind chill factor, dew point and temperature index
- UV index (0–16) with UV indicator (light, medium, high, very high, extreme)
- Sunlight intensity (Klux, Kfc, W/m2) and tanning time (minutes)
- Recording of max./min. values to memory with date and time indication
- Hourly recording over the past 24 hours
- Alert settings for indoor/outdoor temperature and humidity (low/high)
- Alert settings (weather index, pressure drop, high wind speed and heavy daily precipitation)
- Flashing high/low alert indicator
- Display time, calendar, days of the week, moon phase and sunrise/sunset times
- Setting the moon phase for the northern or southern hemisphere
- Ice alert and comfort level
- Wind gust or average wind speed (in mph, m/s, km/h, knots)
- Beaufort scale and wind speed level indicator
- Momentary and dominant wind direction
- Rainfall measurement using hourly, daily, weekly, monthly and total rainfall display (mm/inch)
- Automatic date and time setting via Wi-Fi (manual setting possible)
- Date and week day (week day in 7 languages: EN, DE, FR, ES, IT, NL, RU)
- Temperature display with °C/°F selection
- 3 display brightness levels: high / low / automatic dimming
- Solar panel for automatic setting of backlight brightness
- Table or wall installation possible
- Wireless 7-in-1 sensor: Wind speed, wind direction, rainfall, temperature, humidity, light intensity and UV (included)
- TH sensor: SWS TH9898-9770-12500 – temperature, humidity (1x sensor in package)
- Support for up to 7 wireless sensors (SWS TH9898-9770-12500)
- Long-distance transmission between the main unit and sensors 7-in-1 / TH – up to 150 m (in open space)
- Weather data calibration (via user interface setting)
- Firmware update support
- Wireless 7-in-1 sensor – Frequency of the main unit: 868MHz
- Wireless TH sensor - Frequency of the main unit: 868MHz
- Main unit power adapter: DC 5 V / 1,000 mA (included), power consumption: 5W
- Main unit back-up battery: 1 × CR-2032 3 V (included)
- Battery to power the 7-in-1 sensor: 3 × 1.5 V type AA (batteries not included – lithium batteries recommended)
- Battery to power the TH sensor: 2 × 1.5 V type AA (batteries not included – lithium batteries recommended)
- Wi-Fi standard: 802.11 b/g/n, Wi-Fi operating frequency: 2.4GHz
- Dimensions of main unit: (W × H × D) 240 × 140 × 21 mm
- Dimensions of the 7-in-1wireless sensor: (W × H × D) 343.5 × 393.5 × 136 mm
- Dimensions of the TH sensor: (W × H × D) 61 × 113 × 39.5 mm
- Weight of main unit: 464 g (including battery, without adapter)
- Weight of 7-in-1 wireless sensor: 673 g (including batteries)
- Weight of TH wireless sensor: 144 g (including batteries)

SWS 9898 Wi-Fi

PROFESSIONAL WEATHER STATION

Wi Fi | color display | Forecast | DCF Signal

- Wi-Fi weather station with wireless 5-in-1 sensor
- Support for global public weather platforms: "Weather Underground" and "Weathercloud"
- Publishing of information about the local weather station on public weather platforms
- Smart device support, online access to data and history
- Colour LCD display with 5.4" diagonal (13.8 cm)
- LCD display contract setting for adjusting the viewing angle
- Forecast for 12–24 hours based on changes of air pressure and temperature
- Weather forecast icon (sunny, cloudy, overcast, rain, storm, snow)
- Indoor temperature and humidity reading with comfort indicator
- Outdoor temperature and humidity reading
- Barometric pressure in relative and absolute readings (hPa, inHg, mmHg)
- Indoor temperature range: -5°C to +50°C
- Outdoor temperature range: -40°C to +60°C
- Indoor humidity range: 20% to 90% RH
- Outdoor humidity range: 1% to 99% RH
- Weather index for subjective temperature, wind chill factor, dew point and temperature index
- Recording of max./min. values to memory with date and time indication
- Hourly recording over the past 24 hours
- Weather alert setting (indoor/outdoor temperature and humidity, decrease in pressure, wind speed and precipitation)
- Flashing high/low alert indicator
- Time, calendar, week day and moon phase indication
- Ice alert and comfort level
- Wind gust or average wind speed (in mph, m/s, km/h, knots)
- Momentary and dominant wind direction
- Precipitation reading using daily, weekly, monthly amounts of rain (mm/in)
- Automatic date and time setting via Wi-Fi (manual setting possible)
- Date and week day (week day in 7 languages: EN, IT, ES, DE, FR, NL, RU)
- Temperature display with °C/°F selection
- 3 display brightness levels: high / low / automatic dimming
- Solar panel for automatic setting of backlight brightness
- Table or wall installation possible
- 5-in-1 sensor included: wind speed, wind direction, precipitation, temperature, humidity
- Long-distance transmission between the main unit and the sensor: up to 150 m (in open space)
- Support for up to 7 wireless sensors (SWS TH9898-9770-12500 – sensors not included)
- Weather data calibration (via user interface setting)
- Firmware update support
- Wireless 5-in-1 sensor– main unit frequency: 868MHz
- Main unit power adapter: DC 5 V / 1,000 mA (included), power consumption: 5W
- Main unit back-up battery: 1 × CR-2032 3 V (included)
- Sensor supply battery: 3 × 1.5 V type AA (batteries not included – lithium batteries recommended)
- Wi-Fi standard: 802.11 b/g/n, Wi-Fi operating frequency: 2.4GHz
- Dimensions of main unit: (W × H × D) 118 × 192.5 × 21 mm
- Dimensions of 5-in-1 wireless sensor: (W × H × D) 343.5 × 393.5 × 136 mm
- Weight of main unit: 265 g (including battery, without adapter)
- Weight of 5-in-1 wireless sensor: 754 g (including batteries)

SWS 9700

PROFESSIONAL WEATHER STATION

color display | 256 Colors | Forecast | DCF Signal

- Professional weather station
- Wireless 5-in-1 sensor
- Display with 256 changing colours
- TRUE COLOR display with 5.8" diagonal (14.7 cm)
- 3 colour changing modes with TRUE BLACK background:
  1) LOOP: enabled/disabled automatic loop with 256 colours
  2) RAINBOW: 8 rainbow colours
  3) OUTDOOR CONDITIONS: 17 colours changing according to outdoor temperature
- PMVA TRUE COLOR display: ultra high contrast ratio, wide viewing angles, excellent sunlight legibility
- Forecast for 12–24 hours based on changes of air pressure and temperature
- Weather forecast icon (sunny, slightly cloudy, cloudy, rain, storm, snow)
- Barometric pressure in relative and absolute readings
- Weather index for indoor dew point, outdoor wind chill, temperature index
- Recording of max./min. values to memory with date and time stamp
- Hourly recording over the past 24 hours
- High/low alert setting (indoor/outdoor temperature and humidity, wind speed and precipitation)
- Orange flashing LED indicator for high/lower alert
- Ice alert and comfort level
- Bar chart with the history of precipitation (past 5 days) or pressure changes (–1, –3, –6, –12, –24 hours)
- Wind gust or average wind speed (in mph, m/s, km/h, knots) including wind direction on a display showing 16 different values
- Precipitation reading using daily, weekly, monthly amounts of rain (mm/in)
- Clock and date controlled by DCF77 signal with update of daylight saving time (DST), manual setting possible
- Date and week day (week day in 5 languages: EN/IT/ES/DE/FR)
- Alert function with pre-alert for low temperature
- 3 display brightness levels: high/low/off
- Table or wall installation possible
- 5-in-1 sensor included: wind speed, wind direction, precipitation, temperature, humidity
- Long-distance transmission between the main unit and the sensor: up to 150 m (in open space)
- Wireless 5-in-1 sensor– main unit frequency: 868MHz
- Main unit power adapter: DC (direct current) 4.5 V / 300 mA (included), power consumption: 1.4W
- Main unit back-up battery: 1 × CR-2032 3 V (included)
- Sensor supply battery: 3 × 1.5 V type AA (batteries not included – lithium batteries recommended)
- Dimensions of main unit: (W × H × D) 136 × 168 × 24.5 mm
- Dimensions of 5-in-1 wireless sensor: (W × H × D) 343.5 × 393.5 × 136 mm
- Weight of main unit: 370 g (including battery, without adapter)
- Weight of 5-in-1 wireless sensor: 734 g (including batteries)

SWS 9300

PROFESSIONAL WEATHER STATION

color display | Forecast | DCF Signal

- Wireless 5-in-1 sensor
- Colour display with 5.4" diagonal (13.8 cm)
- Forecast for 12–24 hours based on changes of air pressure and temperature
- Weather forecast icon (sunny, cloudy, overcast, rain, storm, snow)
- Indoor temperature and humidity reading with comfort indicator
- Outdoor temperature and humidity reading
- Barometric pressure in relative and absolute readings
- Indoor temperature range: -5°C to +50°C
- Outdoor temperature range: -40°C to +80°C
- Indoor humidity range: 20% to 90% RH
- Outdoor humidity range: 1% to 99% RH
- Weather index for subjective temperature, wind chill factor, dew point and temperature index
- Recording of max./min. values to memory with date and time indication
- Hourly recording over the past 24 hours
- High/low alert setting (indoor/outdoor temperature and humidity, wind speed and precipitation)
- Flashing high/low alert indicator
- Time, calendar, week day and moon phase indication
- Ice alert and comfort level
- Alarm clock with low temperature alert
- Bar chart with the history of precipitation (past 5 days) or pressure changes (–1, –3, –6, –12, –24 hours)
- Wind gust or average wind speed (in mph, m/s, km/h, knots)
- Momentary and dominant wind direction
- Beaufort scale
- Precipitation reading using daily, weekly, monthly amounts of rain (mm/in)
- Clock and date controlled by DCF77 signal with update of daylight saving time (DST), manual setting possible
- Date and week day (week day in 5 languages: EN, IT, ES, DE, FR)
- Temperature display with °C/°F selection
- 3 display brightness levels: high / low / automatic dimming
- Solar panel for automatic setting of backlight brightness
- Table or wall installation possible
- 5-in-1 sensor included: wind speed, wind direction, precipitation, temperature, humidity
- Long-distance transmission between the main unit and the sensor: up to 150 m (in open space)
- Wireless 5-in-1 sensor– main unit frequency: 868MHz
- Main unit power adapter: DC 5 V / 600 mA (included), power consumption: 3W
- Main unit back-up battery: 1 × CR-2032 3 V (included)
- Sensor supply battery: 3 × 1.5 V type AA (batteries not included – lithium batteries recommended)
- Dimensions of main unit: (W × H × D) 118 × 192.5 × 21 mm
- Dimensions of 5-in-1 wireless sensor: (W × H × D) 343.5 × 393.5 × 136 mm
- Weight of main unit: 280 g (including battery, without adapter)
- Weight of 5-in-1 wireless sensor: 734 g (including batteries)

SWS 7300
WEATHER STATION

color display | Forecast | DCF Signal

- Weather station with wireless sensor
- Colour display with 5.4" diagonal (13.8 cm)
- Weather forecast icon (sunny, cloudy, overcast, rain, snow)
- Indoor temperature and humidity reading with trend indicator
- Outdoor temperature and humidity reading with trend indicator
- Barometric pressure in relative and absolute readings
- Indoor temperature range: -5°C to +50°C
- Outdoor temperature range: -40°C to +60°C
- Indoor humidity range: 20% to 90% RH
- Outdoor humidity range: 1% to 99% RH
- Weather index for dew point and temperature index
- Recording of max./min. values to memory with date and time indication
- Hourly recording over the past 24 hours
- High/low alert setting (indoor/outdoor temperature and humidity)
- Flashing high/low alert indicator
- Time, calendar, week day and moon phase indication
- Ice alert and comfort level
- Clock and date controlled by DCF77 signal with update of daylight saving time (DST), manual setting possible
- Date and week day (week day in 7 languages: EN, IT, ES, DE, FR, NL, RU)
- Temperature display with °C/°F selection
- 3 display brightness levels: high / low / automatic dimming
- Solar panel for automatic setting of backlight brightness
- Table or wall installation possible
- Option to connect up to 8 sensors
- 1 sensor included (SWS TH8700-8800-7300)
- Long-distance transmission between the main unit and the sensor: up to 30 m (in open space)
- Sensor transmission frequency: 433MHz
- Main unit power adapter: DC 5 V / 1,000 mA (included), power consumption: 5W
- Main unit back-up battery: 1 × CR-2032 3 V (included)
- Sensor power supply: 2 × 1.5 V type AA (batteries not included)
- Dimensions of main unit: (W × H × D) 118 × 192.5 × 21 mm
- Dimensions of wireless sensor: (W × H × D) 61 × 113 × 39.5 mm
- Weight of main unit: 280 g (including battery, without adapter)
- Weight of wireless sensor: 92 g

SWS 5600
WEATHER STATION

- Weather station with wireless sensor
- Weather forecast icon (sunny, slightly cloudy, cloudy, rain, snow)
- Indoor temperature and humidity reading
- Outdoor temperature and humidity reading
- Recording of max./min. values to memory (24 h)
- Indoor temperature range: -10 to +50°C
- Outdoor temperature range: -20°C to +50°C
- Humidity range: 20% to 99% RH
- Temperature display with °C/°F selection
- 3 display brightness levels: high/low/off
- Digital time, date and week day, Snooze function
- Clock controlled by DCF77 signal (manual setting possible)
- 12/24 hour format, colour LCD display, table installation
- Low battery indicator for outdoor sensors, 1 sensor included
- Long-distance transmission – up to 30 m (in open space)
- Sensor transmission frequency: 433MHz
- Battery power supply: 3 x 1.5 V type AAA (batteries not included)
- Main unit power adapter: DC 4.5 V / 150 mA (included)
- Power consumption: 0.9W
- Sensor power supply: 2 x 1.5 V type AAA (batteries not included)
- Dimensions of main unit: (W × H × D) 122 × 118 × 52 mm
- Weight of main unit: 227 g

color display | Forecast | DCF Signal

SWS 5400
WEATHER STATION

- Weather station with projection and wireless sensor
- Weather forecast icon (sunny, slightly cloudy, cloudy, rain, snow)
- Indoor temperature and humidity reading
- Outdoor temperature reading
- Barometric pressure trend indicator
- Recording of max./min. values to memory (24 h)
- Indoor temperature range: -10 to +50°C
- Outdoor temperature range: -20°C to +50°C
- Alert for outdoor temperature
- Indoor humidity range: 20% to 99% RH
- Temperature display with °C/°F selection
- 3 display brightness levels: high/low/off
- Digital time, date and week day
- Week day in 10 languages: CZ, EN, DE, FR, ES, IT, NL, DA, RU, NO
- Snooze function
- Projection of weather forecast with time or temperature
- Rotation of projected image
- Clock controlled by DCF77 signal (manual setting possible)
- 12/24 hour format
- Colour LED display
- Table installation
- Low battery indicator for outdoor sensors
- 1 sensor included
- Transmission up to 70 m (in open space)
- Sensor transmission frequency: 433MHz
- Battery power supply: 2 × 1.5 V type AA (batteries not included)
- Main unit power adapter: DC 4.5 V/150 mA, consumption 0.68W
- Sensor power supply: 2 x 1.5 V type AAA (batteries not included)
- Dimensions of main unit: (W × H × D) 141 × 92 × 51 mm
- Weight of main unit: 173 g

color display | Forecast | DCF Signal | Projection Clock

SWS 5270
WEATHER STATION

- Weather station with wireless sensor
- Weather forecast icon (sunny, slightly cloudy, cloudy, rain, storm)
- Indoor temperature and humidity reading
- Outdoor temperature and humidity reading
- Air pressure reading (hPa)
- Weather trend indicator, ice alert
- Recording of max./min. values to memory (manual reset possible)
- Indoor temperature range: 0 to +50°C
- Outdoor temperature range: -25°C to +70°C
- Humidity range: 20% to 95% RH
- Temperature display with °C/°F selection
- 2 display brightness levels: high/low
- Digital time and date / air pressure indication
- Dual alarm, Snooze function
- Clock controlled by DCF77 signal (manual setting possible)
- 12/24 hour format
- Colour LCD display, table installation
- Low battery indicator for outdoor sensors
- Option to connect up to three sensors
- Option to automatically rotate the readings from all three sensors
- 1 sensor included (SWS TH270-TH5270)
- Long-distance transmission – up to 50 m (in open space)
- Sensor transmission frequency: 433MHz
- Battery power supply: 3 x 1.5 V type AAA (batteries not included)
- Main unit power adapter: DC 5 V / 1.2 A (included)
- Power consumption: < 1W
- Sensor power supply: 2 x 1.5 V type AAA (batteries not included)
- Dimensions of main unit: (W × H × D) 200 × 98 × 50 mm
- Weight of main unit: 205 g

color display | Forecast | DCF Signal

SWS 4270
WEATHER STATION

- Weather station with wireless sensor
- Weather forecast icon (sunny, slightly cloudy, cloudy, rain, storm)
- Forecast for 12–24 hours based on changes of air pressure and temperature
- Indoor temperature and humidity reading
- Outdoor temperature and humidity reading
- Ice alert
- Recording of max./min. values to memory (manual reset possible)
- Indoor temperature range: 0 to +50°C
- Outdoor temperature range: -25°C to +70°C
- Humidity range: 20% to 95% RH
- Temperature display with °C/°F selection
- 3 display brightness levels: hi/low/off
- Programmable automatic display dimming (night mode)
- Digital time and date
- Dual alarm
- Snooze function
- 12/24 hour format
- Colour LED display
- Table installation
- Low battery indicator for outdoor sensors
- Option to connect up to three sensors
- Option to automatically rotate the readings from all three sensors
- 1 sensor included (SWS TH270-4270-5270)
- Long-distance transmission – up to 50 m (in open space)
- Sensor transmission frequency: 433MHz
- Battery power supply: 3 x 1.5 V type AAA (batteries not included)
- Main unit power adapter: DC 5 V / 600 mA (included)
- Power consumption: < 1W
- Sensor power supply: 2 x 1.5 V type AAA (batteries not included)
- Dimensions of main unit: (W × H × D) 94 × 146 × 50 mm
- Weight of main unit: 155 g

color display | Forecast | DCF Signal

○ SWS 4250
WEATHER STATION

- Weather station with wireless sensor
- Weather forecast icon (sunny, slightly cloudy, cloudy, rain)
- Indoor temperature and humidity reading, outdoor temperature and humidity reading
- Recording of max./min. values to memory
- Indoor temperature range: 0 to +50°C
- Outdoor temperature range: -20°C to +60°C
- Humidity range: 20% to 90% RH
- Temperature display with °C/°F selection
- Digital time, date and week day, Snooze function
- Clock controlled by DCF77 signal (manual setting possible)
- 12/24 hour format, colour LCD display
- Table or wall installation possible
- Option to connect up to three sensors
- 1 sensor included (SWS TH4250)
- Long-distance transmission – up to 30 m (in open space)
- Sensor transmission frequency: 433MHz
- Battery power supply: 3 x 1.5 V type AAA (batteries not included)
- Power adapter: DC 4.5 V / 150 mA (included)
- Sensor power supply: 2 × 1.5 V type AA (batteries not included)
- Dimensions of main unit: (W × H × D) 173 × 125 × 22 mm
- Weight of main unit: 238 g

color display | Forecast | DCF Signal

● SWS 51 B
○ SWS 51 W
WEATHER STATION

- Weather station with wireless sensor for temperature and humidity readings
- Large display with blue backlight
- Radio-controlled clock
- Displays time, date, week day and moon phase
- 12/24 hour mode, Snooze function
- Indoor temperature, indoor humidity, outdoor temperature<(>,<)> outdoor humidity
- Display temperature and humidity trends
- Memory for max. and min. temperature and humidity values
- Indoor temperature range: 0 to 50 °C
- Outdoor temperature range: –20 to 60 °C
- Indoor humidity range: 20% to 95% RH
- Outdoor humidity range: 20% to 95% RH
- Comfort index icons, weather forecast icons
- Option to connect up to 3 wireless sensors
- Range in open space: up to 30 m
- Power supply: station 3 × 1.5 V type AA, sensor 2 × 1.5 V type AAA
- Dimensions (h x w x d): 185 × 140 × 30 mm
- Weight: 330 g

Forecast | DCF Signal

SWS 3000 W
WEATHER STATION

- Weather station with wireless sensor
- Weather forecast icon (sunny, slightly cloudy, cloudy, rain, snow)
- Indoor temperature and humidity reading
- Outdoor temperature and humidity reading, indoor and outdoor temperature trend
- Recording of max./min. values to memory
- Indoor temperature range: 0 to +60°C
- Outdoor temperature range: -20°C to +60°C
- Humidity range: 20% to 90% RH
- Temperature display with °C/°F selection
- Moon phases, digital time
- Date and week day (week day in 7 languages: EN/IT/ES/DE/FR/NE/DA)
- Snooze function, 12/24 hour format
- LCD display with brief white backlight
- Low battery indicator, table or wall installation possible
- Option to connect up to three sensors
- 1 sensor included (SWS TH3000)
- Distance transmission between main unit and sensor - up to 50 m (in an open area)
- Sensor transmission frequency: 433MHz
- Power supply: 2 x 1.5 V type AAA (batteries not included)
- Sensor power supply: 2 x 1.5 V type AAA (batteries not included)
- Dimensions of main unit: (W × H × D) 80 × 161 × 23 mm
- Weight of main unit: 165 g

Forecast

SWS 2999
WEATHER STATION

- Weather station with wireless sensor
- Weather forecast icon (sunny, slightly cloudy, cloudy, rain, snow)
- Indoor temperature and humidity reading
- Outdoor temperature and humidity reading
- Recording of max./min. values to memory
- Indoor temperature range: 0°C to +50°C
- Outdoor temperature range: -20°C to +60°C
- Humidity range: 20% to 95% RH
- Temperature display with °C/°F selection
- Digital time and date
- 12/24 hour format
- On-screen touch buttons
- LCD display with brief white backlight
- Low battery indicator
- Table or wall installation possible
- Option to connect up to three sensors
- 1 sensor included (SWS TH2850-2999-3851-5150)
- Long-distance transmission between the main unit and the sensor: up to 50 m (in open space)
- Sensor transmission frequency: 433.92MHz
- Power supply: 3 x 1.5 V type AAA (batteries not included)
- Sensor power supply: 2 × 1.5 V type AA (batteries not included)
- Dimensions of main unit: (W × H × D) 142 × 98 × 22 mm
- Weight of main unit: 160 g
- Dimensions of wireless sensor: (W × H × D) 39 × 100 × 23 mm
- Weight of wireless sensor: 33 g

Forecast

○ SWS 2850
WEATHER STATION

- Weather station with wireless sensor
- Weather forecast icon (sunny, slightly cloudy, cloudy, rain, snow)
- Indoor temperature and humidity reading
- Outdoor temperature and humidity reading
- Recording of max./min. values to memory
- Indoor temperature range: 0°C to +50°C
- Outdoor temperature range: -20°C to +60°C
- Humidity range: 20% to 95% RH
- Temperature display with °C/°F selection
- Digital time and date
- 12/24 hour format
- Snooze function
- On-screen touch buttons
- LCD display with brief white backlight
- 3 display brightness levels: high/low/off
- Low battery indicator
- Table or wall installation possible
- Option to connect up to three sensors
- Option to automatically rotate the readings from all three sensors
- 1 sensor included (SWS TH2850-2999-3851-5150)
- Long-distance transmission between the main unit and the sensor: up to 50 m (in open space)
- Sensor transmission frequency: 433.92MHz
- Power supply: 3 x 1.5 V type AAA (batteries not included)
- Sensor power supply: 2 × 1.5 V type AA (batteries not included)
- Dimensions of main unit: (W × H × D) 142 × 92 × 25 mm
- Weight of main unit: 151 g
- Dimensions of wireless sensor: (W × H × D) 39 × 100 × 23 mm
- Weight of wireless sensor: 33 g

Forecast

● SWS 25 BS
○ SWS 25 WS
THERMOMETER

- Thermometer with wireless temperature sensor
- Time display
- 12/24 hour mode
- Indoor temperature, outdoor temperature
- Indoor temperature range: -9°C to +50°C
- Outdoor temperature range: -30°C to +55°C
- Measurement accuracy: +1.5°C
- Outdoor temperature trend
- Minimum and maximum temperature recording
- Option to connect a single sensor only
- Transmission frequency: 433MHz
- Range: up to 30 m in an open area
- Thermometer power supply: 2 x 1.5V, type AAA (batteries not included)
- Thermometer dimensions: 76 × 36 × 106 mm
- Weight: 75 g
- Sensor power supply: 2 x 1.5 V type AAA (batteries not included)
- Sensor dimensions: 60 × 27 × 96 mm
- Weight: 53 g

○ SWS 1918
THERMOMETER

- Thermometer with alarm clock
- Indoor temperature reading
- Temperature trend indicator
- Indoor temperature range: -10°C to +50°C
- Temperature display with °C/°F selection
- Waking up with buzzer
- Snooze function
- 12/24 hour format
- LCD display with brief white backlight
- On-screen touch buttons
- Digital time, date and week day
- Low battery indicator
- Table or wall installation possible
- Battery power supply: 2 x 1.5 V type AAA (batteries not included)
- Dimensions of main unit: (W × H × D) 85 × 110 × 23 mm
- Weight of main unit: 108 g

● SWS 1500 B
○ SWS 1500 W
THERMOMETER

- Thermometer with clock and alarm
- Indoor temperature and humidity reading
- LCD display with brief white backlight
- Digital time display
- 12/24 hour format, calendar
- Waking up with buzzer
- Snooze function
- Temperature display with °C/°F selection
- Indoor temperature: 0°C to +50°C
- Indoor humidity: 20 % to 90 %
- Recording of min./max. temperature and humidity
- Power supply: 1 × 1.5 V type AA (batteries not included)
- Dimensions: 93 × 94 × 38 mm
- Weight: 101 g

SENCOR®

Digital Alarm Clock

With Quick Wireless Charger And Color Backlight

SDC 7900 Qi

- 10W Qi Fast Wireless Charger
- USB Charging Port: 5 V / 1 A
- Design Color Backlight
- Touch Control

SDC 7900 Qi

Qi CLOCK WITH CHARGER

- Digital alarm clock with fast wireless charger and colour backlight
- Qi 10W wireless fast charger
- USB charger: 5 V / 1 A
- Large 12 cm (4,7") display
- Design colour backlight (10 colour modes)
- RGB mode function - RGB colour blending
- 12/24-hour time display
- Dual alarm
- Snooze function
- 4 display brightness levels: High / Medium / Low / Automatic
- Automatic brightness - adjust the display brightness according to the time of day
- Touch controls
- Key lock function
- Rubberised surface
- Table installation
- Package contents: USB power adapter, USB-C cable, user manual
- QC3.0/QC2.0 power adapter: DC 9V/2A, 12V/1.5A/ 5V/3A (included)
- Maximum wireless charging power: 10W
- USB-C input, USB-A output
- Power consumption: < 18W
- Backup battery: 1 × CR-2032 3 V (included)
- Dimensions: 141 × 74 × 117 mm (W × H × D)
- Weight: 220 g (including battery, without adapter)

○ SDC 120
DIGITAL ALARM CLOCK

- Alarm clock
- Large blue curved LED display (4.7 cm)
- Digital time display, dual alarm
- Alarm with increasing volume, Snooze function
- Display brightness setting – 2 levels or off
- Back-up battery 1 × 3 V type CR-2032 (not included)
- Power supply: DC 5 V/ 300 mA power source (included)
- Power consumption: 1W
- Dimensions: 171 × 87 × 40 mm
- Weight: 140 g

● SDC 4800 B
DIGITAL ALARM CLOCK

DCF Signal
color display

- Digital clock with alarm and USB charger
- Colour display with 3.4" diagonal (8.6 cm)
- 3 display brightness levels: high/low/off
- Clock controlled via radio and DCF77 signal (manual setting possible)
- Displays time, indoor temperature and date
- Indoor temperature (°C/°F)
- 12/ 24-hour time display, calendar
- Alarm: waking up with buzzer
- Snooze function
- Date and week day (week day in 8 languages: EN /IT/ES/DE/FR/NE/DA/RU)
- Table installation
- Power adapter: DC 4.5 V / 150 mA (included)
- Power consumption: 0.45W
- Backup battery: 1 × CR-2032 3 V (included)
- Dimensions: 105 × 57 × 29 mm (W × H × D)
- Weight: 117 g (including battery, without adapter)

○ SDC 4400
DIGITAL ALARM CLOCK

- Alarm clock with LED night light
- USB charger: 5 V / 1000 mA
- LED night light
- Amber 2.3 cm LED display (0.9")
- Display brightness setting
- Dual alarm
- Waking up with buzzer
- Snooze function
- CR-2032 back-up battery for clock 1 × 3 V (not included)
- Power supply: AC 100–240 V, 50/60 Hz
- Dimensions: (W × H × D) 135 × 68 × 60 mm
- Weight: 260 g (including AC/DC adapter)

USB for charging

● SDC 2800 B
○ SDC 2800 W
DIGITAL ALARM CLOCK

- Digital clock with alarm and USB charger
- LCD display with brief white backlight
- Nigh light function (low intensity all-night backlight)
- Digital time display
- 12/24 hour format
- Calendar, day indication in 7 languages
- Waking up with buzzer
- Dual alarm, Snooze function
- Indoor temperature: 0°C to +50°C
- Temperature display with °C/°F selection
- Table installation
- Power supply: 2 x 1.5 V type AAA (batteries not included)
- Dimensions: (W × H × D) 129 × 67 × 40 mm
- Weight: 137 g

● SDC 1200 B
○ SDC 1200 W
DIGITAL ALARM CLOCK

- Alarm clock with thermometer
- Radio-controlled clock, DCF77 signal
- LCD display with brief white backlight
- Digital time display
- 12/24 hour format
- Calendar, day indication in 7 languages
- Waking up with buzzer
- Snooze function (5 minutes)
- Indoor temperature: 0°C to +60°C
- Temperature display with °C/°F selection
- Power supply: 2 x 1.5 V type AAA (batteries not included)
- Dimensions: (W × H × D) 78 × 78 × 30 mm
- Weight: 72 g

DCF Signal

SWD 112
WIRELESS DOORBELL

- Digital wireless doorbell
- Digital wireless doorbell consisting of a bell and two buttons
- 48 tunes
- Transmission frequency: 433 MHz
- Button with IP44 protection
- Range in open space without electromagnetic interference: up to 150 m
- LED indication on bell and button
- Power supply 230 V~ 50 Hz
- Button power supply: 1 × LR23A (included)
- Power consumption 3 W:
- Doorbell dimensions: 90 × 80 × 23 mm
- Weight: 95 g
- Button dimensions: 85 × 40 × 21 mm
- Weight: 35 g

IP44

SWD 110
WIRELESS DOORBELL

- Digital wireless doorbell
- Digital wireless doorbell consisting of a bell and a button
- 48 tunes
- Transmission frequency: 433 MHz
- Button with IP44 protection
- Range in open space without electromagnetic interference: up to 150 m
- LED indication on bell and button
- Power supply 230 V~ 50 Hz
- Button power supply: 1 × LR23A (included)
- Power consumption 3 W:
- Doorbell dimensions: 90 × 80 × 23 mm
- Weight: 95 g
- Button dimensions: 85 × 40 × 21 mm
- Weight: 35 g

IP44

SWD 100
WIRELESS DOORBELL

- Digital wireless doorbell
- Digital wireless doorbell consisting of a bell and a button
- 48 tunes
- Transmission frequency: 433 MHz
- Button with IP44 protection
- Range in open space without electromagnetic interference: up to 150 m
- LED indication on bell and button
- Doorbell power supply: 3 × 1.5 V, type AAA
- Button power supply: 1 × LR23A (included)
- Power consumption: 80 mW
- Doorbell dimensions: 89 × 81 × 24 mm
- Weight: 75 g
- Button dimensions: 85 × 40 × 21 mm
- Weight: 35 g

IP44

DIGITAL PHOTO FRAMES

● SDF 1091 B
○ SDF 1091 W
WI-FI DIGITAL PHOTO FRAME

- 10.1" (25.6 cm) IPS touch screen
- High resolution: 1280 × 800 pixels
- Wide viewing angles bright colours
- Connectivity: Wi-Fi, MicroSD (SDHC / SDXC)
- 4.6 GB internal memory
- Free application for iOS & Android (FRAMEO)
- Direct transfer of photos and videos to the photo frame from a smartphone
- Display photos and videos from friends and family from all around the world in a few seconds
- Multiple language support, including Czech
- Import photos from / save or back up to micro SD card
- Label viewing on display
- Automatic shut down time setting
- Adjustable slideshow interval
- Adjustable brightness
- Vertical/horizontal stand
- Optional wall installation
- Speaker: 1 W
- Power adapter: 100–240 V 50/60 HZ, 0.3 A; = 5 V / 2 A
- Dimensions: 266×186×20 mm (W × H × D)
- Weight: 0.52 kg

● SDF 1771
DIGITAL PHOTO FRAME

- Digital photo frame
- 17.1" (43.4 cm) 16:9 TFT LED display
- High resolution: 1280 × 800 pixels
- Card reader (SD/SDHC/MMC).
- USB 2.0
- Speaker: 2×2W
- Menu in EN, CZ, SK, HU, PL, ES, IT, FR, DE, RS, EL
- Video formats: FLV, MP4, AVI, MKV, MOV,RMVB
- Audio formats: MP3, FLAC, APE
- Image formats: JPG, PNG, BMP
- Slideshow
- Adjustable slideshow interval
- Automatic video/photo/music playback
- Calendar/clock/alarm/timer
- Adjustable brightness
- Remote control
- Headphone connector
- Optional wall installation: VESA 75 × 75 mm
- Stand
- Power adapter: 100–240 V /12 V 1.5A
- Dimensions: 418×282×31mm (W × H × D)
- Weight: 2.0 kg

● SDF 1571
DIGITAL PHOTO FRAME

- 15.4" (39 cm), 16:9 TFT LED display
- High resolution: 1280 × 800 pixels
- Card reader (SD/SDHC/MMC)
- USB 2.0
- Speaker: 2×2W
- Menu in EN, CZ, SK, HU, PL, ES, IT, FR, DE, RS, EL
- Video formats: FLV, MP4, AVI, MKV, MOV,RMVB
- Audio formats: MP3, FLAC, APE
- Image formats: JPG, PNG, BMP
- Slideshow
- Adjustable slideshow interval
- Automatic video/photo/music playback
- Calendar/clock/alarm/timer
- Adjustable brightness
- Remote control
- Headphone connector
- Optional wall installation: VESA 75 × 75 mm
- Stand
- Power adapter: 100–240 V /12 V 1.5A
- Dimensions: 362×244×26mm (W × H × D)
- Weight: 1.5 kg

SDF 1371
DIGITAL PHOTO FRAME

- 13.3 display" (33.8 cm) 16:9 TFT LED
- High resolution: 1280 × 800 pixels
- Card reader (SD/SDHC/MMC).
- USB 2.0
- Speaker: 2×2W
- Menu in EN, CZ, SK, HU, PL, ES, IT, FR, DE, RS, PT, TR, NL, DK
- Video formats: 720P RMVB MPEG1 (VCD, SVCD), MPEG2 (DVD), MPEG4 (DIVX,AVI)
- Audio formats: MP3, WMA
- Image formats: JPEG, PNG
- Slideshow
- Adjustable slideshow interval
- Automatic video/photo/music playback
- Calendar/clock/alarm/timer
- Adjustable brightness
- Remote control
- Headphone connector
- Optional wall installation: VESA 75 × 75 mm
- Stand
- Power adapter: 100–240 V /12 V 1 A
- Dimensions: 318 × 224 × 25mm (W × H × D)
- Weight: 1.1 kg

USB SDHC

SDF 1271
DIGITAL PHOTO FRAME

- Digital photo frame
- 12.1" (30.7 cm) 16:9 TFT LED display
- High resolution: 1280 × 800 pixels
- Card reader (SD/SDHC/MMC)
- USB 2.0
- Speaker: 2 × 2 W
- Menu in CZ, SK, HU, PL, EN
- Video formats: 720P RMVB MPEG1 (VCD, SVCD), MPEG2 (DVD), MPEG4 (DIVX,AVI)
- Audio formats: MP3, WMA
- Image formats: JPEG
- Slideshow
- Adjustable slideshow interval
- Calendar/clock/alarm/timer
- Adjustable brightness, volume control
- Headphone connector, stand
- Optional wall installation: VESA 100 × 100 mm
- Power adapter: 100–240 V / 12 V 1 A
- Dimensions: 298 × 200 × 24mm (W × H × D)

USB SDHC

SDF 1081 B
SDF 1081 W
DIGITAL PHOTO FRAME

- IPS screen 10.1 inches (25.7 cm) 16: 9
- High resolution: 1366 × 768 pixels
- Wide viewing angles bright colours
- Card reader (SD/SDHC/MMC /).
- USB 2.0 support
- Built-in speaker 2W
- Menu in CZ, DE, EN, ES, FR, GR, HR, HU, PL, PT, RS, RU, SK
- Video player format: MKV, MOV, AVI, MP4
- Audio player format: MP3, WMA
- Image formats: JPEG, BMP
- Slideshow of photos/images
- Adjustable slideshow interval
- Automatic video/photo/music playback
- Calendar/clock/alarm/timer
- Adjustable brightness/contrast/saturation
- Remote control; Desk stand; Wall mountable
- Power adapter: 100 -240 V 100/–240 V /5 V 2 A
- Dimensions: 256 × 166 × 25 mm (W × H × D)
- Weight: 0.6 kg

USB SDHC

DIGITAL PHOTO FRAMES

● SDF 1080 B
○ SDF 1080 W

DIGITAL PHOTO FRAME

- Digital photo frame
- 10.1" (25.7 cm) 16:9 TFT LED display
- High resolution: 1024 × 600 pixels
- Wide viewing angles bright colours
- Card reader (SD/SDHC/MMC).
- USB 2.0 support
- Speaker: 1 W
- Menu in CZ,DE,EN,ES,FR,GR,HR,HU,PL,PT,RS,RU,SK
- Video formats: MPEG1/2/4, AVI, M-JPEG
- Audio formats: MP3
- Image formats: JPEG, PNG
- Slideshow
- Adjustable slideshow interval
- Automatic video/photo/music playback
- Calendar/clock/alarm/timer
- Adjustable brightness/contrast/saturation
- Remote control
- Headphone connector
- Optional attachment: VESA 75 × 75 mm
- Stand
- Power adapter: 100–240 V 50/60 HZ, 0.3 A; = 5.0V / 1.2A
- Dimensions: 250×160×22 mm (W × H × D)
- Weight: 0.6 kg

SDHC

● SDF 782 B
○ SDF 782 W

DIGITAL PHOTO FRAME

- 7" (17.8 cm) 16:9 TFT LED display
- High resolution: 1024 × 600 pixels
- Wide viewing angles bright colours
- Card reader (SD/SDHC/MMC).
- USB 2.0 support
- Speaker: 1 × 2 W
- Menu in CZ,DE,EN,ES,FR,GR,HR,HU,IT,NL,PL,PT,RO,RS,RU,SK,SV,TR
- Video formats: 720P RMVB MPEG1 (VCD, SVCD), MPEG2 (DVD), MPEG4 (DIVX,AVI)
- Audio formats: MP3, WMA
- Image formats: JPEG, PNG
- Slideshow
- Adjustable slideshow interval
- Automatic video/photo/music playback
- Calendar/clock/alarm/timer
- Adjustable brightness/contrast/saturation
- Remote control
- Headphone connector
- Optional attachment: VESA 75 × 75 mm
- Stand
- Power adapter: 100–240 V 50/60 HZ, 0.3 A; = 5 V / 1.5 A
- Dimensions: 180 × 126 × 24mm (W × H × D)
- Weight: 0.5 kg

USB SDHC

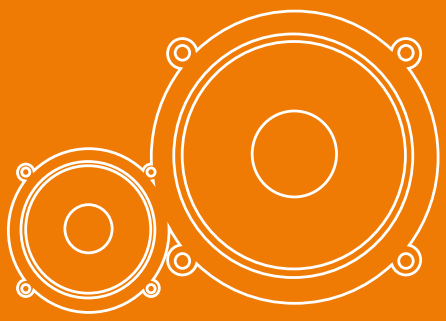

Car accessories

68 CAR CAMERAS
69 CAR RADIOS
71 SUBWOOFERS
72 SPEAKERS
73 PARKING SYSTEMS
74 CAR CHARGERS
76 ALCOHOL TESTERS
78 FM MODULATORS

SCR 5000GS
CAR CAMERA

- Built-in GPS module
- Small and compact body
- STARLIGHT Vision
- 170° viewing angle
- Display: 1.5" LCD

Image resolution:
- 1728 × 1296 (interpolated, 30 fps)
- 1920 × 1080 (1080P, 30 fps)
- 1280 × 720 (720P, 30 fps)

Photo:
JPEG – 12M, 10M, 8M, 5M, 3M, 2M, 1.3M, VGA

Others:
- Parking monitor
- Loop recording
- Motion detection
- G-sensor
- Multilingual OSD
- Storage: MicroSD card up to 128 GB (not included)
- Battery: built-in 3.7 V / 180 mAh Li-Ion
- Mini USB port
- Dimensions: 55 × 47.5 × 41 mm
- Accessories: car mount, car charger, USB cable, instruction manual

HD

SCR 4400
CAR CAMERAS

- SONY image sensor
- Thin and compact body
- 170° viewing angle
- G-sensor
- Display: 3" LCD
- Start recording when a parked vehicle is hit
- Loop recording
- Motion detection

Image resolution:
- 3840 × 2160 (4K, 30 fps)
- 2688 × 1520 (2.7K, 30 fps)
- 1920 × 1080 (1080P, 30 fps)
- 1280 × 720 (720P, 30 fps)

Photo:
- JPEG - 14M, 12M, 10M, 8M

Others:
- Multilingual OSD
- Storage: MicroSD card up to 128 GB (not included)
- Battery: built-in 3.7 V / 180 mAh Li-Ion
- Mini USB port
- Dimensions: 89 × 54 × 34 mm
- Accessories: car mount, car charger, instruction manual

FHD

SCR 4200
CAR CAMERA

- Thin and compact body
- 170° viewing angle
- G-sensor
- Display: 3" LCD
- Parking monitor
- Loop recording
- Motion detection

Image resolution:
- 1920 × 1080 (1080P, 30 fps)
- 1280 × 720 (720P, 30 fps)
- 640×480 (VGA, 30 fps)

Photo:
- JPEG – 12M, 10M, 8M, 5M, 3M, 2M, 1.3M, VGA

Others:
- Multilingual OSD
- Storage: MicroSD card up to 32 GB (not included)
- Battery: built-in 3.7 V / 180 mAh Li-Ion
- Mini USB port
- Dimensions: 89 × 54 × 34 mm
- Accessories: car mount, car charger, USB cable, instruction manual

SCR 1100
CAR CAMERAS

- 120° viewing angle
- G-sensor
- Display: 2.2" LCD
- Recording when a parked vehicle is hit
- Loop recording
- Motion detection

Image resolution:
- 1920 × 1080 (1080P, 30 fps, interpolated)
- 1280 × 720 (720P, 30 fps)
- 640 × 480 (VGA, 30 fps)

Photo:
- JPEG - 8M, 5M, 3M, 2M, 1M

Others:
- Multilingual OSD
- Storage: Slot for MicroSD card up to 64 GB (not included)
- Battery: built-in 3.7 V / 180 mAh Li-Ion
- Mini USB port 2.0
- Dimensions: 70 × 65 × 30mm
- Accessories: car mount, car charger, instruction manual

SCT 9412DBMR

CAR RADIO WITH DAB+

Display
- 7" colour TFT LCD touch screen with wide aspect ratio (16:9)
- Fully motorised monitor control mechanism
- Resolution 800 × 480
- Automatic tilt and in/out adjustment

Playback modes
- DAB+ (Digital Audio Broadcasting)
- Digital PLL FM/AM tuner (18 presets for FM band, 12 presets for AM tuner)
- RDS (Radio Data System)
- PTY, AF, TA, PS

Sound
- Sound formats: MP3, WMA, OGG Vorbis, FLAC, APE, AAC, AC3, DTS, PCM, RA
- Output power: 4 × 40 W max
- Equalizer (Standard, Classic, Rock, Pop, Classic, Jazz, Electric)
- Bass and treble controls
- Balance and fader controls
- Supported video and image formats
- Video formats: MKV, AVI, MOV/MP4, ASF, FLV, RMVB, MPG/VOB, WMV, 3GP, DAT
- Image: JPEG, BMP, GIF, PNG, TIFF

Connectivity
- Bluetooth 2.1 A2DP (music and phone call transfer)
- USB connector (output power 1 A)
- SD/MMC card slot
- Front A/V input

Other
- Fully detachable front panel
- Adjustable backlight colour (green/blue/yellow/cyan/purple/white)
- Digital clock
- Input for rear camera
- Steering wheel button learning (SWC)
- External microphone input (Jack)
- RCA connectors - output (front and rear speakers)
- Subwoofer output
- ISO connector
- Remote control
- 12 V power supply (permissible range 11–14.4 V)

SCT 9411BMR

CAR RADIO

Display
- 7" colour TFT LCD touchscreen with wide aspect ratio (16:9)
- Fully motorised monitor control mechanism
- Resolution: 800 × 480
- Automatic tilt and in/out adjustment

Playback modes
- Digital PLL FM/AM tuner (18 presets for FM band, 12 presets for AM band)
- RDS (Radio Data System)
- PTY, AF, TA, PS

Sound
- Sound formats: MP3, WMA, OGG Vorbis, FLAC, APE, AAC, AC3, DTS, PCM, RA
- Output power: 4 × 40 W max
- Equalizer (Standard, Classic, Rock, Pop, Classic, Jazz, Electric)
- Bass and treble controls
- Balance and fader controls
- Supported video and image formats

Video formats: MKV, AVI, MOV/MP4, ASF, FLV, RMVB, MPG/VOB, WMV, 3GP, DAT

Image: JPEG, BMP, GIF, PNG, TIFF

Connectivity
- Bluetooth 2.1 A2DP (music and phone call transfer)
- USB connector (output power 1 A)
- SD/MMC card slot
- Front A/V input

Other
- Fully detachable front panel
- Adjustable backlight colour (green/blue/yellow/cyan/purple/white)
- Digital clock
- Input for rear camera
- Front and back RCA connector
- Subwoofer output
- ISO connector
- Remote control
- 12 V power supply (permissible range 11–14.4 V)

SCT 6011DBMR
CAR RADIO WITH DAB+

Features
- Fully detachable front panel
- Blue backlight
- Digital clock

Playback modes
- DAB+ (Digital Audio Broadcasting)
- Digital PLL FM/AM tuner (18 presets for FM band, 12 presets for AM tuner)
- RDS (Radio Data System)
- PTY, AF, TA, PS,CT

Sound
- MP3, WMA, FLAC, WAV, AAC
- Output power: 4 × 40 W max
- Equalizer (7 presets)
- Bass and treble controls
- Balance and fader controls
- Volume setting

Connectivity
- Bluetooth 2.1 A2DP (music and phone call transfer)
- USB connector (output power 1 A)
- SD/MMC card slot
- Front line input

Other
- Front and back RCA connector
- SMB antenna connector
- Built-in ISO connector

SCT 5051BMR
CAR RADIO

Features
- Fully detachable front panel
- Adjustable backlight colour (GREEN/BLUE/YELLOW/CYAN/PURPLE/WHITE)
- Digital clock

Playback modes
- Digital PLL FM/AM tuner (18 presets for FM band, 12 presets for AM tuner)
- RDS (Radio Data System)

Sound
- MP3, WMA, FLAC, WAV, AAC
- Output power: 4 × 40 W max
- 2-band equalizer (7 presets)
- Bass and treble controls
- Balance and fader controls
- Loudness

Connectivity
- Bluetooth 2.1 A2DP (music and phone call transfer)
- USB port
- SD/MMC card slot
- Front line input

Other
- Back RCA connector
- 2 V line output
- Built-in ISO connector
- 12 V power supply (permissible range 10.5–14.4 V)

SCT 5017BMR
CAR RADIO

- Integrated Bluetooth speaker with microphone
- MP3/WMA player
- USB/SD/MMC inputs
- Front line input
- Fully detachable front panel
- LCD display with scrolling text
- Radio Data System (RDS)
- 30 presets for AM/FM radio (18 for FM, 12 for AM)
- Preset equalizer curves
- Bass and treble controls
- Balance and fader controls
- Volume control

SCT 3018MR
CAR RADIO

- MP3/WMA player
- USB/SD/MMC inputs
- Front line input
- Fully detachable front panel
- LCD display with scrolling text
- Radio Data System (RDS)
- 30 presets for AM/FM radio (18 for FM, 12 for AM)
- Preset equalizer curves
- Bass and treble controls
- Balance and fader controls
- Volume control
- RCA line output
- Remote control
- Power output: 40 W × 4 k.
- ISO-DIN adapter

SCS WA 1203
SUBWOOFER

- 12" active subwoofer
- 300 mm black non-pressed paper cone
- High-quality NBR rubber edges
- Reinforced, high-quality round paper tube
- High performance amplifier with low distortion
- Subwoofer diameter 30 cm (12")
- Max. peak output power: 600 W
- Max. effective output power: 300 W
- THD < 0.5%< 0.5%
- Full frequency range: 25–3,000 Hz ± 1.0 dB
- Low pass: 50–500 Hz ± 1.5 dB
- Adjustable low pass filter
- Input sensitivity: 0.15–8 V
- Speaker impedance: 4 Ω
- Stereo RCA input connectors

600W 30 cm

SCS WA 1003
SUBWOOFER

- 10" black non-pressed paper cone
- High-quality NBR rubber edges
- Circular horn
- High performance amplifier with low distortion
- Loudspeaker diameter 25 cm (10")
- Max. peak output power: 400 W
- Max. effective output power: 120 W
- Full frequency range: 40–3,000 Hz± -1.0 dB
- Low pass: 50–250 Hz
- Adjustable low pass filter
- Adjustable phase shift: 0°–180°
- Adjustable volume
- Input sensitivity: 0.2–6 V
- Speaker impedance: 4 Ω
- Stereo RCA input connectors
- Dimensions (w×h×d): 450 x 288 x 306 mm
- Weight: 6.7 kg

400W 25 cm

SCS WA 6902
SPEAKER

86 dB

- 6" × 9" oval, dimensions: 165 × 235 mm
- 4-band coaxial
- Rubber membrane
- Coil diameter: 1.25" (30 mm), ASV
- Midrange speaker diameter: 58mm
- Treble speaker diameter: 2 × 15 mm
- Frequency range: 65–20000 Hz
- Sensitivity: 86 dB/W/m
- Impedance: 4
- Nominal output: 35 W
- Maximum power: 105 W
- Magnet dimensions: 100 × 60 × 18 mm
- Mounting depth: 80 mm

SCS WA 1602
SPEAKER

17 cm 85 dB

- 6.5" / 17 cm diameter
- 2-band coaxial
- Rubber membrane
- Coil diameter: 1" (25 mm), ASV
- Treble speaker diameter: 28mm
- Frequency range: 78–20000 Hz
- Sensitivity: 85 dB/W/m
- Impedance: 4
- Nominal output: 30 W
- Maximum power: 90 W
- Magnet dimensions: 80 × 40 × 15 mm

SCS WA 1302
SPEAKER

13 cm 84 dB

- 5.25" / 13 cm diameter
- 2-band coaxial
- Rubber membrane
- Coil diameter: 1" (25 mm), ASV
- Treble speaker diameter: 28mm
- Frequency range: 95–20000 Hz
- Sensitivity: 84 dB/W/m
- Impedance: 4
- Nominal output: 25 W
- Maximum power: 75 W
- Magnet dimensions: 70 × 32 × 10 mm

SCS WA 1002
SPEAKER

- 4" / 10 cm diameter
- 2-band coaxial
- Rubber membrane
- Coil diameter: 1" (25 mm), ASV
- Treble speaker diameter: 28mm
- Frequency range: 105–20000 Hz
- Sensitivity: 84 dB/W/m
- Impedance: 4
- Nominal output: 20 W
- Maximum power 60 W
- Magnet dimensions: 70 × 32 × 10 mm

SCA PARK200
PARKING SYSTEM

- Parking sensors
- 4 parking sensor system
- Shows distance from an obstacle on display
- Automatic activation on shifting into reverse
- Wireless connection between display and control box
- Sound/voice warning signal (attention /warning / stop)
- Obstacle detection from 0.3 to 2 m from the bumper
- Extra wide detection angle prevents side impact
- All-weather design (from –40 °C to +80 °C)
- Suitable for all car types

The package includes:

- 1 control module, 4 ultrasonic sensors (gloss black), 1 acoustic indicator, wireless LCD display, 1 power supply cable, 1 hole borer,1 accessory kit, 1 instruction manual

SCA PARK100
PARKING SYSTEM

- Parking sensors
- 4 parking sensor system with ultrasonic obstacle detection
- Parking sensor hole diameter: 2 cm
- Automatic activation on shifting into reverse
- 3-phase alarm: sound signal (interval decreases with decreasing distance to the obstacle)
- Adjustable volume: off, quiet, sound
- Obstacle detection from 150 cm to 80 mm from the bumper
- Extra wide detection angle prevents side impact
- Anti-false installation technology
- All-weather design (from –40 °C to +80 °C)
- High quality and easy installation
- Suitable for all car types

The package includes:

- 1 control box, 4 ultrasonic sensors (shiny black), 1 acoustic indicator, 1 power supply cable, 1 hole borer
- 1 accessory kit, 1 instruction manual

SCH 470
CAR CHARGER

Sound:
- This powerful charging station can charge up to seven devices simultaneously. It has three USB-A ports, one USB-C port and three 12V outputs. Power Delivery and Quick Charge 3.0 fast charging technologies are also supported. The power station can be used in both cars (12 V) and trucks (24 V). Protection against A6:B6 short circuit, overload, overheating and overcharging is a matter of course.
- Car power station for portable devices
- For simultaneous power supply for phones and tablets
- Power supply for car refrigerators and other devices B6B2A6:B6A6:B6
- PD (Power Delivery) support
- QC 3.0 (Quick Charge) support
- LED display

Connections
- 3× USB-A QC output (USB1, 2, 3)
- 1× USB-C PD output (USBC)
- 3×12V output

Specifications
- USB-A QC 3,0 -5 V / 3 A, 9 V / 2 A, 12 V / 1.5 A
  USB-C PD 20 W -5 V / 3 A, 9 V / 2,22 A, 12 V / 1,67 A
  DC 12 V - 120 W max. / DC 24 V - 200 W max.
- Max. USB 1 + USB 2 current: 3.1A (simultaneously)
- USB 3 + USB C current: 3.1A (simultaneously)

Display
- Battery voltage indicator (9V - 30V)
- Warning indication (flashing display)

Others
- 10A resettable fuse
- Short-circuit, overvoltage and overcurrent protection
- On/Off Button
- Power cord length: 70 cm

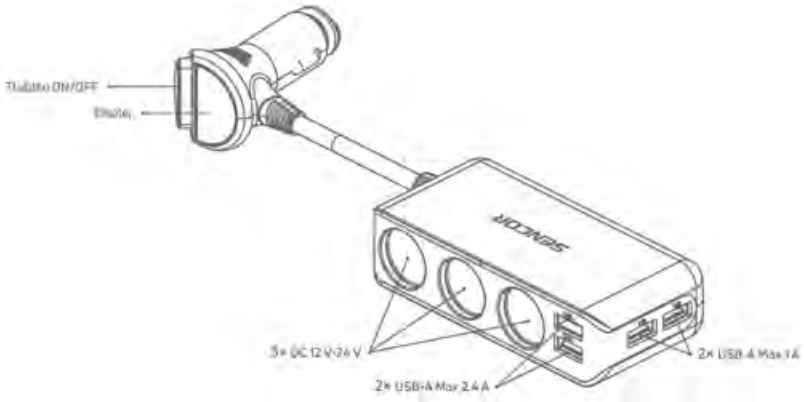

SCH 450
CAR CHARGER

Features:
- This powerful charging station can charge up to seven devices simultaneously. It has four USB-A ports and three 12V outputs. Two USB ports support charging up to 2.4A. The charging station can be used in both cars (12 V) and trucks (24 V). Protection against short circuit, overload, overheating and overcharging is a matter of course.
- Car power station for portable devices
- For simultaneous power supply for phones and tablets
- Power supply for car refrigerators and other devices
- LED display

Charging
- 4× USB-A output
- 3×12V output

Specifications
- 2× USB-A -5 V / 2.4 A
- 2× USB- A - 5 V / 1 A
- DC 12 V - 120 W max. / DC 24 V - 200 W max.
- Maximum USB output current 5V / 4A (simultaneously)

Display
- Battery voltage indicator (9V - 30V)
- Warning indication (flashing display)

Others
- 8 A disposable fuse
- Short-circuit, overvoltage and overcurrent protection
- On/Off Button
- Power cord length: 100 cm

SCH 440
CAR CHARGER

- Car USB adapter and triple socket
- USB power supply: 5 V / 500 mA
- Power supply for mobile phone, PDA, MP3 player etc.
- Triple socket 12 V/5 A (total max.)
- 5 A fuse
- Cigarette lighter plug with cord
- Cable length: 50cm

SCA INV140
VOLTAGE CONVERTER FOR CAR

- Continuous power 140 W, maximum power 280 W
- Input voltage: 12 V DC
- Output voltage 220–240 V AC.
- Low and high input voltage protection
- Overload protection
- Short circuit protection
- Output voltage: modified sine wave
- Product dimensions: 134 × 57 × 68 mm

SCA BA50
ALCOHOL TESTER

- Alcohol tester with electrochemical sensor (fuel cell)
- Displays alcohol concentration in blood
- Professional pre-calibrated sensor
- Automatic self-cleaning
- Digital LCD display with two colour backlight
- Acoustic and visual signalisation
- Measuring range: 0.00–4.00‰ BAC (blood alcohol concentration)
- Units of measurement: ‰ BAC (per mille blood alcohol concentration)
- Resolution: 0.01‰ BAC
- Alarm at alcohol concentration > 0.2‰ BAC
- Accuracy: better than ±0.08‰ BAC at alarm value
- Memory: 20 measurements
- Measurement duration: 5–7 s
- Automatic shut down: 30 s (display), 2 minutes (device)
- Power supply: built-in rechargeable Li-Ion battery 3.7 V 250 mAh
- Device dimensions (H × W × D): 110 × 53 × 19 mm
- Device weight: 82 g
- Accessories: 2 mouthpieces, USB cable, user's manual

Fuel cell

SCA BA 02
ALCOHOL TESTER

- Alcohol tester
- Displays alcohol concentration in breath
- Measuring range: 0,1–1,5‰ ("LO"< 0,2‰)
- Alarm trigger: > 0.2‰
- Units of measurement: ‰ (or %BAC or mg/l; optional)
- Digital LCD display with two colour backlight
- Acoustic and visual signalisation
- Automatic self-cleaning
- Low energy consumption
- Accessories: 3 blowing tubes
- Device dimensions (W × H × D): 43 × 105 × 23 mm
- Device weight: 50 g (without battery)

SCA BA 01 V2
ALCOHOL TESTER

- Alcohol analyser
- Displays alcohol concentration in breath
- Measuring range: 0.1–4‰
- Alarm trigger: > 0.2‰
- Units of measurement: ‰ (or %BAC or mg/l; optional)
- Digital LCD display with two colour backlight
- Easy control with a single button
- Acoustic and visual signalisation
- Automatic self-cleaning
- Low energy consumption
- Accessories: 3 blowing tubes
- Device dimensions (W × H × D): 36 × 98 × 16 mm
- Device weight: 27 g (without battery)

SCA BA 01
ALCOHOL TESTER

- Alcohol analyser
- Displays alcohol concentration in breath
- Measuring range: 0.1–1.5‰
- Alarm trigger: > 0.2‰
- Units of measurement: ‰ (or %BAC or mg/l; optional)
- Digital LCD display with two colour backlight
- Easy control with a single button
- Acoustic and visual signalisation
- Automatic self-cleaning
- Low energy consumption
- Accessories: 3 blowing tubes
- Device dimensions (W × H × D): 36 × 98 × 16 mm
- Device weight: 27 g (without battery)

SCA BA99
SCA BA89
REPLACEMENT BLOWING TUBES

- Blowing tubes
- For the following SENCOR alcohol testers:
- SCA BA01
- SCA BA02
- Number of tubes: 3 pcs
- Dimensions: 100 × 6 mm

SCA BA50FC
INTERCHANGEABLE SENSOR FOR ALCOHOL TESTER

- Replaceable pre-calibrated sensor for SCA BA50FC

SWM 5858
FM MODULATOR

- Car BT / MP3 FM modulator with QC3.0 quick charger
- Multi-colour TFT LCD display with 1.85" (4.7 cm) diagonal
- High-gloss black surface
- Connectivity: Bluetooth, USB flash drive, TF card, AUX-IN, MP3, WMA, FLAC, WAV and hands-free
- 3 USB connectors (1 for QC3.0 charger, 1 for quick charger) and 1 for music)
- QC3.0 quick charge port
- 2 charging USB ports: DC 5V / 5.4A max. (QC3.0 + 2.4 A)
- MicroSD /TF card slot (supported capacity up to 32 GB)
- Bluetooth V4.2
- Aux input for connecting external devices: 3.5 mm jack
- Wireless hands-free support
- Built-in microphone for calls
- Supports call answering through car stereo
- Displays volume, FM frequency, car voltage, track names, caller identification
- Equalizer (normal, classic, pop, rock, jazz)
- Volume control
- Pause, previous/next functions
- Memory for last frequency, track number and volume
- Easy switching between audio signal sources: BT/TF/AUX-IN/USB
- Voltage meter in car power supply system
- Adjustable arm for easy use
- 3.5 mm jack – 3.5 mm jack M/M cable (included)
- FM transmission frequency range: 87,5 – 108 MHz
- Number of FM frequencies: 206
- Power supply: DC 12 / 24 V (car cigarette lighter)
- Dimensions: (W × H × D) 52 × 79 × 180 mm
- Weight: 97 g

USB FM

SWM 4848
FM MODULATOR

- Car BT / MP3 FM modulator with QC3.0 quick charger
- Exclusive pearl metal coating
- Design LED lighting
- Connectivity: Bluetooth, USB flash drive, TF card, MP3, WMA, FLAC, WAV and hands-free
- 2 USB connectors (1 for QC3.0 charger, 1 for music)
- QC3.0 quick charge port
- USB charging ports: DC 5V / 4A max. (QC3.0 + 1.0 A)
- MicroSD /TF card slot (supported capacity up to 32 GB)
- Bluetooth V5.0
- Wireless hands-free support
- Built-in microphone for calls
- Supports call answering through car stereo
- Volume control
- Pause, previous/next functions
- Memory for last frequency, track number and volume
- Easy switching between audio signal sources: BT/TF/USB
- Blue LED display
- Digital tuning and frequency display
- Voltage meter in car power supply system
- FM transmission frequency range: 87,5 – 108 MHz
- Number of FM frequencies: 206
- Power supply: DC 12 / 24 V (car cigarette lighter)
- Dimensions: (W × H × D) 43 × 83 × 47 mm
- Weight: 39 g

USB FM

SWM 4545
FM MODULATOR

- Car BT / MP3 FM modulator
- Connectivity: Bluetooth, USB flash drive, TF card, MP3, WMA, FLAC, WAV and hands-free
- 2 USB connectors (1 for MP3 music, 1 main for charging)
- MicroSD /TF card slot (supported capacity up to 32 GB)
- Bluetooth V4.2
- Wireless hands-free support
- USB charging ports: DC 5V / 2.4A max.
- Built-in microphone for calls
- Supports call answering through car stereo
- Volume control
- Pause, previous/next functions
- Memory for last frequency, track number and volume
- Easy switching between audio signal sources: BT/TF/USB
- Blue anti-dazzle LED display
- Digital tuning and frequency display
- Voltage meter in car power supply system
- FM transmission frequency range: 87,5 – 108 MHz
- Number of FM frequencies: 206
- Power supply: DC 12 / 24 V (car cigarette lighter)
- Dimensions: (W × H × D) 47 × 80 × 40 mm
- Weight: 35 g

SWM 3535
FM MODULATOR

- Car BT / MP3 FM modulator
- Connectivity: Bluetooth, USB flash drive, TF card, MP3, WMA, FLAC, WAV and hands-free
- 2 USB connectors (1 for MP3 music, 1 main for charging)
- MicroSD /TF card slot (supported capacity up to 32 GB)
- Bluetooth V4.2
- Wireless hands-free support
- USB charging ports: DC 5V / 2.4A max.
- Built-in microphone for calls
- Supports call answering through car stereo
- Volume control
- Pause, previous/next functions
- Memory for last frequency, track number and volume
- Yellow anti-dazzle LED display
- Digital tuning and frequency display
- Voltage meter in car power supply system
- FM transmission frequency range: 87,5 – 108 MHz
- Number of FM frequencies: 206
- Power supply: DC 12 / 24 V (car cigarette lighter)
- Dimensions: (W × H × D) 38 × 70 × 48 mm
- Weight: 27 g

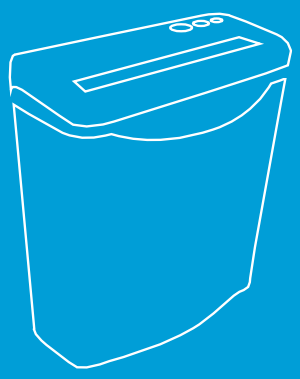

Office

81 SHREDDERS
82 TRIMMERS
83 LAMINATORS

SLL 482
SHREDDER

- CD, paper and credit card shredder
- Longitudinal and cross cut of up to 10 sheets (80 g/m²)
- Shred size: 5 × 16 mm
- Security level: 4
- Automatic start/stop
- Reverse movement for clearing paper jams
- Entry width: 220 mm
- Noise level: less than 70 dB
- Cutting speed: 2 m / min
- Shreds CDs/DVDs into 4 stripes
- 4 functional lockable wheels
- Bin with easy slide out
- Bin volume: 14 litres
- Power supply: AC 220–240 V / 300 W
- Dimensions: 344 × 210 × 445 mm
- Weight: approx. 5.4 kg

SLL 361
SHREDDER

- Paper shredder with cross section
- Security level: 3
- Longitudinal and cross cut of up to 6 sheets (80 g/m²)
- Automatic start/stop/reverse
- Shred size: 5 × 38 mm
- Entry width: 220 mm
- Noise level: less than 70 dB
- Cutting speed: 2.2 m / min
- Overheat protection
- Bin volume: 11 litres
- Power supply: AC 230 V/ 150 W
- Dimensions: 293 × 150 × 350 mm
- Weight: approx. 3.3 kg

SLL 160
SHREDDER

- Longitudinal cut of up to 6 sheets (80 g/m²)
- Security level: 2
- Automatic start/stop/reverse
- Strip size: 6 mm
- Entry width: 220 mm
- Noise level: less than 70 dB
- Cutting speed: 2.2 m / min
- Paper bin volume: 7 l
- Power supply: 220–240 V / 50 Hz; 190 W / 1 A
- Dimensions: 312 × 118 × 386 mm
- Weight: 1.4 kg

SSK 151
PAPER SHREDDER

- Destroys confidential documents easily and quickly
- Longitudinal cut of up to 5 sheets (80 g/m²)
- Automatic start/stop
- Reverse movement for clearing paper jams
- Strip size: 7 mm
- Entry width: 218 mm
- Noise level: less than 74 dB
- Cutting speed: 2.5 m / min
- Paper bin volume: 7 l
- Power supply: 220–240 V / 50 Hz; 0.6 A
- Dimensions: 310 × 125 × 270 mm
- Weight: 1.25 kg

TRIMMERS

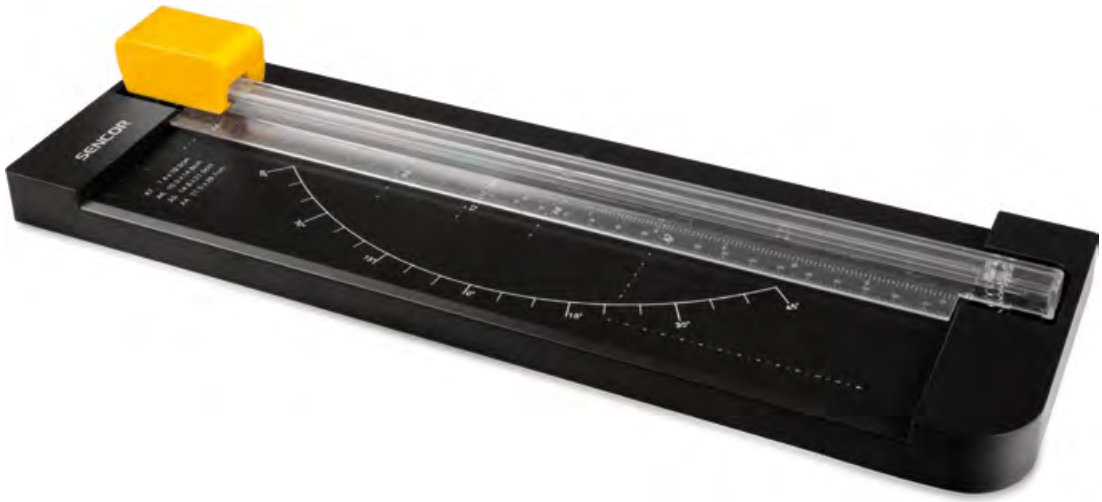

STR 210
TRIMMER

- Personal A4 paper trimmer
- Cut length: 310 mm
- 3 cutting blades: straight/perforation/wave
- Straight cut of up to 5 sheets
- Perforation cut of up to 3 sheets
- Wave cut of up to 3 sheets
- Dimensions: 382 × 120 × 55 mm

Ideal for:
- Trimming of PC prints, photos, business card, labels, posters etc.
- Create your own cards, labels and invitation cards
- Adult supervision required for children between 12 and 16 year of age Not suitable for children under 12 years of age

SLA 250
A4 LAMINATOR WITH TRIMMER AND PUNCH

- A4 laminator with trimmer and punch
- Laminates documents and photos up to A4 size
- For 150–250 micron pouches (2 × 75 – 2 × 125)
- Quick warm-up: 3–5 minutes
- Entry width: 230mm
- Quiet twin-roller feed mechanism
- ABS – quick release of jammed pouches
- Laminating speed: approx. 300 mm/min
- Maximum thickness (laminator/trimmer/punch): 0.3mm
- Power supply: 230 V / 0.55 A; 100 W
- Dimensions: 380×140×75mm
- Weight: 1.1 kg

Ideal for laminating:
- Certificates
- Images
- Documents
- Drawings
- PC prints
- Invitation cards
- Photos
- Calendars
- Maps

SLA 310
LAMINATOR

- Personal A3 laminator
- Laminates documents and photos up to A3 size
- For 150–250 micron pouches (2 × 75 – 2 × 125)
- Quick warm-up: 4–5 minutes
- Easy to use
- Uses 50% less energy*
- Quiet twin-roller feed mechanism
- ABS – quick release of jammed pouches
- Laminating speed: approx. 300 mm/min
- Hot and cold laminating
- Dimensions: 475 x 164 x 68 mm
- Weight: 1.5 kg

*Compared to conventional laminators

Ideal for laminating:
- Certificates
- Images
- Documents
- Drawings
- PC prints
- Invitation cards
- Photos
- Calendars
- Maps

SLA 302
PERSONAL LAMINATOR

- Laminates documents and photos up to A3 size
- Hot laminating
- Entry width: 330mm
- For 150–250 micron pouches (2 × 75 – 2 × 125)
- Quick warm-up: 2–4 minutes
- Easy to use
- Stand-by indicator
- Quiet twin-roller feed mechanism
- Laminating speed: approx. 300 mm/min
- Power supply: 230 V / 0.55 A; 160 W
- Dimensions: 430 x 110 x 66 mm
- Weight: 1.2 kg

Ideal for laminating:
- Certificates
- Images
- Documents
- Drawings
- PC prints
- Invitation cards
- Photos
- Calendars
- Maps

SLA 301
LAMINATOR

- Personal A3 laminator
- Laminates documents and photos up to A3 size
- For 150–250 micron pouches (2 × 75 – 2 × 125)
- Quick warm-up: 3–5 minutes
- Easy to use
- Uses 50% less energy*
- Quiet twin-roller feed mechanism
- ABS – quick release of jammed pouches
- Laminating speed: approx. 250 mm/min
- Hot and cold laminating
- Dimensions: 440 x 145 x 63 mm
- Weight: 1.6 kg

*Compared to conventional laminators

Ideal for laminating:
- Certificates
- Images
- Documents
- Drawings
- PC prints
- Invitation cards
- Photos
- Calendars
- Maps

SLA 210
LAMINATOR

- Personal A4 laminator
- Laminates documents and photos up to A4 size
- For 150–250 micron pouches (2 × 75 – 2 × 125)
- Quick warm-up: 3–4 minutes
- Easy to use
- Uses 50% less energy*
- Quiet twin-roller feed mechanism
- ABS – quick release of jammed pouches
- Laminating speed: approx. 300 mm/min
- Hot and cold laminating
- Dimensions: 330 x 190 x 57 mm
- Weight: 0.83 kg

*Compared to conventional laminators

Ideal for laminating:
- Certificates
- Images
- Documents
- Drawings
- PC prints
- Invitation cards
- Photos
- Calendars
- Maps

SLA 201
LAMINATOR

- Personal A4 laminator
- Laminates documents and photos up to A4 size
- For 150–250 micron pouches (2 × 75 – 2 × 125)
- Quick warm-up: 3–4 minutes
- Easy to use
- Uses 50% less energy*
- Quiet twin-roller feed mechanism
- ABS – quick release of jammed pouches
- Laminating speed: approx. 250 mm/min
- Hot and cold laminating
- Dimensions: 347 × 143 × 63mm
- Weight: 1.1 kg

*Compared to conventional laminators

Ideal for laminating:
- Certificates
- Images
- Documents
- Drawings
- PC prints
- Invitation cards
- Photos
- Calendars
- Maps

SLA 102
PERSONAL LAMINATOR

- Laminates documents and photos up to A4 size
- Hot laminating
- Entry width: 230mm
- For 150–200 micron pouches (2 × 75 – 2 × 100)
- Quick warm-up: 2–4 minutes
- Easy to use
- Stand-by indicator
- Quiet twin-roller feed mechanism
- Laminating speed: approx. 300 mm/min
- Power supply: 230 V / 0.55 A; 145 W
- Dimensions: 330 × 100 × 58mm
- Weight: 0.9 kg

Ideal for laminating:
- Certificates
- Images
- Documents
- Drawings
- PC prints
- Invitation cards
- Photos
- Calendars
- Maps

Others

86 SCOOTER
89 MOBILE PHONES
90 ACTION CAMERAS
92 TIMERS
93 MOBILE RADIOS
94 LIGHTS
95 GAMES

SCOOTER TWO LONG RANGE

Key features:
- Maximum speed up to 25km/h
- Travel range up to 45 km
- Rear wheel suspension
- Aluminium framework
- SENCOR SCOOTER app available at Google Play and APP Store
- LED lighting
- LED display (mode, speed, battery, lighting, Bluetooth)

Drive
- Engine power 400 W

Speed:
- SPORT mode up to 25 km/h
- STANDARD mode up to 20km/h

Range:
- up to 45 km @ 55 kg weight
- up to 7km @ 90 kg weight

Cruise control
- Maximum pitch angle up to 15°

Wheels
- 10-inch front and rear perforated tires
- Dual braking system - electrical and mechanical
- Disc brake

SENCOR SCOOTER app
- Available at Apple App Store and Google Play
- Using application security lock
- Range, distance ridden, running time, speed, battery level, etc.
- Bluetooth 4.1

Technical specifications
- Maximum load 120 Kg
- Dimensions: 112 × 44 × 118 cm (unfolded)
- Dimensions: 112 × 44 × 51 cm (folded)
- Weight: 16 kg
- Working temperature: 0 to 40 ° C
- Storage temperature: 0 to 45 ° C

Adapter
- Input voltage: 100–240V AC 50/60 Hz
- Input current: 2 A
- Output voltage: 42 V
- Connector: Φ 5.5 × 10 mm

Battery
- Capacity: 15Ah Li-ion
- Max. charging time: 9 hours
- Number of cells: 50
- Protection against: short circuit, overvoltage, overcharging, overheating
- Protecting the battery against excessive discharging
- Input charging voltage: 42 V
- Rated voltage: 37 V

SENCOR SCOOTER ONE 2020

Key features:
- Maximum speed up to 25km/h
- Travel range up to 25 km
- Aluminium framework
- SENCOR SCOOTER app
- LED lighting
- LED display (mode, speed, battery, lighting, Bluetooth)

Drive:
- Engine power 350 W

Speed:
- SPORT mode up to 25 km/h
- STANDARD mode up to 20km/h

Range:
- up to 25 km @ 55 kg weight
- up to 20 km @ 90 kg weight

Cruise control
- Maximum pitch angle up to 15°

Wheels
- 8.5-inch front and rear perforated tires
- Dual braking system - electrical and mechanical
- Disc brake

SENCOR SCOOTER app
- Available at Apple App Store and Google Play
- Using application security lock
- Range, distance ridden, running time, speed, battery level, etc.
- Bluetooth 4.1

Technical specifications
- Maximum load 120 Kg
- Dimensions: 108 × 44 × 110 cm (unfolded)
- Dimensions: 108 × 44 × 50 cm (folded)
- Weight: 12.5 Kg
- Working temperature: -10 to 40 ° C
- Storage temperature: -20 to 45 ° C

Adapter
- Input voltage: 100–240V AC 50/60 Hz
- Input current: 1.5 A
- Output voltage: 42 V
- Connector: Φ 5.5 × 10 mm

Battery
- Capacity: 7,5 Ah Li-ion
- Charging time: 4–5 hours
- Number of cells: 30
- Short-circuit, overvoltage and overcurrent protection
- Lifetime: up to 500 cycles
- Input charging voltage: 42 V
- Rated voltage: 36 V

SCOOTER BAG HOOK (2020) SENCOR

Backpack holder for:
- SENCOR SCOOTER ONE 2020
- SENCOR SCOOTER TWO LONG RANGE 2021

SCOOTER CARRYING STRAP (2020) SENCOR

Strap for:
- SENCOR SCOOTER ONE 2020
- SENCOR SCOOTER TWO LONG RANGE 2021

SCOOTER HANDLEBAR BAG (2020) SENCOR

Handlebar bag for:
- SENCOR SCOOTER ONE 2020
- SENCOR SCOOTER TWO LONG RANGE 2021

SCOOTER PHONE HOLDER (2020) SENCOR

Phone holder for:
- SENCOR SCOOTER ONE 2020
- SENCOR SCOOTER TWO LONG RANGE 2021

ELEMENT P013

Display
- Size: 1,77" TFT
- Resolution: 160 × 128

Chipset
- CPU: MT6261D

Memory
- Operating memory: 32MB
- ROM: 32MB
- MicroSDHC card slot (up to 32 GB)

Video recorder
- Rear: 0.08 Mpx (VGA)
- Network/connectivity
- DUAL SIM
- GSM bands 850/900/1800/1900 MHz
- Bluetooth 3.0

Features
- Flashlight
- FM radio
- Vibration ringing
- Video and music player
- Key lock

Other
- Micro USB
- Rechargeable battery: Li-Ion 600 mAh
- Dimensions: 114 × 48 × 14.2 mm
- Weight: 75 g
- Accessories: Charger, user's manual

ELEMENT P012S

MOBILE PHONE FOR SENIORS

Display
- Size: 1,77" TFT
- Resolution: 160 × 128

Chipset
- CPU: MTK6261M
- Memory
- RAM: 32MB
- ROM: 24MB
- MicroSDHC card slot (up to 32 GB)

Camera
- Rear: 0.08 Mpx (VGA)
- Network/connectivity
- Dual GSM 850/900/1800/1900 MHz

Features
- FM
- Flashlight
- Vibration ringing
- Music player, photo viewer
- Key lock, SOS emergency button
- Calendar, alarm clock, file manager, calculator

Other
- Micro USB headphone jack
- Micro USB 2.0
- Battery: Li-Ion 600 mAh
- Dimensions: 116 × 52 × 13 mm
- Weight: 73 g
- Accessories: charging adapter, user manual, docking and charging station

3CAM 4K52WR
ACTION CAMERA

4K Wi Fi Control

- Native 4K recording
- Remote control
- 2.0" colour display
- EIS image stabilization
- Gyro function for stable image

Hardware:
- CMOS SONY 386 image sensor
- Chipset SUNPLUS V35
- 6-layer glass lens
- Integrated Wi-Fi

Video features:
- Viewing angle: 170°
- HDR (High Dynamic Range)

Image resolution (MP4):
- 4K - 3840 × 2160 (60/30fps)
- 2.7K - 2704 × 1520 (30fps)
- 1080p - 1920 × 1080 (120/60/30fps)
- 720p - 1280 × 720 (240fps)

Recording modes:
- H.264 codecs
- Slow motion recording
- Loop recording
- Time-lapse recording

Camera:
- 16 Mpx / 12 Mpx / 8 Mpx / 5 Mpx / 3 Mpx (JPEG)
- Scene modes and exposure setting
- Self timer and burst shooting

Others:
- Waterproofing: 30m
- Support of Micro SHDC/SDXC cards with a capacity up to 128 GB (not included), recording in resolution up to 4K/2K = U3 speed class
- Battery: 3.7 V/ 1,050 mAh Li-Ion
- Built-in speaker
- Micro USB, Micro HDMI
- Dimensions: 60 × 44 × 32mm
- Weight: 70 g

Accessories:
- remote control, battery, waterproof case, helmet attachment kit, attachment kit without waterproof case, attachment kit for selfie stick or tripod, clip for attaching to clothing, attachment kit for attaching to handlebars or bar, tightening straps, 3M adhesive tapes, steel cable, USB data cable, USB charger, instructions, cloth

3CAM 4K04WR
ACTION CAMERA

4K Wi Fi Control

- 4K recording
- CMOS SONY image sensor
- 6-layer glass lens
- Remote control
- 2.0" colour TFT display
- Integrated Wi-Fi

Image resolution:
- 3840 × 2160 (30 fps, MP4)
- 2688 × 1520 (30 fps, MP4)
- 1920 × 1080 (60 fps or 30 fps, MP4)
- 1280 × 720 (120 fps, 60 fps or 30 fps, MP4)

Camera:
- 16 Mpx / 12 Mpx / 8 Mpx / 5 Mpx / 2 Mpx (JPEG)

Others:
- 170° viewing angle
- Waterproofing: 60m
- Slow motion recording
- Loop recording
- Anti-shake system
- PC camera
- Support for MicroSDHC cards up to 64 GB (not included)
- Battery: 2× 3.7 V / 900 mAh Li-Ion
- Built-in speaker
- Micro USB, Micro HDMI
- Dimensions: 59 × 41 × 29 mm
- Weight: 53 g

Accessories:
- 2× batteries, waterproof case, helmet mount set, set for mounting without the waterproof case, selfie or tripod mount set, clothes attachment clip, handle bar or pole mount set, cable ties, 3M adhesive tapes, metal cable, USB data cable, USB charger, user's manual, wiping cloth

3CAM 2002
ACTION CAMERA

FHD

- 2" colour TFT display
- Waterproofing: 30m
- High Dynamic Range (WDR)

Video resolution:
- 1920 × 1080 (30 fps, AVI, interpolated)
- 1280 × 720 (30 fps, AVI)
- 848 × 480 (30 fps, AVI)
- 640 × 480 (30 fps, AVI)

Photography:
- 16/12/10/8/5/3/2/1,3 MPx (JPEG)

Other:
- Viewing angle: 120°
- Loop recording
- Support for Micro SDHC cards up to 32 GB (available separately)
- Battery: 3.7 V/ 900 mAh, Li-Ion
- Built-in speaker
- Micro USB
- Dimensions: 59 × 42 × 30 mm
- Weight: 53 g

Accessories:
- battery, waterproof case, helmet attachment kit, attachment kit without waterproof case, attachment kit for selfie stick or tripod, attachment kit for attaching to handlebars or bar, 3M adhesive tapes, USB data cable, USB charger, instructions, cloth

SST 10
TIMER

- The digital timer allows switching on and off appliances powered by 230 V AC voltage in specified intervals. The timer can switch on and off up to 48 times a day.
- Max. inductive load: 2 A
- Voltage: 230 V, 50 Hz
- Max. load: 16 A, 3,600 W
- Operating temperature: –10 °C to +40 °C
- Clock accuracy: ±5 minutes
- Clock accuracy for 30 minutes: ±5 seconds
- Clock accuracy for 1 hour: ±10 seconds
- Clock accuracy for 6 hours: ±1 minute

SST 11
TIMER

- The digital mechanical timer allows switching on and off appliances powered by 230 V AC voltage in specified intervals. The timer can switch on an off power supply up to 48 times per week in two-hour intervals.
- Max. inductive load: 2 A
- Voltage: 230 V, 50 Hz
- Max. load: 16 A, 3,600 W
- Operating temperature: –10 °C to +40 °C
- Clock accuracy: ±5 minutes

SST 12
TIMER

- The digital timer allows switching on and off appliances powered by 230 V AC voltage in specified intervals. The timer can switch on and off up to 48 times a day.
- Max. inductive load: 2 A
- Voltage: 230 V, 50 Hz
- Max. load: 16 A, 3,600 W
- Operating temperature: –10 °C to +40 °C
- Clock accuracy: ±5 minutes
- Clock accuracy for 30 minutes: ±5 seconds
- Clock accuracy for 1 hour: ±10 seconds
- Clock accuracy for 6 hours: ±1 minute

SST 13
TIMER

- The digital timer allows switching on and off appliances powered by 230 V AC voltage in specified intervals.
  - The timer supports up to 8 on/off programmes.
  - MANUAL ON / AUTO / MANUAL OFF modes can be used for easy control.
- Voltage: 230 V, 50 Hz
- Max. load: 16 A, 3,600 W
- Operating temperature: –10 °C to +40 °C
- Clock accuracy: ±1 minute / month
- Back-up battery: Ni-MH 1.2 V >100h

SMR 601
MOBILE RADIO

- Set of two personal mobile radios
- Range up to 8 km in an open area
- 16 channels with 38 CTCSS codes
- 83 DCS codes for private communication
- Rotary on/off button with volume control
- Automatic channel scanning
- 15 selectable call ringtones
- VOX function
- Channel monitor
- Dual channel watch
- Automatic noise suppression
- Automatic battery saving
- Roger beep ON/OFF
- Key lock ON/OFF
- Key tone ONF/OFF
- Large backlit display
- Battery condition indicator
- Charging and car connector
- 56 × 38 × 162mm (w×d×h)
- Package contents: Two radios, rechargeable batteries, charging stand, power adapter

8 km

SMR 131
MOBILE RADIO

- Set of two personal mobile radios
- Range up to 7 km in an open area
- 16 channels
- Volume setting
- Automatic channel scanning
- Call ringtone
- Channel monitor
- Automatic noise suppression
- Automatic battery saving
- Roger beep
- Key lock ON/OFF
- Backlit display
- Battery condition indicator
- Belt clip
- Connector for headset or charger (not included)
- Power supply: 3 × AAA batteries (not included)
- 51 × 35 × 145mm (w × d × h)

7 km

SMR 112
MOBILE RADIO

- Set of two personal mobile radios
- Range up to 5 km in an open area
- 16 channels with 38 CTCSS codes
- Frequency band: 446 MHz
- 0.5 W transmission power
- Channel scan
- 10 call ringtones
- VOX function
- Channel monitor
- Automatic noise suppression
- Roger beep ON/OFF
- Key tone ONF/OFF
- Key lock
- Torch light
- Backlit display
- Battery saving
- Battery condition indicator
- Power supply: 3 × AAA alkaline batteries (not included)

Table of Contents

- 2 radios
- 2 belt clips

5 km

SLL 87
LIGHT

- A 2-in-1 powerful rechargeable torch light with powerbank. The torch light features two side COB LED lights and a rear red warning light.
- The torch light also features a built-in 4,400 mAh Li-Ion battery and Micro USB and USB-A outputs.

Functions:
- Front light: 100% – 400 lm (8–10 h); 50% – 250 lm (20 h); flash (40 h)
- Side light: 100% – 200 lm (15–20 h); 50% – 100 lm (40 h);
- Rear red light: static / strobe / 360° rotation (20–30 h)
- Power supply: 5 V; 1 A
- Battery type: 2 × 2,200 mAh Li-Ion (3.7 V)
- Powerbank function – output: 5 V; 1 A
- Lighting range: 150 m (400 lm)
- Resistance: IP44
- Weight: 493 g
- Dimensions: 210 × 100 × 145 mm
- Package contents: USB cable; strap

NEW

SLL 57
LIGHT

- LED: COB/SPOT
- Material: ABS

Functions:
- Right button for spot light - narrow beam 100% 200 lm 3.5h; 40% 80 lm 7h; 5% 10lm 30h;OFF
- Left button - wide beam COB
- 100% 45 lm 5h; 40% 20 lm 8h; 2× red light Led on,2 lm 40h; 2× red light SOS,2 lm,60h;OFF
- Power supply: 3.7 V
- Battery type: Li-Ion 1200 mAh
- Connector type: Micro USB cable (cable included)
- Luminous flux: 200 lm (max.)
- Lighting time: 3.5–30 h
- Charging time: 4 h
- Lighting range: 70m
- IP: x7
- Weight: 82 g
- Dimensions: 75 x 59 x 42 mm

SLL 48
LIGHT

- LED: 10 WATT
- Material: aluminium
- Function: adjustable beam width
- Function: 100% / 30% / FLASH / OFF
- Battery type: 6 × AAA
- Luminous flux: 1000 lm
- Lighting range: 300 m

SGM 21

GAME

- Tetris electronic game
- 16 games in 1
- Magic diamond
- Fill blank shooting
- Intelligent plate
- Invader
- Clever frog
- Smart cargator
- Shooter
- Greedy snake
- Tetris
- Running tetris
- Black and white inversion tetris
- Heighten tetris
- Tetris combinations
- Durable plastic keys
- Large easy-to-read display
- Pause key
- Score count
- Multiple level
- Multiple speed
- Volume setting
- Power saving function
- Power supply: 2 × AA batteries (included)
- Packaging: blister
- Dimensions: 176 × 75 × 18 mm

SENCOR®

Laminating foils/pouches

SAP	Model	Format	Thickness	Number of pcs in package
45011728	SLA FA3M250	A3	250 mic (2x125mic)	25
45011741	SLA FA3M150	A3	150 mic (2x75mic)	25
45011743	SLA FA4B250	A4	250 mic (2x125mic)	100
45015625	SLA FA4B200	A4	200 mic (2x100mic)	100
45007724	SLA FA4B150	A4	150 mic (2x75mic)	100
45011744	SLA FA4M250	A4	250 mic (2x125mic)	25
45015626	SLA FA4M200	A4	200 mic (2x100mic)	25
45009008	SLA FA4M150	A4	150 mic (2x75mic)	25
45011730	SLA FA5B150	A5	150 mic (2x75mic)	100
45011729	SLA FA6B150	A6	150 mic (2x75mic)	100
45011751	SLA FAMM150	A4, A5, A6	150 mic (2x75mic)	3x25

SENCOR®

Bluetooth™

Bluetooth Speaker
with IPX6

SIRIUS SSS 6400N **BLACK**

Waterproof **IPX6**

360° Sound

Wireless Stereo

www.sencor.eu

POWER EXTENSION

	MODEL	LENGTH	NUMBER OF OUTLETS	SWITCH	SAP	EAN
	SPC 1	1,5 m	3	×	35030701	8590669089505
	SPC 2	2 m	3	×	35030702	8590669089512
	SPC 3	3 m	3	×	35030703	8590669089529
	SPC 4	5 m	3	×	35030704	8590669089536
	SPC 5	7 m	3	×	35030705	8590669089543
	SPC 6	1,5 m	4	×	35030706	8590669089550
	SPC 7	2 m	4	×	35030707	8590669089567
	SPC 8	3 m	4	×	35030708	8590669089574
	SPC 9	5 m	4	×	35030709	8590669089581
	SPC 10	7 m	4	×	35030710	8590669089598
	SPC 11	1,5 m	5	×	35030711	8590669089604
	SPC 12	2 m	5	×	35030712	8590669089611
	SPC 13	3 m	5	×	35030713	8590669089628
	SPC 14	5 m	5	×	35030714	8590669089635
	SPC 15	2 m	6	×	35030715	8590669089642
	SPC 16	3 m	6	×	35030716	8590669089659
	SPC 17	5 m	6	×	35030717	8590669089666
	SPC 18	1,5 m	3	•	35030718	8590669089673
	SPC 19	2 m	3	•	35030719	8590669089680
	SPC 20	3 m	3	•	35030720	8590669089697
	SPC 21	5 m	3	•	35030721	8590669089703
	SPC 22	7 m	3	•	35030722	8590669089710
	SPC 23	1,5 m	4	•	35030723	8590669089727
	SPC 24	2 m	4	•	35030724	8590669089734
	SPC 25	3 m	4	•	35030725	8590669089741
	SPC 26	5 m	4	•	35030726	8590669089758
	SPC 27	7 m	4	•	35030727	8590669089765
	SPC 28	1,5 m	5	•	35030728	8590669089772
	SPC 29	2 m	5	•	35030729	8590669089789
	SPC 30	3 m	5	•	35030730	8590669089796
	SPC 31	5 m	5	•	35030731	8590669089802
	SPC 32	2 m	6	•	35030732	8590669089819
	SPC 33	3 m	6	•	35030733	8590669089826
	SPC 34	5 m	6	•	35030734	8590669089833
	SPC 36	1,5 m	7	•	50001244	8590669138968
	SPC 37	3 m	6	•	50001245	8590669138975

Diameter wires at all power extension cords is 3 × 1 mm.

IN MANY VERSIONS

MODEL	LENGTH	NUMBER OF OUTLETS	SWITCH	SAP	EAN
SPC 1B	1,5 m	3	×	50001988	8590669192397
SPC 3B	3 m	3	×	50001989	8590669198375
SPC 18B	1,5 m	3	ano	50001990	8590669192403
SPC 20B	3 m	3	ano	50002221	8590669192373
SPC 21B	5 m	3	ano	50002222	8590669192380

MODEL	LENGTH	NUMBER OF OUTLETS	WIRE DIAMETERS	SAP	EAN
SPC 40	1,5 m	1	1 mm	35033595	8590669094783
SPC 41	2 m	1	1 mm	35033596	8590669094790
SPC 42	3 m	1	1 mm	35033597	8590669094806
SPC 43	5 m	1	1 mm	35033598	8590669094813
SPC 44	7 m	1	1 mm	35033599	8590669094820
SPC 45	10 m	1	1 mm	35033600	8590669094837
SPC 46	20 m	1	1,5 mm	35033611	8590669094844
SPC 47	30 m	1	1,5 mm	35033612	8590669094851
SPC 50	25 m	4	1,5 mm	35033613	8590669094868
SPC 51	50 m	4	1,5 mm	35033614	8590669094875
SPC 52	25 m	1	1,5 mm	35042761	8590669132782
SPC 53	50 m	1	1,5 mm	35042762	8590669132799
SPC 60	×	3	×	35033615	8590669094882
SPC 61	×	4	×	35033616	8590669094899
SPC 62	×	3	×	35033617	8590669094905
SPC 63	×	3	×	35033618	8590669094912
SPC 64	×	×	×	35033619	8590669094929
SPC 65	×	×	×	35033620	8590669094936

SENCOR®

Boombox | SPT 5800

with CD, BT, MP3, USB, AUX and FM Radio

7 Disco Led Light Modes

25 W RMS Output Power

Bluetooth™

www.sencor.eu

©2022 Sencor
All rights reserved.
Appliances in this catalogue are subject to change without notice due to technical improvements, colour specifications and stock availability in individual countries. Some appliances may be intended for selected markets only.

SENCOR

FAST ČR a. s., U Sanitasu 1621, 251 01 Říčany, Czech Republic
www.sencor.eu