

SVC 8618GD SVC 8621TI



EN - Cordless Vacuum Cleaner 2in1


Cordless Vacuum Cleaner 2in1 ΕN


Important safety instructions

READ CAREFULLY AND STORE FOR FUTURE USE.

- This vacuum cleaner may be used by children 8 years of age and older and by persons with physical or mental impairments or by inexperienced persons, if they are properly supervised or have been informed about how to use this vacuum cleaner in a safe manner and understand the potential dangers. Children must not play with the vacuum cleaner. Cleaning and maintenance performed by the user must not be performed by unsupervised children. Keep the vacuum cleaner and its accessories out of reach of children that are younger than 8 years of age.
- This vacuum cleaner is designed for use in households, offices and similar types of areas. Do not use it in industrial surroundings or outdoors.
- Do not expose the vacuum cleaner to direct sunlight and do not place it near an open fire or appliances that are a source of heat.
- Only use the vacuum cleaner with the original power adapter, charging base and accessories that were supplied with it.
- Before connecting the adapter to a power socket, check that the technical details on its rating label match the electrical voltage in the power socket.
- Make sure the adapter power cord is not touching a hot surface or sharp objects. Position the adapter power cord so that it will not be tripped over.
- Never submerge the vacuum cleaner, the charging base and the power adapter in water or any other liquid and do not wash under running water.
- Before turning on the vacuum cleaner, check that the internal and external filter is properly installed.
- When the vacuum cleaner is running, ensure that the air outlets and the suction opening are not blocked.
- Do not use the vacuum cleaner to vacuum the following items:
 - smouldering cigarettes, burning items, matches or embers;
 - water and other liquids;
 - flammable or volatile materials;
 - sharp items, e.g. broken glass, needles, pins, etc.;
 - flour, wall plaster, cement and other building materials;
 - larger pieces of paper or plastic bags, which can easily block the suction opening.

- Vacuuming of some types of floors or floor surfaces can create electrostatic discharge, which presents no danger to the user.
- Always turn off the vacuum cleaner when you have finished using it, before cleaning or placing it in the charging base.
- Disconnect the power adapter from the power socket before cleaning it and after it has finished charging.
- Disconnect the power adapter from the power socket by pulling on the plug, never pull on the power cord. Otherwise, this could damage the power adapter or the socket.
- If the power adapter is damaged, it must be replaced with an original type.
 For a replacement power adapter, please contact an authorised service centre.
- Do not use the vacuum cleaner if it is not working correctly, if it has been damaged or has been submerged in water. Do not repair the vacuum cleaner yourself or make any adjustments to it. Have all repairs performed at an authorised service centre. By tampering with the appliance, you risk voiding your legal rights arising from unsatisfactory performance or quality warranty.

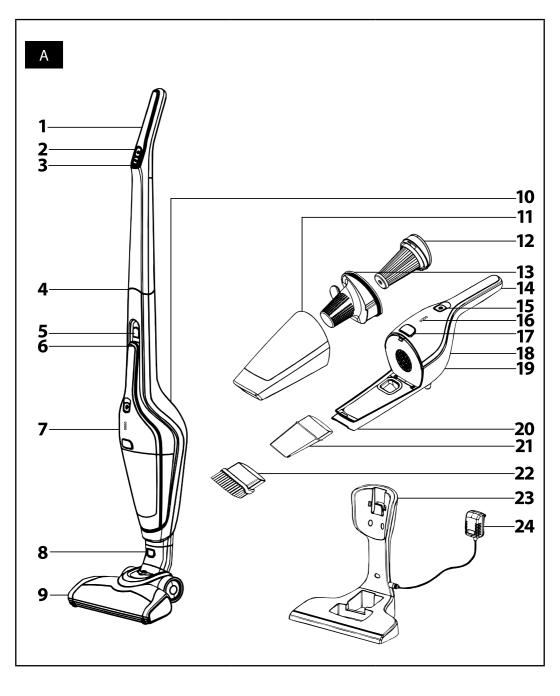

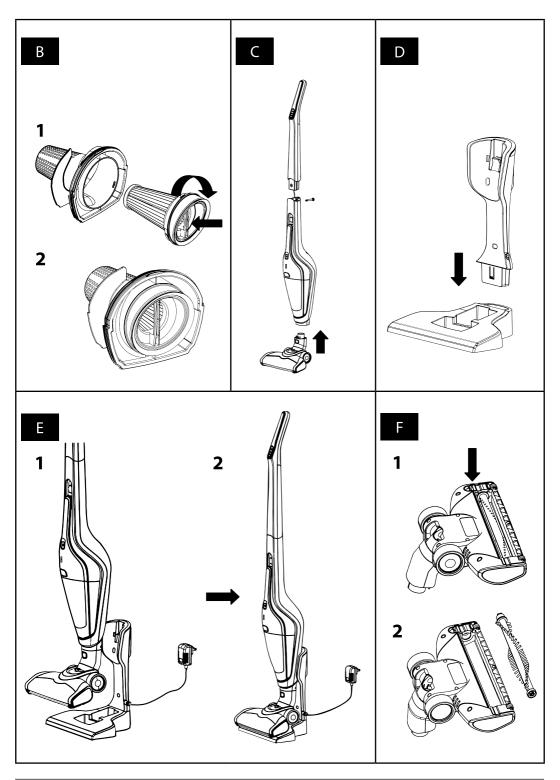

Cordless Vacuum EN Cleaner 2in1

User's manual

- Prior to using this appliance, please read the user's manual thoroughly, even in cases, when one has already familiarised themselves with previous use of similar types of appliances. Only use the appliance in the manner described in this user's manual. Keep this user's manual in a safe place where it can be easily retrieved for future use.
- · We recommend saving the original cardboard box, packaging material, purchase receipt and responsibility statement of the vendor or warranty card for at least the duration of the legal liability for unsatisfactory performance or quality. In the event of transportation, we recommend that you pack the appliance in the original box from the manufacturer.

DESCRIPTION OF THE VACUUM CLEANER AND ITS ACCESSORIES

- Handle of the upright vacuum cleaner
- On/Off button of the upright vacuum cleaner A2
- АЗ Button for setting 2 suction power levels and 2 rotary brush speeds
- located in the joint between the handle and body of the upright vacuum cleaner.
- Δ5 Button for releasing the hand vacuum cleaner from the body of the vacuum cleaner
- Α6 Body of the vacuum cleaner
- Bagless hand vacuum cleaner with the Cyclone system for perfect separation of dust from Α7
- Α8 Floor nozzle release button
- Α9 Floor nozzle with an electric rotary brush
- A10 Air exhaust openings
- A11 Dust container
- A12 Washable internal HEPA type filter
- A13 Washable external filter
- A14 Hand vacuum cleaner holder
- A15 On/Off button of the hand vacuum cleaner
- A16 LED charging level and battery power indicators
- A17 Dust container release button
- A18 Motor unit of the hand vacuum cleaner
- A19 Air exhaust openings
- A20 Hand vacuum cleaner suction opening
- A21 Slot nozzle
- A22 Brush nozzle A23 Charging base with storage space for the slot nozzle and brush nozzle A24 Power adapter

ASSEMBLY AND DISASSEMBLY

1. Hand vacuum cleaner

- Insert the internal filter A12 into the external filter A13 and turn the handle of the internal filter A12 clockwise (see fig. B1), until both filters are joined (see fig. B2). Insert the assembled filter into the dust container A11, and attach the dust container A11 to the motor unit of the hand vacuum cleaner A18.
- It is possible to connect the brush nozzle or slot nozzle A22 or A21, which are a part of the accessories, to the suction opening A20.
- To disassemble, proceed in the reverse sequence. To remove the dust container A11, press button A17 and at the same time remove the dust container A11.

2. Upright vacuum cleaner

- To the body of the upright vacuum cleaner A6, connect the handle A1 so that the connecting cable A4 is inside the connection. Secure the connection with the supplied screw, see fig. C. Into the body of the upright vacuum cleaner A6, insert the assembled hand vacuum cleaner A7 (without attachment A21 or A22). Connect the floor nozzle A9 to the bottom part of the body of the vacuum cleaner A6, see fig. C. The connection of the nozzle A9 is indicated by the button A8 sliding out.
- To disassemble, proceed in reverse sequence. To remove the floor nozzle A9, press the button A8 and at the same time remove the nozzle A9. To take the hand vacuum cleaner A7 out of the body of the upright vacuum cleaner A6, press the button A5 and at the same time take out the hand vacuum cleaner A7.

- Assemble the charging base A23 by inserting the top part into the bottom part (see fig. D). To ensure better stability, the charging base A23 can be attached to a wall using the attached screws, whilst it is necessary to ensure that the charging base A23 is located within reach of a power socket
- To disassemble, proceed in reverse sequence.

PARKING POSITION OF THE VACUUM CLEANER

- Put the upright vacuum cleaner into the parking position by placing the tip of your foot on top of the floor nozzle A9 and with a simple forward movement of the handle A1 secure the vacuum cleaner in the vertical position. The latch located at the front on the elbow of the floor nozzle A9 will slide into the groove on the top cover of the floor nozzle A9.
- To release the upright vacuum cleaner from the parking position, place the tip of your foot on top of the floor nozzle A9 and tilt the handle A1 backwards. The latch located at the front on the elbow of the floor nozzle A9 will slide out of the groove on the top cover of the floor nozzle A9

CHARGING THE VACUUM CLEANER

- Locate the assembled charging base A23 on an even, dry and stable surface within reach of a power socket.
- Connect the connector of the power adapter A24 to the socket located on the side of the charging base A23, and insert the plug of the power adapter A24 into a power socket.
- Place the upright vacuum cleaner, that you have previously turned off and put in the parking position, into the base A23, see fig. E. After being inserted into the charging base A23, the vacuum cleaner will switch to charging mode and the LED indicators A16 will signal the power level of the built-in battery. A full charge requires approximately 6 hours. The actual charging time depends on the power level of the battery.
- . Once the charging process is complete, all the LED indicators A16 will be lit. Disconnect the power adapter A23 from the power socket.



This vacuum cleaner contains a built-in Li-ion battery. To ensure the longest possible lifetime of the battery, we recommend:

- do not unnecessarily leave the battery fully charged or completely flat for too long,
- do not keep the battery permanently fully charged. Its lifetime will be extended by keeping it at approximately half charge.
- do not fully discharge the battery.

USING THE VACUUM CLEANER

1. Upright vacuum cleaner

- You may use the vacuum cleaner for vacuuming various types of floor coverings such as for example hard floor coverings, carpets, etc. · Hold the vacuum cleaner by the handle A1 and pulling it upwards, remove it from the
- charging base A23. After removing from the charging base A23, the vacuum cleaner should be secured in the vertical parking position. After releasing it from the parking position, the handle may be moved in the vertical direction.
- Start the vacuum cleaner by pressing button A2. Use button A3 to regulate the suction power of the vacuum cleaner and the speed of the rotary brush at two levels.
- The LED indicators A16 signal the battery power level. The individual LED indicators A16 will turn off as the battery gradually discharges. If it is discharged fully, all the LED indicators A16 will be off and the vacuum cleaner will stop running.
- When you have finished using it, turn off the vacuum cleaner by pressing the button A2. Clean it according to the instructions contained in chapter Maintenance and cleaning, and allow it to charge according to the instructions contained in chapter Charging the vacuum cleaner.

2. Hand vacuum cleaner

- . Turn on the hand vacuum cleaner by pressing button A15. You may use it for vacuuming locally soiled floor coverings, furniture, etc. Vacuuming hard to reach places is made easier by the slot nozzle A21 and upholstered furniture by the brush nozzle A22.
- When you have finished using it, turn off the vacuum cleaner by pressing button A15 again. Clean it according to the instructions contained in chapter Maintenance and cleaning, and allow it to charge according to the instructions contained in chapter Charging the vacuum cleaner

MAINTENANCE AND CLEANING

 Before cleaning, always make sure that the vacuum cleaner is turned off and the power adapter is disconnected from the power socket.

Dust container and filters

- Disassemble the hand vacuum cleaner A7 according to the instructions in chapter Assembly and disassembly. Remove the contents of the dust container A11, rinse it out with water and thoroughly wipe dry.
- Remove dust and dirt from the external filter A13. Wash it under running water and then dry thoroughly, or allow it to dry naturally.
- . In the event that the internal HEPA type filter A12 is soiled, wash it under a gentle current of running water and allow it to dry naturally.



Attention:

Before assembling the vacuum cleaner, make sure that all its parts are completely dry. Prior to starting it, make sure that all the filters are properly installed in their place. Otherwise, this could damage the vacuum cleaner.

When filters are soiled, their effectiveness is reduced, so do not neglect their cleaning.

· After 6 months of use, we recommend replacing the internal HEPA type filter A12 for a new one. Spare filters are available at brick and mortar, and online stores.

Floor nozzle and attachments

- . If the rotary brush is soiled by hair or animal fur, remove the floor nozzle A9 from the body of the vacuum cleaner A6. Turn it so that the rotary brush is pointing upwards. On the left side of the nozzle A9 there is a latch that secures the brush cover in place, see fig. F1. Release the latch, tilt open the cover and take out the brush (see fig. F2).
- Remove all dirt and dust from the rotary brush and the internal space of the floor nozzle A9. After cleaning, return the rotary brush back in its place. Tilt the cover back and secure in place.
- For cleaning the surface of the floor nozzle A9 and the attachments A21 and A22 use a dry or a lightly dampened cloth. Then wipe everything so that it is thoroughly dry.

Outer surface of the vacuum cleaner

- Clean the outer surface of the vacuum cleaner using a dry or a lightly dampened cloth. Then wipe everything so that it is thoroughly dry. Pay special attention when cleaning the body of the upright vacuum cleaner A6. In the part where the suction opening A20 is located, dust may accumulate, which needs to be removed regularly. . Clean the charging base A23 using a dry or slightly dampened cloth, whilst ensuring that the
- socket for connecting the power adapter plug A24 does not come into contact with moisture. Then wipe everything so that it is thoroughly dry.
- Do not use steel wool, abrasive cleaning products, solvents, etc. to clean the vacuum cleaner.

TECHNICAL SPECIFICATIONS

SVC 8618GD

Power adapter

Input	100-240 V~, 50/60 Hz, 0.3 A
Output	22 V ===, 0.5 A
Electrical shock protection class	
Vacuum Cleaner	
Power input	100 W
Electric rotary brush	5 W
Battery	Li-ion / 18 V === / 2 000 mAh
Time required for charging to full capacity	approximately 6 h
Operating time when fully charged (high/low power)	up to 20/45 minutes
Noise level	78 dB(A)
Dust container canacity	051

SVC 8621TI

Power adapter	
Input	100-240 V~, 50/60 Hz, 0.5 A
Output	
Electrical shock protection class	II
Vacuum Cleaner	
Power input	110 W
Electric rotary brush	5 W
Battery	Li-ion / 21.6 V === / 2 000 mAh
Time required for charging to full capacity	approximately 6 h
Operating time when fully charged (high/low power)	up to 22/50 minutes
Noise level	78 dB(A)

The declared noise emission level of the SVC 8618GD / SVC 8621Tl vacuum cleaner is 78 dB(A). which represents level A of acoustic power with respect to a reference acoustic power of 1 pW.

Explanation of technical terminology

Dust container capacity.

Safety class for electrical shock protection:

Class II - Electrical shock protection is provided by double or heavy-duty insulation.

We reserve the right to change text and technical specifications.


INSTRUCTIONS AND INFORMATION REGARDING THE **DISPOSAL OF USED PACKAGING MATERIALS**

Dispose of used packaging material at a site designated for waste in your municipality.

DISPOSAL OF USED ELECTRICAL AND ELECTRONIC **EOUIPMENT**



This symbol on products or original documents means that used electric or electronic products must not be added to ordinary municipal waste. For proper disposal, renewal and recycling hand over these appliances to determined collection points. Alternatively, in some European Union states or other European countries you may return your appliances to the local retailer when buying an equivalent new appliance.



for more details In accordance with national regulations penalties may be imposed for the incorrect disposal of this type of waste

For business entities in European Union states

If you want to dispose of electric or electronic appliances, ask your retailer or supplier for the necessary information.

Disposal in other countries outside the European Union.

This symbol is valid in the European Union. If you wish to dispose of this product, request the necessary information about the correct disposal method from the local council or from your retailer



This product meets all the basic requirements of EU directives related to it.

DISPOSAL OF BATTERIES



Prior to disposing of the product or handing it over at a specialised collection facility, it is necessary to ensure that the built-in battery is removed. Before removing the battery, it is necessary to start the vacuum cleaner and wait until it is completely flat. Battery removal will be performed at the authorised

The battery contains environmentally damaging substances and therefore does not belong in standard household waste. Their correct disposal will be performed by the respective collection facility.