


SENCOR®

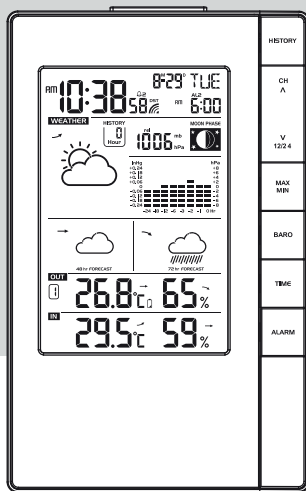

USER'S MANUAL

NÁVOD K OBSLUZE


NÁVOD NA OBSLUHU

HASZNÁLATI ÚTMUTATÓ

INSTRUKCJA OBSŁUGI

EN CZ SK HU PL

SWS 5051

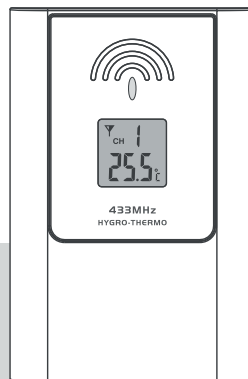

**RC WIRELESS THERMO-HYGRO WEATHER STATION
WITH 3-DAY WEATHER FORECAST**

**RC METEOROLOGICKÁ STANICE S BEZDRÁTOVÝM MĚŘENÍM TEPLOTY/
VLHKOSTI A PŘEDPOVĚDÍ POČASÍ NA 3 DNY**

**RÁDIOM OVLÁDANÁ TEPLOTNO-HYGROLOGICKÁ METEOROLOGICKÁ
STANICA S 3-DŇOVOU PŘEDPOVĚDOU POČASIA**

**RÁDIÓVEZÉRELT VEZETÉKMENTES HŐ- ÉS PÁRATARTALOM-MÉRŐS
IDŐJÁRÁSÁLLOMÁS 3 NAPOS IDŐJÁRÁS-ELŐREJELZÉSEL**


**BEZPRZEWODOWA STACJA POGODOWA RC Z TERMOMETREM
I HIGROMETREM ORAZ 3-DNIOWĄ PROGNOZĄ POGODY**

Thank you for selecting this delicate wireless weather station. Utmost care has gone into the design and manufacture of the clock. This manual is used for DCF / MSF version. Please read the instructions carefully according to the version you purchased and keep the manual well for future reference.

OVERVIEW

MAIN UNIT


1. **[SNOOZE / LIGHT]** key
 - When alarm is sounding, press to stop the current alarm and enter snooze.
 - When alarm is sounding, press and hold for 2 seconds to stop the current alarm, the clock will sound again in the next day.
2. LCD display
3. Wall mount holder
4. **[HISTORY]** key
 - In normal mode, press to display the past 24 hour pressure records.
5. **[CH / ^]** key
 - In normal mode, press to switch between CH 1~3 of outdoor sensor's weather display, or press and hold for 2 seconds to enter auto-cycle mode.
 - In setting mode, press to increase the setting values.

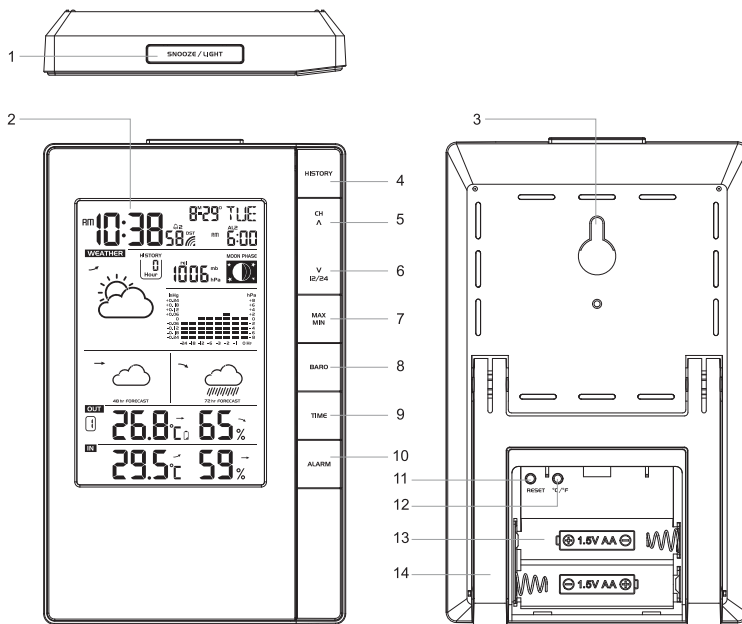


6. **[12/24 / v]** key
 - In normal mode, press to switch between 12 or 24 hour format of time display, or press and hold for 3 seconds to activate wireless sensor pairing mode.
 - In setting mode, press to decrease the setting values.
7. **[MAX / MIN]** key
 - In normal mode, press to check maximum and minimum thermo-hygro reading, or press and hold for 3 seconds to delete both records
8. **[BARO]** key
 - In normal mode, press to switch between hPa (mb) and inHg, or press and hold for 3 seconds to enter the "rel" and "abs" switch mode.
9. **[TIME]** key
 - In normal mode, press to switch between alarm 1 and alarm 2, or press and hold for 2 seconds to enter time setting mode.
 - In time setting mode, press to step the setting.
10. **[ALARM]** key
 - In normal mode, press to turn on/off alarm1 and alarm 2, or press and hold for 2 seconds to enter alarm setting mode.
 - In alarm setting mode, press to step the setting.
11. **[RESET]** key
 - In case of malfunction, press to reset the main unit.
12. **[°C / °F]** key
 - In normal mode, press to switch between Celsius and Fahrenheit, or press and hold for 3 seconds to receive the RC signal once.
13. Battery compartment
14. Table stand

LCD DISPLAY

1. Time and calendar section
2. Weather forecast, Baro pressure & moon phase section
3. Ch. 1-3 temperature & humidity reading
4. Indoor temperature & humidity reading

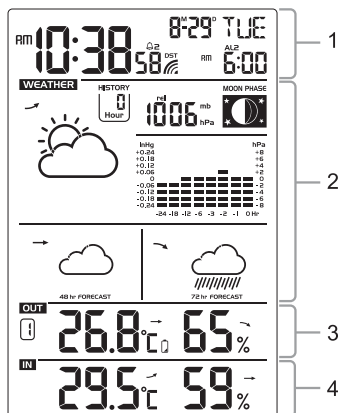

WIRELESS THERMO-HYGRO SENSOR

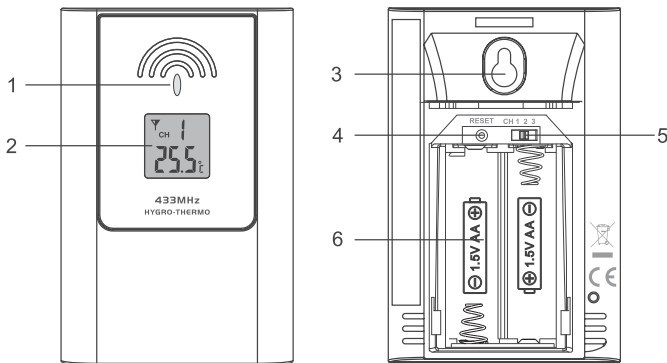

1. LED indicator
 - Flashes when the remote unit is transmitting.
2. LCD display to show the detected temperature or humidity of the sensor.
3. Wall mounting holder
4. **[RESET]** key
 - Press to restart the sensor.
5. **[CHANNEL]** slide switch
 - Assign the transmitter to Channel from 1 to 3.
6. Battery compartment
 - Accommodates 2 × AA size batteries.

GETTING STARTED

WIRELESS SENSOR

1. Remove the battery door.
2. Insert 2 × AA size batteries into the battery compartment. Make sure you insert them the right way according to the polarity information marked on the battery compartment.
3. Replace the battery door.

The sensor will now start transmitting signals, and LED indicator flashes.

NOTE:

- Once the channel is assigned to a sensor, you can only change it by removing the batteries or resetting the sensor, you also need to press and hold **[12/24 / v]** key for 3 seconds on main unit to pair this sensor.
- After replacing the batteries of the wireless sensor or the unit fails to receive wireless sensor signal of a specified channel, you need to press and hold **[12/24 / v]** key for 3 seconds on main unit to pair this sensor again.
- Avoid placing the transmitter in direct sunlight, rain or snow.
- The building material and the position of the receiver and transmitter affect the effective range. So try various locations to obtain the best result.

- Place the units away from metal objects and electrical appliances to minimize the interference. Position the receiver and transmitter within the effective transmission range: 30m in usual circumstances.

MAIN UNIT

1. Remove the battery door and insert 2 × AA batteries into the battery compartment, according to the polarity mark on the battery compartment.
2. After the batteries are installed, all LCD segment will be shown.
3. Press the **[RESET]** key of main unit first.
4. Replace the battery door.
5. After 5 minutes channel searching, it will turn to RC signal reception automatically.
6. Radio Controlled function, the current time & date automatically synchronized with the time signal transmitted from Germany (DCF77) / UK(MSF)

NOTE:

- If no display appears on the LCD after installing the batteries, press the [RESET] key by using a metal wire.
- You may not receive the RCC and wireless sensor(s) signal immediately.
Due to the atmospheric disturbance, the best reception often occurs during night time.

VIEW MULTIPLE WIRELESS SENSOR CHANNELS

1. In normal mode, press **[CH / ^]** key to switch the display between **CH 1~3**.
2. In normal mode, press and hold **[CH / ^]** key for 2 seconds to enter auto-cycle mode, After a “bi” sounds, it will alternately displays the **CH 1~3** at 4 second intervals.
3. During auto-cycle mode, press **[CH / ^]** key again to stop auto-cycle mode and display the current channel.

RECEPTION OF RADIO CONTROLLED SIGNAL

The time and date are radio-controlled. The current time and date are automatically synchronized with the time signal transmitted from Germany (DCF77) or UK (MSF).

When used for the first time (after inserting the batteries or pressing the **[RESET]** key), the clock will start to receive the RC signal after 5 minutes with the signal strength indicator flashing. You can also press and hold **[°C / °F]** key with 3 seconds to receive the RC signal once.

RCC SIGNAL INDICATOR

The signal indicator shows signal receive status. The signal receiving status could be classified into 2 types:

		
No RCC signal received	Receiving RCC signal	Received RCC signal

NOTE:

- Every day the wireless sensor will automatically search for the time signal at 2:00 , 3:00, 4:00 and 17:00.
- Always place the unit away from interfering sources such as TV set, computer, etc.
- Avoid placing the unit on or next to metal plate.
- Closed area such as airport basement, tower block or factory is not recommended.

- Do not start reception on a moving article such as vehicle or train.
- User can permanent disable or enable the RC function by press and hold the **[SNOOZE/LIGHT]** key for 8 seconds.

Permanent enable RC function

Permanent disable RC function

DAYLIGHT SAVING TIME (DST)




This clock has been programmed to automatically switch when the daylight saving time is in effect. User can disable the DST function in time and calendar setting mode.

NOTE:
DST AUTO/OFF setting only available when RCC function is ON.

TIME AND CALENDAR SETTING


1. In normal mode, press and hold **[TIME]** key for 2 seconds to enter date and time setting mode.
2. Press **[CH / ^]** or **[12/24 / v]** key to adjust the setting.
3. Press **[TIME]** key to enter the next setting.
4. The setting sequence: year → DM / MD → month → day → DST AUTO / OFF → hour → minute → second → language → ±23 Hour offset.
5. Press **[TIME]** key or leave the unit for 30 seconds to complete the setting and return to normal mode.

Year setting	
Month/day setting	<div>D/M or M/D</div>
	<div>Month / Day</div>
DST (day light saving) setting	<div>AUTO or OFF</div>

Hour / Minute /Second / setting	 Hour Minute Second
Language	 GB → FR → DE → ES → IT
±23 Hour offset	 00H → 01H...23H → -23H...-01H → 00H

ALARM TIME SETTING AND DISPLAY

1. In normal time mode, press **[TIME]** key to select the alarm 1 or alarm 2.
2. In alarm1/alarm2 mode, press and hold **[ALARM]** key for 2 seconds until alarm hour digit flashes.
3. Press **[CH / ^]** or **[12/24 / v]** key to change the value.
4. Repeat the above operations to set the alarm time in this order: Hour → Minute → Ice pre-alarm on/off.
5. Press **[ALARM]** key or leave the unit for 30 seconds to return to normal mode.

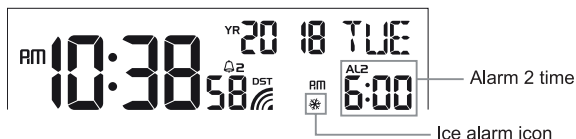



USING ALARM AND SNOOZE FUNCTION

1. Set the desired alarm time as described in the previous section.
2. Or press **[ALARM]** key to turn on alarm 1, press it again to turn on alarm 2, press it thrice to turn on both alarm 1 and alarm 2, with the alarm icons "A1" and / or "A2" displays on the LCD. Press it again to turn off both alarm 1 and alarm 2, with the icons disappear.
3. When clock reach the alarm time, alarm sound will start.

Where it can be stopped by following operation:

- a) Auto-stop after 2 minutes alarming if without any operation and the alarm will activate again in the next day.
- b) By pressing **[SNOOZE / LIGHT]** key to enter snooze that the alarm will sound again after 5 minutes.
- c) By pressing and hold **[SNOOZE / LIGHT]** key for 2 seconds to stop the alarm and will activate again in the next day
- d) By pressing **[ALARM]** key to stop the alarm and the alarm will activate again in the next day.

NOTE:

- The alarm function will turn on automatically once you set the alarm time.
- The snooze could be used continuously in 24 hours.
- During the snooze, the alarm icons “1” and / or “2” will keep flashing.
- The ice pre-alarm will be activated when the alarm 1 and/or 2 is on.
- Once the ice pre-alarm activates, the preset alarm will sound 30 minutes earlier if the outdoor temperature is below -3°C.
- To activate the ice pre-alarm function, pls ensure:
 - a. Turn on the ice pre-alarm function in the alarm setting mode.
 - b. Turn on the corresponding alarm.

READING INDOOR/OUTDOOR TEMPERATURE & HUMIDITY FUNCTION

In normal mode, press [°C / °F] key to switch between °C /°F temperature unit.

The temperature and humidity will display “Hi / Lo / —” on the conditions in the following chart:

Area	Condition	Display
Temperature	Temperature < -40°C	LO
	Temperature > 70°C	HI
Humidity	Humidity < 20%	LO
	Humidity > 90%	HI

NOTE:

- If no signals are received or the transmission is interfered, “- -” will appear on the LCD.
- Relocated the clock or transmitter in other positions and make sure the transmission is within the effective range of 30m approx.

BARO, TEMPERATURE AND HUMIDITY TREND

The Barometric pressure, temperature and humidity trend indicator shows the trends of changes in the forthcoming few minutes. Arrows indicate a rising, steady or falling trend.

Arrow indicator			
Trend	Rising	Steady	Falling

BAROMETRIC/ATMOSPHERIC PRESSURE

TO SELECT THE PRESSURE DISPLAY MODE

1. Press and hold the [BARO] key for 2 seconds to enter select model
2. Press [CH / ^] or [12/24 / v] key to select between:
 - abs — the absolute atmospheric pressure of your location.
 - rel — the relative atmospheric pressure based on the sea.
3. In “abs” mode, press [BARO] key to exit, In “rel” mode, press [BARO] key to set relative atmospheric pressure value in next section.

TO SET RELATIVE ATMOSPHERIC PRESSURE VALUE

1. Get the atmosphere pressure data of the sea level (it is also the relative atmosphere pressure data of your home area) through the local weather service, internet and other weather channels.
2. Press and hold **[BARO]** key for 2 seconds until "abs" or "rel" icon flashes.
3. Press **[CH / ^]** or **[12/24 / v]** key to switch to "rel" mode.
4. Press **[BARO]** key once again until the "rel" atmosphere pressure digit flashes.
5. Press **[CH / ^]** or **[12/24 / v]** key to change its value.
6. Press **[BARO]** key to save and exit the setting mode, or let it exit automatically 30 seconds later without pressing any key.

TO SELECT THE MEASUREMENT UNIT FOR THE BAROMETER






Use the **[BARO]** key to change the unit between hPa (mb) / inHg.

NOTE:

- When power up the main unit, it will display the relative pressure reading and default value is 1013 mb/hPa (29.91 inHg), which refers to the average atmosphere pressure.
- When you change the relative atmosphere pressure value, the weather indicators will change along with it.
- The relative atmosphere pressure is based on the sea level, but it will change with the absolute atmosphere pressure changes after operating the clock for 1 hour.

WEATHER FORECAST

The built-in barometer can notice atmosphere pressure changes. Based on the data collected, it can predict the weather conditions in the forthcoming 24 ~ 72 hours.

					
Sunny	Partly Cloudy	Cloudy	Rainy	Stormy	Snowy

NOTE:

1. The accuracy of a general pressure-based weather forecast is about 70% to 75%.
2. The weather forecast is meant for the next 24 ~ 72 hours, it may not necessarily reflect the current situation.
3. The **Snowy** weather forecast is not based on the atmospheric pressure, but based on the temperature of current channel. When the outdoor temperature is below -3°C, the **Snowy** weather indicator will be displayed on the 24 HOUR FORECAST display section.

PAST 24 HOURS HISTORY PRESSURE RECORD

The current and historical atmosphere is shown near the 24 HOUR FORECAST section.

To check the pressure history in a particular hour during the past 24 hours, press the **[HISTORY]** key.


Each press on the key will go back by an hour.

Under the pressure history mode, press any key (except **[HISTORY]** key) to go back the normal mode, or let it exit automatically 30 seconds later without pressing any key.



HISTORY GRAPH

The history graph is under the time section of the LCD displays that can show the Baro histories in bar chart format.



MAX/MIN RECORD

The main unit preserves the MAX/MIN weather data records since the last manual reset.

1. In normal mode, press **[MAX / MIN]** key once to show the indoor & current outdoor channel maximum temperature and humidity records.
2. Press **[MAX / MIN]** key repeatedly to show the minimum records.
3. Press **[MAX / MIN]** key again to exit.
4. To erase all the MAX/MIN records, press and hold **[MAX / MIN]** key for 3 seconds.



MOON PHASE

The main unit can show the northern hemisphere moon phase status, below is the table which illustrate how the moon will appear on the main unit.

Moon Phase Icon	Description	Moon Phase Icon	Description
	New Moon		Full Moon
	Waxing Crescent		Waning Gibbous
	First quarter		Third quarter
	Waxing Gibbous		Waning Crescent

LOW BATTERY ICON

When the battery indicator “” appear on the clock section or the LCD becomes dim, replace with 2 new AA size batteries at once; while If the low battery indicator “” appear in the outdoor section, it indicates that the battery power of the transmitter is not enough, and you should replace with 2 × AA size batteries at once.

Outdoor sensor low battery status	Main unit low battery status
	

IMPORTANT NOTE

- Read and keep these instructions.
- This main unit is intended to be used only indoors.
- Do not subject the unit to excessive force, shock, dust, temperature or humidity.
- Do not cover the ventilation holes with any items such as newspapers, curtains etc.
- Do not immerse the unit in water. If you spill liquid over it, dry it immediately with a soft, lint-free cloth.
- Do not clean the unit with abrasive or corrosive materials.
- Do not tamper with the unit's internal components. This invalidates the warranty.
- Only use fresh batteries. Do not mix new and old batteries.
- Do not dispose old batteries as unsorted municipal waste. Collection of such waste separately for special treatment is necessary.
- Attention! Please dispose of used unit or batteries in an ecologically safe manner.
- Technical specifications and user manual contents for this product are subject to change without notice.



SPECIFICATIONS

MAIN UNIT

Dimensions (W × H × D)	100 × 161 × 21.5mm
Main power	2 × AA size 1.5V batteries
Barometer display range	540 to 1100hPa, 15.95 to 32.49inHg
Operating temperature range	-5°C to 50°C (23°F to 122°F)
Display temperature range (In / Outdoor)	-40°C to 70°C (-40°F to 158°F)
Display humidity range (In / Outdoor)	RH 20% to 90 %
Resolution of temperature	1 decimal place of °C/°F (above -10°C / °F) Integer of °C/°F (below -10°C / °F or above 100 °F)
Resolution of humidity	1%
Number of sensors support	Up to 3 units
Radio controlled signal	DCF 77 / MSF (depend on the country version)

WIRELESS SENSOR

Dimensions (W × H × D)	65 × 100 × 35mm
Main power	2 × AA size 1.5V batteries (Lithium battery recommended for low temperature environment)
Operating temperature range	-20°C to 60°C (-4°F to 140°F)
Operating humidity range	RH 1% to 99 %
RF frequency	433MHz
RF transmission range	30 meters

INSTRUCTIONS AND INFORMATION REGARDING THE DISPOSAL OF USED PACKAGING MATERIALS

Dispose of packaging material at a public waste disposal site.

DISPOSAL OF USED ELECTRICAL AND ELECTRONIC APPLIANCES



The meaning of the symbol on the product, its accessory or packaging indicates that this product shall not be treated as household waste. Please, dispose of this product at your applicable collection point for the recycling of electrical & electronic equipment waste. Alternatively in some states of the European Union or other European states you may return your products to your local retailer when buying an equivalent new product. The correct disposal of this product will help save valuable natural resources and help in preventing the potential negative impact on the environment and human health, which could be caused as a result of improper liquidation of waste. Please ask your local authorities or the nearest waste collection centre for further details. The improper disposal of this type of waste may fall subject to national regulations for fines.

For business entities in the European Union

If you wish to dispose of an electrical or electronic device, request the necessary information from your seller or supplier.

Disposal in other countries outside the European Union

If you wish to dispose of this product, request the necessary information about the correct disposal method from local government departments or your seller.



The product meets EU requirements.

Hereby, FAST ČR, a.s. declares that the radio equipment type SWS 5051 is in compliance with Directive 2014/53/EU.

For the full version of the EU declaration of conformity, please refer to the following website: www.sencor.eu

Changes in the text, design and technical specifications may change without prior notice and we reserve the right to make these changes.

The original version is Czech.

Manufacturer: FAST ČR, a.s., Černokostelecká 1621, Říčany CZ-251 01

SENCOR®

EN Warranty conditions

Warranty card is not a part of the device packaging.

This product is warranted for the period of 24 months from the date of purchase to the end-user. Warranty is limited to the following conditions. Warranty is referred only to the customer goods using for common domestic use. The claim for service can be applied either at dealer's shop where the product was bought, or at below mentioned authorized service shops. The end-user is obligated to set up a claim immediately when the defects appeared but only till the end of warranty period. The end user is obligated to cooperate to certify the claiming defects. Only completed and clean (according to hygienic standards) product will be accepted. In case of eligible warranty claim the warranty period will be prolonged by the period from the date of claim application till the date of taking over the product by end-user, or the date the end-user is obligated to take it over. To obtain the service under this warranty, end-user is obligated to certify his claim with duly completed following documents: receipt, certificate of warranty, certificate of installation.

This warranty is void especially if apply as follows:

- Defects which were put on sale.
- Wear-out or damage caused by common use.
- The product was damaged by unprofessional or wrong installation, used in contrary to the applicable instruction manual, used in contrary to legal enactment and common process of use or used for another purpose which has been designed for.
- The product was damaged by uncared-for or insufficient maintenance.
- The product was damaged by dirt, accident of force majeure (natural disaster, fire, and flood).
- Defects on functionality caused by low duality of signal, electromagnetic field interference etc.
- The product was mechanically damaged (e.g. broken button, fall).
- Damage caused by use of unsuitable media, fillings, expendable supplies (batteries) or by unsuitable working conditions (e.g. high temperatures, high humidity, quakes).
- Repair, modification or other failure action to the product by unauthorized person.
- End-user did not prove enough his right to claim (time and place of purchase).
- Data on presented documents differs from data on products.
- Cases when the claiming product cannot be indentified according to the presented documents (e.g. the serial number or the warranty seal has been damaged).

Authorized service centers

Visit www.sencor.eu for detailed information about authorized service centers.